

PRODUCT **2008** CATALOG

Ace

ATLANTIC CHEMICAL
& EQUIPMENT COMPANY



PRODUCTS FOR THE HVAC/R INDUSTRY



TABLE OF CONTENTS

Coil Cleaners	3	Glycol Based Anti-Freeze Products	14
Alkaline (Non-Acid) Foaming		Cooling Tower Products	
Acid (Foaming)		Scale Removers	
Detergent Based		Cooling Tower Products <i>continued</i>	15
Special Environment		Scale & Corrosion Inhibitors	
Aerosol Products	4	Acid Pump	
Coil Cleaners		Algaecides	
Specialized Coatings		Closed Loop Cleaners & Treatments	
Aerosol Products	5	Cooling Tower Products <i>continued</i>	16
Insecticides		Additives	
Degreasing Solvents		Cooling Tower Management Equipment	
Lubricants		Steam Boiler Treatments	17
Roof Repair Products		Hot Water / Steam Boiler Treatments	
Spray Adhesives		Fuel Oil Products	18
Contact Cleaners		Multi-Purpose Additives	
Air Filter Cleaning Treatments		Adhesives / Cements	
Condensate Pan Repair		Soot Removal	
IAQ Products	6	Sludge / Algae Treatments	
Premium Drain Pan Treatments		Odor Control	
Standard Drain Pan Treatments		Water / Ice Dispersants	
Sanitizers & Disinfectants		Ice Machine Treatments / Water Filter Products	19
IAQ Products	7	Cleaners	
Coil Coatings		Ice Machine Sanitizers	
Miscellaneous Products		Everpure Quick Change Filter Heads	
Condensate Pan Repair Products	8	Everpure Replacement Cartridges	
Refrigerant Line Flushing / Acid Removal		Water Filter Products <i>continued</i>	20
Duct Sealants & Accessories		Inline Filters	
Insulation / Sealants / Caulking	9	Replaceable Cartridges	
Odor Control Products		Filter Housings	
Leak Detection / Smoke Bombs / Roof Repair	10	Ice Machine Water Filter Sizing Guide	
Degreasing Solvents		Fleet Maintenance	21
Oil Absorbent Pads		Cleaners, Polishes, Waxes	
Hand Cleaning Products	11	Miscellaneous Products	
PVC Products		Heat Blocking Products	
Threaded Pipe Products		ACE Display Rack	22
Refrigeration Oil Products	12	Index	23
Mineral Oils			
Alkyl Benzene Oils			
Polyol Ester Oils			
Additional Oil Products			
Hoses, Water Nozzles, Sprayers	13		

ACE TECH TIP

Look for these Tech Tip boxes throughout the catalog for helpful information on using Ace Chemical Products.

COIL CLEANERS

Alkaline (Non-Acid) Foaming

ACE FOAM N' CLEAN (FNC)

Super high foaming, deodorized, biodegradable, alkaline coil cleaner recommended for cleaning and brightening aluminum finned cooling and heating coils. The strong foaming action penetrates beneath contamination and pushes dirt and grease from the coil to the outer surface. USDA authorized for use in federally inspected plants. Dilution rate of 1 part product to 3 or 4 parts water.

- FNC1 – 1 gallon - 4/cs
- FNC2.5 – 2.5 gallon - 2/cs
- FNC5 – 5 gallon
- FNC55 – 55 gallon



ACE MASTERCLEAN COIL CLEANER (MCC)

A high performance, controlled foaming cleaner formulated with additional surfactants/penetrants to ensure maximum cleaning/brightening of heavily soiled aluminum finned cooling/heating coils, condensers and evaporators. Contains a deodorant for enhanced use on residential evaporators. USDA authorized for use in federally inspected plants. Dilution rate of 1 part product to 3 parts water.

- MCC1 – 1 gallon - 4/cs
- MCC5 – 5 gallon
- MCC55 – 55 gallon



ACE ALKALINE COIL CLEANER (ACC)

Economy grade foaming non-acid product recommended for cleaning aluminum finned cooling and heating coils. Strong foaming action penetrates contamination and pushes dirt and grease from the coil to the outer surface. Dilution rate 1 part product to 3 parts water.

- ACC1 – 1 gallon - 4/cs
- ACC5 – 5 gallon
- ACC55 – 55 gallon



Acid (Foaming)

ACE SUPREME COIL CLEANER (CSF)

Heavy-duty, high foaming hydrofluoric acid-based cleaner and brightener formulated for use with aluminum finned and other air cooled condensers. Strong foaming action that penetrates beneath contamination and pushes dirt and grease from the coil to the outer surface. Dilution rate of 1 part to 3 parts water.

- CSF1 – 1 gallon - 4/cs
- CSF5 – 5 gallon
- CSF55 – 55 gallon



Special Environment

ACE ENVIRO-SAFE (ECS)

Environmentally-safe cleaner, degreaser and deodorizer specifically designed to clean air conditioning coils where a neutral pH cleaner is required. Ideal for applications where local sewer regulations require wastewater run-off to be maintained between 6-9 on the pH scale. Formulated with a pH of 8, this product is not designed to brighten aluminum-finned coils.

- ECS1 – 1 gallon - 4/cs
- ECS5 – 5 gallon
- ECS55 – 55 gallon



ACE SUPER D (ASD)

High performance triple action cleaner for both evaporator and condenser coils. Cleans, degreases and deodorizes. Contains inhibitor to prevent attack on aluminum. Low foam action. "No-Rinse" at 1 part product to 10 parts water ratio. Use at a 1 to 6 dilution rate for condensers and other applications.

- ASD1 – 1 gallon - 4/cs
- ASD5 – 5 gallon
- ASD55 – 55 gallon

ACE EVAP-KLEAN NON-RINSE EVAPORATOR COIL CLEANER (CCL)

Our original non-acid formulation for cleaning of multi-row evaporator coils in heating and air conditioning units. Also suitable for cleaning electronic air filters and permanent air filters. USDA authorized for use in federally inspected plants. Dilution rate 1 part product to 3 parts water or 1:7 ratio when allowing condensate to rinse off.

- CCL1 – 1 gallon - 4/cs
- CCL5 – 5 gallon
- CCL55 – 55 gallon



ACE KLEAN HD (HDC)

Formulated especially for cleaning heavy concentrations of grease and dirt from fans, evaporators, condensers, permanent-type air filters and electronic air filters. Dilution rate of 1 part product to 3 parts water.

- HDC1 – 1 gallon - 4/cs
- HDC5 – 5 gallon
- HDC55 – 55 gallon



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

AEROSOL PRODUCTS

Coil Cleaners

ACE FOAM BLAST (FBA)

Ultra-powerful “foam gun” aerosol spray with additional grease dissolving agents added for quick cleaning action. Ideal for use on A/C coils, oily machines, exhaust fans, etc. Contains fresh citrus aroma. “Non-rinse” formula for evaporators.

FBA – 16 oz. net - 12/cs



ACE BIO-KLEEN COIL CLEANER (BKA)

Non-toxic, biodegradable, bio-enzymatic, foaming coil cleaner for removing mold/fungus, stains and odors from drain pans and evaporator coils. “Non-rinse” formula for evaporators.

BKA – 18 oz. net - 12/cs



ACE FOAM N’CLEAN AEROSOL (FNA)

High foaming non-acid coil cleaner removes grease, oil, dirt, etc., from aluminum-finned cooling and heating coils. Strong directional spray forces cleaner deep into multi-row coils. High foaming action flushes contamination to coil surface for easy water flush removal. Must be rinsed.

FNA – 20 oz. net - 12/cs



ACE FOAMING COIL CLEANER (FCA)

Non-acid, thick foaming, non-flammable aerosol suitable for use in hard access areas and small jobs. Ideal for condenser and evaporator coils, walk-in coolers, ventilators, refrigerators, etc. “Non-rinse” formula for evaporators.

FCA – 19 oz. net - 12/cs



ACE POWER BLAST (CCA)

Solvent-based aerosol removes build-up of dirt, grease, etc., from all types of extended heating or cooling fins. Solvent completely evaporates leaving no residue. “Non-rinse” formula for condensers and evaporators.

CCA – 18 oz. net - 12/cs



Specialized Coatings

ACE PIPE KOTE (PKA)

Cold pipe insulation prevents sweating of cold water pipes, refrigeration lines, etc., as well as valves and fittings. Can be applied to wet or dry pipes. Coverage rate is 8 to 10 square feet depending on thickness.

PKA – 15 oz. net - 12/cs



ACE COLD GALVANIZING (CGA)

High-solids zinc coating that bonds to metal surfaces to prevent corrosion and rust creepage. Can be painted after coating has cured.

CGA – 14 oz. net - 12/cs



ACE RUST BARRIER (RBA)

Flexible, transparent anti-corrosive coating provides a long-term, non-tacky film effective in temperatures ranging from -407°F to 1757°F. Can easily be removed with mineral spirits. Coverage rate is 75-100 sq. ft.

RBA – 14 oz. net - 12/cs



ACE CONDENSERKOTE (CKA)

High-quality polyelastomer coating protects A/C aluminum finned tube coils, A/C cabinets, compressors and all non-electric components in the A/C system from corrosion, salt air spray, acid rain, etc., with a tough, durable film that will not crack or peel. Affect on heat transfer is less than 0.1%. Coverage rate for **Blue** is 24 sq. ft. Coverage rate for **Clear** is 19 sq. ft.

CKA – Blue - 18 oz. net - 12/cs

CKA – Clear - 14.5 oz. net - 12/cs



ACE SUR-GRIP BELT DRESSING (BDA)

Reduces belt slippage and increases belt life and equipment efficiency. Non-chlorinated.

BDA – 12 oz. net - 12/cs



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

 Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

Ace

AEROSOL PRODUCTS

Insecticide Products

ACE WASP AND HORNET SPRAY (WHA)

Patented aerosol spray that instantly freezes wasps and hornets for quick knockdown. 20-foot trajectory throughout entire life of the can. Safe for use near electrical circuitry with up to 25,000 volt dielectric strength.

WHA – 14 oz. net - 12/cs



ACE BUG BAN (ABS) DISCONTINUED

A highly effective all-natural, non-DEET, insect repellent blended from active ingredients widely used in the food and cosmetic industry. Will repel mosquitoes, chiggers, biting flies, no-see-ums, fleas and ticks.

ABS – 5 oz. net - 12/cs



Lubricants

ACE BOLT BUSTER (BOA)

Super-fast penetrating lubricant specifically formulated to rapidly break through rust and corrosion to loosen frozen nuts, bolts and mechanical parts.

BOA – 18 oz. net - 12/cs



ACE MECHANIC'S CHOICE (MCA)

Chlorinated, high performance, quick-acting, high-solvency, all-purpose spray formulated to penetrate, lubricate and de-moisturize while leaving surfaces with a "never-dry" corrosion retardant.

MCA – 18 oz. net - 12/cs



ACE SILICONE RELEASE SPRAY (SRA)

Food grade stainless, waxless, all-purpose dry lubricant. SRA will act as a waterproofer, corrosion inhibitor, etc. Also eliminates squeaks. USDA authorized.

SRA – 11 oz. net - 12/cs



Degreasing Solvent

ACE SUPER DEGREASING SOLVENT (SDA)

A powerful, non-flammable, non-conductive solvent-based cleaner emulsifies grease, oil, grime and tar etc. Safe to use on electrical equipment even while in operation. Ideal for cleaning engine parts, motors, starters, relays, bearings, gears, etc. Has a dual valve spray system for both pin-point and flushing action.

SDA – 18 oz. net - 12/cs



Roof Repair Products

ACE ROOFSEAL (RSA)

Seals leaks, cracks, seams, etc., around rooftop air-conditioning units, vents, chimneys, skylights, etc. Can also repair cracks and holes, etc., in most roofing materials. Sprays as a liquid and dries to a thick black rubberized coating.

RSA – 14 oz. net - 12/cs



Spray Adhesives

ACE HEAVY DUTY SPRAY ADHESIVE (SPA)

Heavy-duty spray adhesive with wide web spray pattern to provide a temporary or permanent bond of materials such as duct liner, fiberglass insulation, cardboard, most plastics, polyethylene, etc.

SPA – 12 oz. net - 12/cs



Contact Cleaners

ACE HIGH PURITY CONTACT CLEANER (HPA)

High performance contact cleaner suitable for removing grease, dirt, etc., from even the most sensitive electronic equipment. Non-chlorinated, non-flammable formula.

HPA – 12 oz. net - 12/cs



ACE QD CONTACT CLEANER (QDA)

Quick-drying, non-residue, high-purity, economy grade contact cleaner. Safe for use on circuit and PC boards, relays, switches, contacts, etc. Not intended for use on "energized" equipment.

QDA – 16 oz. net - 12/cs



Air Filter Cleaning Treatments

ACE AIR CONDITIONER FILTER SPRAY (FSA)

Attracts dust and odors like a magnet, providing recycling of cleaner and fresher air.

FSA – 14 oz. net - 12/cs



Condensate Pan Repair

ACE PAN PATCH (PPA)

Flexible, non-chlorinated, non-asphalt spray coating for sealing out rust, corrosion and repairing leaks in metal or plastic condensate drain pans. Can be used for repairing swamp coolers and cooling towers. Dries in 2 to 4 hours depending on heat and humidity. Coverage rate 12 to 20 square feet per can depending on thickness.

PPA – 14 oz. net - 12/cs



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.



 Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

IAQ PRODUCTS

Premium Drain Pan Treatments

ACE PAN-CLEAN TABS (PCT)

Forms a gel-like substance after coming into contact with condensate water that locks product in place on pan. Slowly releases cleaning agents for up to six months - thereby ensuring block and odor-free drain lines. Completely dissolves to insure no waste disposal problems. Computer room safe.

PCT3 – treats under 3 tons
12 tabs/bottle - 12 bottles/cs

PCT7 – treats up to 7.5 tons
8 tabs/bottle - 12 bottles/cs

PCT15 – treats up to 15 tons
4 tabs/bottle - 12 bottles/cs



ACE PAN PROTECTORS (TR)

An EPA registered, controlled time-release drain pan treatment prevents bacterial, fungal, algal growth, etc., while keeping drain lines clear for up to six months. Contains odor counteractants, corrosion inhibitors and cleaning surfactants for additional performance. Computer room safe.

TR14 – treats 1 ton or less
10 strips/pack - 12 packs/case - 120/cs total

TR28 – treats up to 2 tons
6 strips/pack - 14 packs/case - 84/cs total

TR65 – treats 5 tons or less
4 strips/pack - 20 packs/case - 80/cs total

TR150 – treats 10 tons or less
2 strips/pack - 20 packs/case - 40/cs total

TR300 – treats up to 25 tons
1 strip/pack - 24 packs/case - 24/cs total

TR300D – treats up 50 tons
1 strip/pack - 12 packs/case - 12/cs total



Standard Drain Pan Treatments

ACE DETERGENT TABS (DTJR)

Easy-to-use slow dissolving cleaners maintain humidifiers, condensate drains and pans in good working order while reducing odors. Formulated for use in food processing factories. Tablet size 5/8" x 1/4". Computer room safe.

DTJR – 200 tabs/bottle - 12 bottles/cs



ACE DETERGENT TABS (DT)

Larger size drain pan tablets for commercial/industrial applications. Slow dissolving formula. Helps reduce odor and keeps pans in good working order. Tablet size 1-3/4"x1/4". Computer room safe.

DT2 – 15 tabs/bottle - 12 bottles/cs
DT10 – 75 tabs/bucket - 4 buckets/cs
DT100 – 750 tabs/pail



ACE TECH TIP

It is important to clean drain pans thoroughly before using any ACE Drain Pan Treatment. ACE Drain Pan Treatments are designed to inhibit microbial growth. In addition, all ACE Drain Pan Treatments contain corrosion inhibitors to prevent rust in metal drain pans.

Sanitizers & Disinfectants

ACE ECOTREAT (ECT)

"Environmentally-friendly" / pleasant smelling chlorine dioxide bacteriostat / fungistat / deodorizer. Registered with the EPA for use in HVAC/R systems. For treating indoor coils and drain pans; also for fogging into ductwork. Can be fogged or sprayed while building is occupied.

ECT32 – 32 oz. - 12/cs **ECT** – 5 gallon
ECT1 – 1 gallon - 4/cs



**COILS
DRAIN PANS
DUCTWORK**

ACE BACTI-GARD (BTG)

Ready-to-use EPA registered hard surface disinfectant specifically labeled for use on coils and drain pans of air-conditioning and refrigeration equipment and heat pumps. Effective mildewstat inhibits growth of mold and mildew. Apply to coil and drain pan with sprayer only. Do not fog into ductwork or air stream.

BTG32 – 32 oz. - 12/cs **BTG5** – 5 gallon
BTG1 – 1 gallon - 4/cs **BTG55** – 55 gallon



**COILS
DRAIN PANS**

ACE OXINE (MTR)

Chlorine dioxide-based sanitizer is specifically registered with the EPA for use in HVAC systems. May be fogged into severely contaminated spaces. Requires strict safety procedures including building evacuation. Proven to be effective against Legionella Pneumophila.

MTR – 3.25 oz. bottles - 12/cs



**DUCTWORK
EVACUATE BUILDING**

ACE TECH TIP

Proper air filtration and clean coils are important features of any good Indoor Air Quality program. In addition, it is important to insure that the wet confines of the condensate drain pan are protected against microbial growth. Utilizing **ACE Pan Protectors (TR)** will eliminate legionella pneumophila, the causative agent of Legionaire's Disease and many other viruses and organisms.

ACE Pan Protectors (TR) are widely used by maintenance departments in school systems, airports, hospitals, hotel chains, etc., throughout the U.S. as part of a comprehensive Indoor Air Quality program.

For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

 Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

Ace

Coil Coatings

ACE BIO-KLEAR (BKS)

Solvent-based film-former containing an EPA registered microbiocide, designed to keep cooling coils, drain pans, drain lines and other air handler hard surfaces clean and odor-free for up to six months. Contains a 2 bottle (liquid / powder) system.

BKS – 16 oz. - 6 sets/cs



ACE MICROSHIELD (MSH)

Patented, durable polyelastomer coating formulated with an “environmentally-friendly” EPA-registered broad spectrum anti-microbial agent, INTERSEPT (EPA Reg. #43670-1), which inhibits bacterial, fungal and mold growth on evaporator coils for up to 12 months.

MSH32 – 32 oz. - 12/cs
MSH1 – 1 gallon - 4/cs
MSH5 – 5 gallon
MSH55 – 55 gallon



ACE MICRO-KLEEN KIT (MKK)

The industry’s most complete I.A.Q. kit contains everything needed to treat most I.A.Q. problems, including “Dirty Sock Syndrome.” Contains **Super D** coil cleaner for cleaning and **Bacti-Gard** for disinfecting the indoor coil / drain pan area. Also included are **TR Pan Protectors** for long-lasting drain pan treatment and **Microshield** antimicrobial coil treatment for inhibiting growth on coils for up to 12 months.

MKK – 1/cs



ACE DIP SLIDES (DPS)

Easy-to-use malt/TTC agar used to monitor mold, fungal, algal growth in fluids or on surfaces. Comes with instructions regarding use and measurement guidelines. Ideal for monitoring mold/mildew growth on evaporators, or inside ductwork/registers.

DPS – 10 slides/cs



ACE TECH TIP

DUCT TREATMENT AND SANITIZING

Routine maintenance and light contamination:

Use **ACE Fogger (AFS)** to fog ductwork with **ACE Ecotreat (ECT)**. Have ductwork mechanically cleaned by vacuuming or brushing.

Severe contamination:

Mechanically clean ductwork by vacuuming or brushing. Fog **ACE Oxine (MTR)** into ductwork to sanitize system. Building must be evacuated prior to application. For professional use only.

ACE TECH TIP

For best results when treating indoor coils to solve IAQ problems, ACE recommends a **THREE-STEP PROGRAM**.

1. **CLEAN** the coil with an approved coil cleaner such as **ACE Super D (ASD)** no-rinse coil cleaner.
2. **APPLY ACE Bacti-Gard (BTG)** to eliminate bacteria, mold and other contaminants.
3. **TREAT** the drain pan (after cleaning the pan) with **ACE Drain Pan Protectors (TR)** for long lasting protection.

Miscellaneous Products

ACE CHEMICAL FOGGER (AFS)

Heavy-duty co-polymer tank with 115 volt pump and 4 ft. hose. Fully adjustable spray output from 20-80 microns. Use for fogging solutions into ductwork and other spaces. Ideal for use with **Ecotreat** or **Oxine**.

AFS – Sold individually



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

CONDENSATE PAN REPAIR

ACE WATER STOP (AWS)

Black, elastomeric sealant seals cracks, fissures, small holes in roofs and in plastic or metal air conditioner drain pans. Can also be used to seal and protect drain pans from corrosion. Coverage rate 20 to 30 square feet depending on thickness. Dries in 4 to 6 hours, completely cures in 24 hours.

AWS32 – 32 oz. - 12/cs AWS1 – 1 gallon - 4/cs



ACE PAN PATCH (PPA)

Flexible, non-chlorinated, non-asphalt spray coating for sealing out rust, corrosion and repairing leaks in metal or plastic condensate drain pans. Can also be used for repairing swamp coolers and cooling towers. Dries in 2 to 4 hours depending on heat and humidity. Coverage rate 12 to 20 square feet per can depending on thickness.

PPA – 14 oz. net - 12/cs



REFRIGERANT LINE FLUSHING / ACID REMOVAL

ACE POWER FLUSH (APF)

Powerful ozone-friendly solvent for flushing HVAC/R systems after compressor burn-outs and during retrofits / oil changes. Leaves no residue and is safe for use with systems using all oils and refrigerants. Approved under the EPA's S.N.A.P. program and is non-flammable. Ideal for flushing lines after conversion to R-410A. Use with **ACE Flush Injection Tool (AFT)**.

APF16 – 16 oz. - 6/cs
(for systems from 5 to 7 tons capacity)



ACE FLUSH INJECTION TOOL (AFT)

Flush contaminated HVAC/R systems quickly, easily and economically with the injection tool. Re-usable tank comes with an injection gun that allows user to inject system without need for access valves or manifold gauges. Uses dry nitrogen (not supplied) for propellant. Holds enough **ACE Power Flush** to clean a 25 ton system.

AFT – Sold individually



ACE POWER FLUSH KIT (APFK)

Complete and easy-to-use Power Flush Kit includes the **ACE Flush Injection Tank**, 16 oz. **Power Flush** and **Hose / Injection** assembly. The unique injection nozzle system saves time when flushing and eliminates manifold gauges and the use of separate access valves. One time purchase flush tank simply refills with **Power Flush** cans at left. Uses dry nitrogen propellant – not included. Ideal for flushing sets after conversion to 410A Refrigerant.

APFK – Sold individually

REFILL AVAILABLE:
Order APF16 for refills

ACID AID (AAA)

Acid removal solution for all refrigerants and oils. Super-concentrated formula requires only half the dose of competitive products (2 oz per gallon of oil.) Leaves no residue or salts in system.

AAA – 2 oz net - 12/cs



IDEAL FOR R-410A
LINESET
CLEANING



DUCT SEALANTS & ACCESSORIES

ACE FAST TACK (FSC)

High solids, non-cobwebbing, solvent based duct liner adhesive. Clear in color.

FSC9 – 9 lb. cylinder only
FSC30 – 30 lb. cylinder only

Accessories:

FSC Gun – Gun only (includes tip)
FSC Hose – Hose only FSC Tip - Extra tip



ACESEAL MASTIC 181 (MAS)

UL 181 AM/BM listed, fiber reinforced, water-based duct sealant/mastic. Dries to off white color.

MAS1 – 1 gallon - 4/cs



ACE MASTIC TAPE (ADT)

Fiberglass reinforcing tape for duct seams and joints. Size 3"x150'.

ADT – 24 rolls/cs



ACE CHIP BRUSH (ADB)

Economical 3" brush for use with **ACESEAL MASTIC**.

ADB – 12/cs



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

INSULATION / SEALANTS / CAULKING

ACE FOAM SEALANT (FMA JR.)

Triple expanding polyurethane foam designed to fill holes, gaps, etc., in air conditioning and refrigeration applications. Does not contain CFC's. Non-flammable.

FMAjr – 12 oz net - 12/cs



ACE FOAM INSULATION TAPE (AIF)

Prevents condensation on cold pipes and can be used to minimize heat loss on hot pipes. Tape will not dry out or crack.

AIF2 – 30' x 2" x 1/8" roll - 12/cs



ACE CORK TAPE (ACT)

Non-hardening, non-skinning rubberized cork tape designed to bond easily to piping without any additional adhesives. Manufactured for the air conditioning industry as an insulating material for hot/cold pipes and also to prevent pipe condensation.

ACT2 – 30' x 2" x 1/8" roll - 12/cs



ACE BEAD CORDS (AB) ACE INSULATION SLUGS (ATG)

Non-hardening, ready-to-use, water-resistant compound ideal for sealing all joints, seams and openings. Product maintains shape and properties under a wide range of temperatures and conditions. Excellent for heated and cooled boxes.

AB – 3/8" x 25 bead cords - 24/cs
ATG – 2 lb. slugs - 12/cs



ACE FIRE SEAL 136 (FSL)

Single component non-combustible material for use in single-family residential homes. Meets ASTM-E136 and ASTM-E814 standards for residential structures. Resumes fireblock rating. Red in color.

Residential Grade
FSL136 – 10.3 oz Tube - 12/cs



ACE FIRESTOP 814 (FST)

One part, intumescent latex based sealant meeting ASTM-E814 / UL 1479 standards for commercial fire-stopping applications. Resumes integrity of 1 and 2 hour rated floors and walls. Forms a tough, flexible seal. Red in color.

Commercial Grade
FST814 – 10.3 oz Tube - 12/cs



ODOR CONTROL PRODUCTS

ACE FRESH-AIRE (AFA/FAA)

Fast-acting liquid containing a malodor counteractant to chemically neutralize unpleasant odors commonly associated with HVAC systems. Contains a "lavender" fragrance formulated to leave the HVAC system with a pleasant fresh scent after the cleaning procedure. Available in both pump and aerosol.

AFA32 – 32 oz. - 12/cs (Pump)
AFA1 – 1 gallon - 4/cs
FAA – 18 oz. net - 12/case (Aerosol)



ACE BEAD BAG BUCKETS (BBA)

Range of subtle, non-toxic fragrances supplied as plastic pellets in a convenient packet which can be easily attached to air conditioning filters to provide fresh scented air throughout offices or home environments. Available in 3 scents.

BBA300 – Orchard Spice
24/bucket - 1 bucket/cs
BBA301 – Potpourri
24/bucket - 1 bucket/cs
BBA302 – Fresh n Clean
24/bucket - 1 bucket/cs



ACE ODOR NEUTRALIZER (ON and ON-JR.)

A powerful odor absorbent which quickly eliminates odors of many different types by an ionization process. To use, simply open can and leave in area to be treated. Size ON as needed, smaller 1-3 ton units or small areas will use ONjr. (pint size), larger units and areas use ON (quart size). Not an odor cover-up, but does contain a pleasant wintergreen scent. Common uses include musty / stale air, animal odors, water / fire damage odors, smoke odors and many more. Can be inserted into HVAC air stream or used in a stand alone application. Effective up to 10 weeks.

ONjr – pint - 12/cs ON8 – gallon - 4/cs
ON1 – quart - 12/cs



ACE TECH TIP

ACE Odor Neutralizer (ON, ON-Jr.) is very effective in eliminating mild and mildew odors typically found in damp unused rooms and basements. The product has even been used successfully in fire restoration applications. The active ingredients are extremely safe and are used in food manufacturing applications. To avoid over-concentration in small, confined areas, either pour a small amount into a small metal dish or punch holes in the can lid. *(Do not put in the drain pan.)*



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

LEAK DETECTION / SMOKE BOMBS / ROOF REPAIR

Leak Detection

ACE FAST FIND LEAK DETECTOR (FFD)

Polymer-based formulation, supplied in a spray bottle for ease of use. Locates even microscopic air/gas leaks.

FFD32 – 32 oz. - 12/cs
FFD1 – 1 gallon - 4/cs



ACE FAST FIND LT LEAK DETECTOR (FLT)

Low temperature, polymer-based leak detector formulation suitable for use in temperatures down to -10°F.

FLT32 – 32 oz. - 12/cs
FLT1 – 1 gallon - 4/cs



ACE GAS LEAK DETECTOR (LD)

Bubble forming liquid with an iridescent hue for improved visibility. This high viscosity formulation provides positive leak detection for refrigeration, air and gas lines.

LD8 – 8 oz. - 24/cs
LD1 – 1 gallon - 4/cs



Roof Repair

ACE ROOF SEAL MASTIC (RSM)

Premium solvent based roof cement is ideal for use on wet or dry surfaces to seal leaks, cracks, seams, etc., around roof top air-conditioning units, vent pipes, chimneys, skylights, etc. Also excellent for repairing leaks and cracks in all roofing materials.

RSM – 1 gallon can - 6/cs

Note: This product cannot ship FedEx or UPS.



ACE ROOFSEAL (RSA)

Seals leaks, cracks, seams, etc., around rooftop air conditioning units, vents, chimneys, skylights, etc. Can also repair cracks and holes, etc., in most roofing materials. Sprays as a liquid and dries to a thick black rubberized coating. Coverage rate is 10 to 12 square feet depending on thickness.

RSA – 14 oz. net wt. - 12/cs



ACE SMOKE BOMBS (ASB)

Non-explosive smoke bombs for testing heat exchangers and ductwork airflow. Part# ASB30 yields 30 seconds / 4000 cubic feet of smoke; Part# ASB60 yields 60 seconds / 8000 cubic feet. Smoke is white/gray in color.

ASB30 – 30 second - 12/bag
ASB60 – 60 second - 12/bag




DEGREASING SOLVENTS / OIL ABSORBENTS

ACE ENVIRO-KLEAN DEGREASING SOLVENT (NCD)

“Environmentally friendly”, non-chlorinated degreasing solvent that is ideal to remove oil, grease, etc., from air conditioning and refrigeration parts and accessories.

NCD1 – 1 gallon - 6/cs
NCD5 – 5 gallon
NCD55 – 55 gallon



ACE SUPER DEGREASING SOLVENT (SDS)

A selected blend of solvents that effectively removes oil, grease, etc., from air conditioning and refrigeration parts and accessories. Will not attack electrical insulation and is non-corrosive.

SDS1 – 1 gallon - 6/cs
SDS5 – 5 gallon
SDS55 – 55 gallon



ACE SUPERKLEAN (SKL)

High performance, concentrated alkaline general purpose cleaner and degreaser quickly and easily removes heavy concentrations of grease, dirt, grime, waxes etc., from appliances, grease filters, motors, engines, etc.

SKL32 – 32 oz. - 12/cs
SKL1 – 1 gallon - 4/cs
SKL25 – 2.5 gallon - 2/cs
SKL5 – 5 gallon
SKL55 – 55 gallon



ACE OIL ABSORBENT PADS (WFMF100)

Polypropylene fiber absorbent pads pick up all types of industrial oils while not absorbing water. Size 17” x 19”.

WFMF100 – 100/pkg



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

Ace

HAND CLEANING PRODUCTS

ACE TECH TIP

ACE can answer your questions about “cross reference to competitor product” information. Simply contact us with the competitor part number or product name and we can supply an equivalent product or one of better quality usually at a better price.

ACE HANDI-WIPES (ASW)

Multi-purpose, non-scratching, waterless towels cut through tar, oil, grease, ink, paint, etc. Fortified with emollient and natural oils to protect hands. Ideal for cleaning hands, tools, equipment, etc.

ASW20 – 20/roll - 12/cs

ASW70 – 70/roll - 6/cs



PVC CEMENT / INSULATION ADHESIVES

ACE WET/DRY PVC CEMENT (WPVC)

Extremely fast drying, blue, medium bodied PVC cement recommended for wet and/or quick pressurization conditions. Suitable for joining PVC pipe and fittings for all class and schedule pipe up to 6” circumference; schedule 60 up to 4”.

WPVC8 – 8 oz. - 24/cs

WPVC16 – 16 oz. - 12/cs



ACE PVC CEMENT (PVC)

Dauber-in-cap, regular bodied medium-to-fast setting PVC cement for PVC pipes and fittings. Suitable for use for schedule 40 and 80 pipes up to 4” in diameter.

PVC8 – 8 oz. - 24/cs

PVC16 – 16 oz. - 12/cs



ACE PVC PRIMER / CLEANER (PVCP)

Clear, dauber-in-cap formula cleans, primes and softens pipe and fittings prior to application of solvent for secure bonding of surfaces. Purple in color.

PVCP8 – 8 oz. - 24/cs

PVCP16 – 16 oz. - 12/cs



ACE INSULATION ADHESIVE (INA)

A high-strength, opaque-colored, contact cement suitable for use in bonding pipe insulation tubes/sheets and most other clean, dry surfaces. Dries flexibly to form a positive vapor barrier to prevent pipe sweat and heat transfer.

INA8 – 8 oz. - 24/case

INA16 – 16 oz. - 12/case

INA32 – 32 oz. - 12/case



THREADED PIPE PRODUCTS

ACE ALL-PURPOSE PIPE DOPE (APD)

Brush-in-can, yellow, non-hardening, non-toxic pipe joint compound for use on all metals, ABS, PVC, CPVC, etc. Does not contain lead or silicone. NSF certified formula.

APD8 – 8 oz. - 24/cs

APD16 – 16 oz. - 12/cs



ACE PIPE SEAL (TPD)

Teflon-based, brush-in-can, non-hardening, white pipe compound for use on metal and plastic threaded connections. Does not contain lead or silicone. NSF certified formula.

TPD8 – 8 oz. - 24/cs

TPD16 – 16 oz. - 12/cs



ACE TEFLON TAPE (ATT)

White teflon tape ensures tight fits for threaded connections.

ATT – 100 rolls/cs



ACE LIGHT CUTTING OIL (LTO)

Heavy-duty sulfurized-chlorinated base oil that helps cut clean, sharp threads on steel and brass pipe. Reduces friction during hand threading applications. By reducing this friction, heat generation is minimized. The results are cleaner, sharper threads, better fitting joints and longer tool life.

LTO32 – 32 oz. - 12/cs



ACE DARK CUTTING OIL (DTO)

Heavy-duty sulfurized-chlorinated base oil that helps cut clean, sharp threads on steel and brass pipe. Reduces friction during the high-speed machining process. By reducing this friction, heat generation is minimized. The results are cleaner, sharper threads, better fitting joints and longer tool life.

DTO32 – 32 oz. - 12/cs



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

 Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

REFRIGERATION OIL PRODUCTS

Mineral Oils

BVA REFRIGERATION OIL (NAPHTHENIC)

Manufactured and refined by the Calumet Refining Company, **BVA** refrigeration oils are OEM approved and used by major compressor manufacturers. The oils offer excellent chemical stability when in the presence of refrigerant and other compressor materials. The oils also have good thermal stability to ensure good performance at high temperatures and have good low temperature properties to prevent congealing in the evaporator. The oils are also wax-free to prevent floc problems in the evaporator and expansion valve.

	Quart 12/cs	Gallon 6/cs	5 Gallon	55 Gallon
BVA 3 150 SUS	BVA3 - 32	BVA3 - 1	BVA3 - 5	BVA3 - 55
BVA 4 300 SUS	BVA4 - 32	BVA4 - 1	BVA4 - 5	BVA4 - 55
BVA 5 500 SUS	BVA5 - 32	BVA5 - 1	BVA5 - 5	BVA5 - 55

OEM Compressor Approvals: Copeland, Prestcold, Dunham Bush, Tecumseh, Trane, Carlyle, Schnacke-Grasso.

Alkyl Benzene Oils

BVA, AB OILS (BVA, AB)

A wax-free, alkylated benzene-based lubricant, that does not contain paraffin chains that cause floc properties. **BVA** Alkyl Series has excellent miscibility with R-22. The **BVA** Alkyl Series is miscible with some of the new interim refrigerants such as MP-39, MP-52, MP-66, HP-80 and HP-81. It also makes retrofitting easier and more effective. **BVA** Alkyl Series oil offers excellent thermal stability and chemical stability. Due to its compatibility with mineral oil it can be used in its place or added to mineral oil.

		Gallon 4/cs	5 Gallon	55 Gallon
BVA 100E	500 SUS	BVA100E - 1	BVA100E - 5	BVA100E - 55
BVA 150	150 SUS	BVA150E - 1	BVA150E - 5	BVA150E - 55
BVA 200CA	200 SUS	BVA200CA - 1	BVA200CA - 5	BVA200CA - 55
BVA 300	300 SUS	BVA300 - 1	BVA300 - 5	BVA300 - 55

OEM Compressor Approvals: Copeland (200 ca), Danfoss, Tecumseh, Carrier / Carlyle, Bristol, and others.



Polyol Ester Oils

SOLEST LUBRICANTS

Solest® Oils offer excellent miscibility with HFC refrigerants and have excellent chemical and thermal stability as well as superior lubricity characteristics on steel and aluminum.



	Quart 12/cs	Gallon 6/cs	5 Gallon	55 Gallon
Solest 22 100 SUS	-	Solest 22-1	Solest 22-5	Solest 22-55
SolestLT32 150 SUS	SolestLT32-32	SolestLT32-1	SolestLT32-5	SolestLT32-55
Solest 35 160 SUS	Solest 35-32	Solest 35-1	Solest 35-5	Solest 35-55
Solest 46 200 SUS	Solest 46-32	Solest 46-1	Solest 46-5	Solest 46-55
Solest 68 330 SUS	Solest 68-32	Solest 68-1	Solest 68-5	Solest 68-55
Solest 120 600 SUS	Solest 120-32	Solest 120-1	Solest 120-5	Solest 120-55
Solest 150 750 SUS	-	Solest 150-1	Solest 150-5	Solest 150-55
Solest 170 800 SUS	-	Solest 170-1	Solest 170-5	Solest 170-55
Solest 220 1100 SUS	-	Solest 220-1	Solest 220-5	Solest 220-55

OEM Compressor Approvals: A variety of Compressor manufacturers, including Copeland, Tecumseh, McQuay, Carrier / Carlyle, Bristol, Bitzer, others.

Additional Oil Products

BVA VACUUM PUMP OIL (VPO)

High quality lubricant that provides a multi-viscosity oil capable of performing at the deepest vacuum. Regular use will insure continued good operating efficiency of treated pumps. Quart size bottle shipped with easy-pour spout.

VAC235-32 – 32 oz. - 12/cs **VAC235-1** – 1 gallon - 6/cs



RUSTBUSTER (RBSTR)

Oil used to loosen rust from screws, nuts, shafts and frozen parts.

RBSTR – 4 oz. - 12/cs



TELESPOUT OILER (TSO)

All-purpose lubricating oil that comes with a handy telespout oiler.

TSO – 4 oz. - 12/cs



REFRACTOMETER

Precision instrument used to determine the refractive index and relative boiling/freezing points of glycol/water solutions. Also used to determine the relative mix of refrigeration oils in a system when converting systems to new refrigerant oils.

O2940-09 – Oil Refractometer

TKE81000-00 – Glycol Refractometer



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

 Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

Ace

HOSES, WATER NOZZLES, SPRAYERS

Hoses

Z-75850 and Z-75875

Top of the line high performance five ply construction all-weather rubber / vinyl water hoses with added durability and flexibility for extra heavy-duty use.

Z75850 – standard 5 ply - 50 foot
Z75875 – standard 5 ply - 75 foot



HW 5850

Extra heavy-duty hot water rubber hose capable of extended hot water (200°F) use.

HW5850 – 50 foot hot water hose



Water Nozzles

571TFR NOZZLE

Heavy-duty hose nozzle, suitable for hot water use. Insulated comfort-grip rubber handle on steel and brass body with washer.

Sold individually



573 NOZZLE

Zinc plated steel and brass construction hose nozzle with washer.

Sold individually



474 NOZZLE

Plastic and brass leak-proof, shatter-proof, hose nozzle with washer.

Sold individually



01RW HOSE WASHERS

High quality rubber hose washers.

10 washers/pk



Sprayers

ACE COIL CLEANING GUN (CSG)

For use with ACE Coil Cleaners to produce a powerful, high foaming cleaning spray. Simply attach the gun to a water hose and add ACE Coil Cleaner to the chemical reservoir. Then select the chemical ratio required before applying to the coil to be treated. Saves time, no mixing required.

CSG – Sold individually



ACE 250P COIL CLEANING SPRAYER (250P)

A high quality, 2 liter heavy-duty polypropylene sprayer with a 1.5 liter working capacity.

250P – Sold individually

ACE 1000P COIL CLEANING SPRAYER (1000P)

Heavy-duty 1 gallon acid resistant polypropylene sprayer.

1000P – Sold individually

ACE 2000P COIL CLEANING SPRAYER (2000P)

The popular heavy-duty 2 gallon acid resistant polypropylene sprayer with a full 1.5 gallon working capacity.

2000P – Sold individually

ACE 3000P COIL CLEANING SPRAYER (3000P)

A large tank capacity of 3.0 gallon acid resistant polypropylene sprayer.

3000P – Sold individually

ACE HS 1 SPRAYER (HS)

Commercial 1 quart capacity hand sprayer suitable for most applications.

HS – 12/cs

Note: Replacement parts and part kits are available for 1000, 2000, 3000, 250P and CSG sprayers.



HEAT TRANSFER & ANTI-FREEZE PRODUCTS

FROSTSAFE / PIPESAFE

An inhibited glycol-based anti-freeze suitable for protection of closed systems against severe weather conditions. Available in ethylene or propylene glycol. Glycol products are available with or without inhibitors subject to customer requests.



FULL STRENGTH GLYCOL PRODUCTS

Frostsafe (Ethylene Glycol)

EG5 – 5 gallon
EG55 – 55 gallon

Pipesafe (Propylene Glycol)

PG5 – 5 gallon
PG55 – 55 gallon

Pipesafe Plus (Propylene Glycol Food Grade)

PG55FG – 55 gallon

PG Food Grade, 55 gallon only: (Must be used in applications where product may come in contact with food.)

All ACE glycols are 100% virgin material - no recycled material is used.

Freeze Protection Point	% Ethylene Glycol Needed	% PG or PG Food Grade Needed
+20	16%	20%
+10	26%	29%
0	34%	37%
-10	40%	43%
-20	45%	48%
-30	49%	52%
-40	53%	56%
-50	56%	58%
-60	60%	60%

FROSTGUARD / PIPEGUARD

An inhibited 60% glycol-based anti-freeze which provides burst protection to -100° Fahrenheit. Available in ethylene or propylene glycol.



Frostguard (Ethylene Glycol)

EG60-1 – 1 gallon - 4/cs
EG60-5 – 5 gallon
EG60-55 – 55 gallon

Pipeguard (Propylene Glycol)

PG60-1 – 1 gallon - 4/cs
PG60-5 – 5 gallon
PG60-55 – 55 gallon

PRE-DILUTED GLYCOL PRODUCTS

Freezing Point EG60 Frostguard		Freezing Point PG60 Pipeguard	
Freeze Protection Point	% EG60 Needed	Freeze Protection Point	% PG60 Needed
+20	28%	+20	33%
+10	43%	+10	48%
0	56%	0	60%
-10	66%	-10	71%
-20	76%	-20	80%
-30	83%	-30	86%
-40	90%	-40	88%
-50	93%	-50	95%
-60	100%	-60	100%

COOLING TOWER PRODUCTS

Scale Removers

ACE SCALE REMOVER (SR)

Easy-to-use inhibited acid-based scale remover safe for use on galvanizing, copper, iron and aluminum in heat exchangers, cooling towers, air conditioning equipment, etc. Product will mechanically remove any sludge or algae attached to the scale growth. Use 1 gallon to 15 gallons water for heavy scale, 1 to 20 for medium to light scale. Descaling in a typical system cleaned will take roughly 4-5 hours before draining and refilling. To inhibit future scale build up, use ACE NCT corrosion inhibitor. Comes with pH test strips packet for use when neutralizing.

SR1 – 1 gallon - 4/cs
SR5 – 5 gallon
SR55 – 55 gallon



ACE SILICA SCALE REMOVER ADDITIVE (SSA)

For extra-hard-to-remove silica scale, add to the SR solution in the above cleaning procedure. Add 1 pound of powder to each gallon of SR required for system cleaning. If unsure of scale type, ACE can analyze a sample of hardened scale sent to the factory. Call for details.

SSA – 10 lb box - sold individually



ACE CONDENSER CLEANER (CC-10)

Original acid detergent powder is inhibited against chemical attack on iron, galvanizing, brass and copper, etc. Removes scale, rust, sludge and algae. 10 lbs. of CC-10 treats 50 gallons of water.

CC10-40 – 10 lb. box - 4/cs
CC10-50 – 50 lb. box
CC10-100 – 100 lb. box



ACE SCALEMASTER (LSR)

Organic salt-based limescale remover with newly developed Acid Replacement Technology produces a safer-than-acid, fast-acting limescale (calcium carbonate) remover. Contains an inhibitor to prevent attack on aluminum, galvanizing, copper or iron. 1 gallon treats 20 gallons of water.

LSR1 – 1 gallon - 4/cs
LSR5 – 5 gallon
LSR55 – 55 gallon



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

 Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

Ace

COOLING TOWER PRODUCTS

Scale & Corrosion Inhibitors

ACE NON-CHROMATE CONDENSER TREATMENT (NCT)

Controls scale and corrosion in condenser water systems. Controls head pressure and keep the system clean for up to 30 days. The easy to use automatic feeder can is placed into service by opening the pre-marked holes on the side and top of the can (do not remove lid) and inserting the can into the sump of the cooling tower.

NCT15 – for up to 30 ton systems,
2.5 lb. can - 12/cs

NCT100 – for up to 125 ton systems,
10 lb. can - 6/cs



ACE COOLING TOWER TREATMENT 403M (CL-403M)

Concentrated non-chromate, combination of polyelectrolytes and corrosion inhibitors formulated to control scale, rust and sludge build-up even in the most severe conditions. For systems over 100 tons capacity.

CL403M-5 – 5 gallon

CL403M-30 – 30 gallon

CL403M-55 – 55 gallon



ACE COOLING TOWER TREATMENT 134 (CL-134)

Phosphate-based liquid cooling water treatment with an anti-precipitant, dispersant and corrosion inhibitor to control scale, corrosion and sludge build-up. For systems over 100 tons capacity.

CL134-5 – 5 gallon

CL134-30 – 30 gallon

CL134-55 – 55 gallon



Acid Pump

ACE ACID PUMP (AAP)

A small submersible pump for transferring hydrochloric or sulfamic acids through water-cooled condensers, heat exchangers and other water handling equipment. Maximum flow rate of 475 GPH at 1' lift with a 1/28 HP epoxy encapsulated motor.

AAP – Sold individually



ACE ACID PUMP KIT (APK)

20-feet of clear plastic hose and fittings for use with the ACE Acid Pump (AAP).

APK – Sold individually



Algaecides

ACE TOWER TREAT TABLETS (TWR-25)

EPA registered, 40% active 2,2-dibromo-3 nitrilopropionamide (DBNPA) tablets for use in small water cooling towers to control bacterial/algal growth. Supplied in a water-soluble bag, each tablet will treat 500-1000 gallons of water and takes about three weeks to dissolve, subject to water flow.

TWR25 – 25 tablets/pail



ACE LIQUID ALGAECIDE 2151 (CL-2151)

Unique biocide that effectively controls algae, slime and bacterial growth in cooling towers, chill water and spray humidifying systems. Will not cause odor, foam or other use problems. EPA registered. **CL2151** should be dosed at a rate of 10-25 fluid ounces per 1000 gallons per month depending on algae growth tendencies, with the larger dose used for the initial shock treatment of severe algae growth.

CL2151-1 – 1 gallon - 4/cs

CL2151-5 – 5 gallon

CL2151-30 – 30 gallon

CL2151-55 – 55 gallon



Closed Loop Cleaners & Treatments

ACE CLOSED SYSTEM CLEANER (CSC)

Non-acid cleaner suitable for use in hot and chilled water systems to remove sludge and accumulations of rust and corrosion. Use at a rate of 1 gallon to 200 gallons water and allowed to circulate for up to 10 days before draining. After the system has been cleaned, it is recommended that **ACE Closed System Treatment (CST)** be used to prevent future build-up of corrosion and rust.

CSC1 – 1 gallon - 4/cs

CSC5 – 5 gallon

Also for hot water boilers.



ACE CLOSED SYSTEM TREATMENT (CST)

Non-chromate liquid controls rust and corrosion in hot and chilled water systems and hot water boilers. Compatible with anti-freeze solutions and is authorized for use in federally inspected meat and poultry plants by the USDA. Use at a ratio of 1 gallon to 120 gallons water. Product remains in the system.

CST1 – 1 gallon - 4/cs

CST5 – 5 gallon



ACE TECH TIP

To size closed loop systems, estimate approximately 6 gallons of water per ton of system capacity.



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

 Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

COOLING TOWER PRODUCTS

Additives

ACE ANTI-FOAM (AF)

Reduces foam in applications where scale removers react with heavy scale and condenser water.

AF160 – 16 oz. bottle - 12/cs

AF100 – 1 gallon - 4/cs



ACE TECH TIP

COOLING TOWERS:

To quickly calculate the amount of water in a cooling tower system, simply measure the length, width and depth in feet of the water in the tower, then multiply by 10. This gives an approximate total of gallons in the system including piping and condensers.

COOLING TOWER MANAGEMENT EQUIPMENT

BY-PASS FEEDER

2 & 5 gallon unit pot feeders, available with or without legs, for use to introduce chemical treatments into closed circulating systems.

EQJ2HD – 2 gallon

EQJ5HD – 5 gallon



pH CONDUCTIVITY METER

Combination test meter with determination of pH from 2-12 and conductivity from 0-5000 microhms.

PHMETER



CHEMICAL FEED PUMP

UL Listed, with manual control for adjustable stroke rate and stroke length. Distinct models available with variable GPD & PSI capacities.

PLE14SA



CHEMICAL SOLUTION TANK

50 gallon polyethylene solution tank ideal for storage of most corrosive/non-corrosive chemical water treatment products.

EQH26350



COOLING TOWER CONTROLLERS

MCT Controllers offer ability to control conductivity in open loop (tower) and closed loop (chiller) systems. Optional features include pH, make-up water, biocide and ORP control, program timers, drum level inputs and alarm output etc.

MCT



DROP TEST KIT

Combination test kit for water analysis of cooling or boiler water.

TK49318



ACE TECH TIP

In addition to water treatment chemicals and equipment, **Atlantic Chemical & Equipment** offers customers a water treatment analysis service.

To take advantage of this service, customers should simply forward a quart (32 fl. oz.) sample of the cooling tower or boiler's make-up water to our Atlanta factory. Our in-house laboratory staff will analyze the sample and then recommend the appropriate treatment.

ACE can supply a wide variety of equipment to treat most water treatment needs. Call for specific equipment needs. Many configurations are available.

For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

 Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

Ace

STEAM BOILER TREATMENTS

ACE STEAM-RITE (STR)

Concentrated phosphate-based powdered boiler cleaner and conditioner that contains a color indicator to insure proper use. Stops surging/priming. Eliminates scale and prevents corrosion. No draining necessary.

STR – 9 oz. net. - 12/cs



ACE LIQUID BOILER CLEANER (LBC)

A corrosion-inhibited formula blended to prevent clogging of automatic hot water valves while removing sludge and other impurities. Will stop surging within 10 minutes. No need to drain boiler. Dosage rate of 1 quart per 35,000 BTU's boiler capacity.

LBC – 32 oz. - 12/cs



ACE STEAM-RITE PLUS (SRP)

Highly concentrated phosphate-based formula designed to clean and condition water in steam boilers. Ideal for removing oil and grease from new boilers. Eliminates surging/priming. Removes scale and prevents slow steaming.

SRP – 9 oz. net. - 12/cs



ACE BOILER TREATMENT 160 (BL-160)

A highly alkaline organic formulation with sludge conditioners and oxygen scavengers for use where an all-purpose liquid boiler treatment is required. When used as directed, BL-150 Steam Line Treatment is the only other product needed to maintain the system in good working order.

BL160-5 – 5 gallon
BL160-30 – 30 gallon
BL160-55 – 55 gallon



ACE BOILER TREATMENT (BL-150)

A neutralizing amine formulation designed to prevent corrosion in steam and return lines due to acidic conditions. Recommended for use in systems where condensate return exceeds 75%.

BL150-5 – 5 gallon
BL150-30 – 30 gallon
BL150-55 – 55 gallon



ACE BOILER TREATMENT 504S (BL-504S)

An organic polyelectrolyte plus an anti-precipitant for controlling scale, sludge and corrosion in steam boilers. This product provides effective and economical control of waterside problems in low and medium pressure boilers and will remove scale already formed on boiler tubes while forming a protective film against further corrosion.

BL504S-5 – 5 gallon
BL504S-30 – 30 gallon
BL504S-55 – 55 gallon



HOT WATER / STEAM BOILER TREATMENTS

ACE BOILER TREAT (ABT)

Unique, highly concentrated blend of anionic polyacrylamides and sequestrants in an alkaline solution manufactured to solubilize hardness, eliminate oxygen while also forming a thin protective film on boiler tubes. Removes previously formed scale build-up without the need of costly shutdowns. Dosage rate 1 gallon per 1000 gallons of water.

ABT32 – 32 oz. - 12/cs



ACE BOILER STOP LEAK (BSL)

An easy-to-use liquid-based product designed to repair cracks or leaks in steam or hot water boilers. No draining necessary. Dosage rate 1 quart per 12 gallons of water.

BSL32 – 32 oz. - 12/cs



ACE ONE-SHOT (AOS)

Easy-to-use single drum formulation blended from phosphates, alkaline materials, sludge conditioners and oxygen scavengers for use in steam and hot water boilers. Dosage rate 1 gallon per 1000 gallons of water.

AOS32 – 32 oz. - 12/cs
AOS1 – 1 gallon - 4/cs



ACE HYDRO-BOIL (HYB)

Powdered sodium phosphate-based hot water coil cleaner to remove insulating oxide films and other clinging deposits from the outside of tankless and side arm heater coils. Can remain in the boiler to inhibit scale and corrosion.

HYB – 1# container - 12/cs



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

FUEL OIL PRODUCTS

Multi-Purpose Additives

ACE 4-SEASONS CONCENTRATE (FOS)

Solvent-based fuel oil treatment for use with all types of oil heating systems to disperse water, maintain nozzles and filters in a clean condition while also improving burner durability. Dosage rate 16 ounces per 125 gallons of oil.

FOS16 – 16 oz. 12/cs



ACE FUEL OIL ADDITIVE (FOA)

Petroleum-based emulsifying agent formulated to eliminate sludge accumulations and water build-up due to condensation in storage tanks. Dosage rate 2 quarts per 1000 gallons of oil.

FOA32 – 32 oz. - 12/cs

FOA1 – 1 gallon - 4/cs



Sludge / Algae Treatments

ACE SLUDGE-TREAT (SLT)

Solvent-based sludge and fuel oil conditioner for use with any type of oil for rotary and gun burners. Dosage rate 1 quart per 1000 gallons of oil.

SLT32 – 32 oz. - 12/cs

SLT1 – 1 gallon - 4/cs



ACE FUEL OIL BIOCIDES (FOB)

EPA registered oil-soluble preservative for the control of bacteria and fungi that cause the degeneration of crude oil and refined oils during storage. Dosage rate 24 ounces per 1000 gallons of oil.

FOB16 – 16 oz. - 12/cs

FOB32 – 32 oz. - 12/cs



Adhesives / Cements

ACE DURA-BOND (DUB)

Smooth, easy-to-use, sodium silicate, water-glass formulation designed for use as a high temperature refractory adhesive. Used for gluing liners in fire chambers.

DUB16 – 16 oz. - 12/cs



ACE FURNACE CEMENT (FRC)

Fire resistant 3000°F furnace/retort cement that is acid-proof and fire-resistant. Used for repairing furnaces, boilers, stoves, chimneys and heaters. 6 lb. bucket.

FRC6 – 6 buckets/cs



Odor Products

ACE FUEL ODOR AWAY (AFO)

Ready-to-use powder, supplied in a shaker-canister. Absorbs oil spills and eliminates oil odors from concrete and other hard surfaces.

AFO1 – 1 lb. canister - 12/cs

AFO2 – 2 lb. canister - 12/cs



ACE FUEL OIL NEUTRALIZER (FON)

Sprinkle-on granular odor neutralizer absorbs oil while eliminating oil odors from hard surfaces.

FON – 1.75 lb. canister - 12/cs



ACE ODOR OUT (AOD)

A heavy-duty, aerosolized odor neutralizer that quickly removes unpleasant odors associated with fuel oils, etc.

AOD – 12 oz. net - 12/cs



Soot Removal

ACE SOOT-X (ASX)

Powdered soot remover for all oil and gas-fired burners. Formulated to produce extra oxygen that causes soot to burn until the furnace is clean.

ASX – 1 lb. canister - 12/cs



ACE SOOT GONE (SRS)

Fast-acting, aerosolized formula safely and effectively removes soot from fuel oil, gas, coal and wood burning heating units.

SRS – 12 oz. net - 12/cs



ACE SURE SHOT (SST)

Ready-to-use soot remover for oil, gas, wood, coal-fired boilers, stoves, etc., 3 oz. tubes.

SST – 36 tubes/cs



Water / Ice Dispersants

ACE HYDRO-SORB (AHS)

Solvent-based fuel tank water absorber will absorb and permanently disperse water in fuel oil storage tanks. Dosage rate 1 quart per 250 gallons of oil.

AHS16 – 16 oz. - 12/cs

AHS32 – 32 oz. - 12/cs



ACE ICE-AWAY (IAW)

Concentrated, solvent-based fuel oil de-icer rapidly eliminates ice build-up in fuel oil storage tanks. Not for use in internal combustion engines. Use one 16 ounce bottle of per 1000 gallons of oil.

IAW16 – 16 oz. - 12/cs

IAW32 – 32 oz. - 12/cs



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

Ace

ICE MACHINE TREATMENT PRODUCTS

Cleaners

ACE NICKEL-SAFE ICE MACHINE CLEANER (NSC)

Removes scale in ice machines with nickel-plated evaporators. One 16 oz. bottle will clean a system with up to 3 gallons of sump water. USDA authorized.

*NSC16 – 16 oz. - 12/cs
NSC1 – 1 gallon - 4/cs

(*16 oz. cs is not DOT hazardous)



ACE LIQUID ICE MACHINE CLEANER (LIM)

Food grade all-purpose scale dissolver for fast removal of lime and scale deposits in ice machines, coffee urns, stainless steel, etc. One 16 ounce bottle will clean a system with up to 3 gallons of sump water.

LIM16 – 16 oz. - 12/cs
LIM1 – 1 gallon - 4/cs



Sanitizers

ACE ICE MACHINE SANITIZER (IMS)

Concentrated formula eliminates slime growths and odors associated with hard surfaces on ice machines, ice cream dispensing machines and other food processing equipment.

IMS16 – 16 oz. - 12/cs
IMS1 – 1 gallon - 4/cs
IMS5 – 5 gallon
IMS55 – 55 gallon



WATER FILTER PRODUCTS

Everpure Replacement Cartridges

4CB5 / 7CB5

Genuine Everpure 5 Micron replacement cartridge for Standard Everpure heads. Controls chlorine, taste and odor. Maintains important NSF Class 1 Certification for Performance and Safety standards. Use for drinking water applications. Flow rate 1.67 gallons per minute.

4CB5 – 6,000 gallon capacity
14 in. long - 6/cs

7CB5 – 10,000 gallon capacity
20 in. long - 6/cs

Can replace the following Everpure cartridges:
MC, QC71, XC, CV, XCV, T0 and 7DBG.



4CB5S / 7CB5S

Genuine Everpure 5 Micron replacement cartridge for Standard Everpure heads. Controls scale in addition to chlorine, taste, and odor. Maintains important NSF Class 1 Certification for Performance and Safety standards. Use for ice machine and steamer applications. Flow rate 1.67 gallons per minute.

4CB5S – 6,000 gallon capacity
14 in. long - 6/cs

7CB5S – 10,000 gallon capacity
20 in. long - 6/cs

Can replace the following Everpure cartridges:
I-2000, I-4000, MH



Everpure Filter Heads

All filter heads include mounting brackets/screws and have built-in water shut-off valves for flushing and for easy cartridge changes. Inlet/Outlet connection size 3/8" on QL3, and 3/4" on QC71 models.

EV9259-14 QL3 SINGLE HEAD FOR EVERPURE CARTRIDGES



EV9272-22 QC71 TWIN PARALLEL HEAD FOR EVERPURE CARTRIDGES



EV9272-23 QC71 TRIPLE PARALLEL HEAD FOR EVERPURE CARTRIDGES



EV9336-11 QC71 QUAD PARALLEL HEAD FOR EVERPURE CARTRIDGES



ICE MACHINE SIZING CHART FOR EVERPURE QUICK CHANGE HEADS

	CUBER	FLAKER
Single Head	750 lb	1500 lb
Double Head	1450 lb	2200 lb
Triple/Quad	Hoshizaki and other ice machines flowing 5 GPM and up, please call for information.	



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

WATER FILTER PRODUCTS

COSTGUARD By **EVERPURE**
WATER YOU CAN TRUST.

Inline Filters

INLINE FILTER FOR TASTE/ODOR/CHLORINE/SCALE AND PARTICLE REDUCTION

10 inch and 12 inch in-line filter with NSF Class 1 Taste and Odor reduction rating. Also reduces Limescale, Capacity of .75 GPM. Ideal for small icemakers (up to 250 lbs. capacity), coffee makers, or drinking fountains. 1/4" NPT openings. Fittings not included.

10" - IN10 - 2400 gallon capacity - 10 in. long - 6/cs
12" - IN12 - 4800 gallon capacity - 12 in. long - 6/cs



Replaceable Cartridges for Filter Housings

SEDIMENT CARTRIDGES (PRE-FILTER) FOR PARTICLE REDUCTION ONLY

Coarse pre-filter cartridges for bowl type systems. Reduces dirt, rust and sediment in high volume applications. Ten micron rating. Two inch diameter. Fits all standard size 5/10/20 inch bowls.


5" - P5-478 - 12/cs
10" - EC-110 - 12/cs
20" - EC-210 - 6/cs



CARBON CARTRIDGES FOR TASTE/ODOR/CHLORINE REMOVAL

Reduces chlorine, taste, and odors. Recommended for foodservice/drinking water applications. NSF Class 1 Rating. Two inch diameter. Fits all standard size 5/10/20 inch bowls.


5" - GAC-5 - 24/cs
10" - CGT-10 - 12/cs
20" - CGT-20 - 12/cs



SCALE AND CARBON CARTRIDGES SCALE/TASTE/ODOR/CHLORINE REMOVAL (ICE MACHINE)

Combination cartridges perform the job of scale removal, as well as taste and odor reduction, making them ideal for ice machine filtration. 10/20 inch long cartridges fit all brands of 2 inch diameter, 10/20 inch long housings.

10" - CGT-10S - 12/cs
20" - CGT-20S - 6/cs

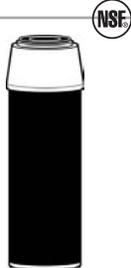

WHAT DOES NSF CERTIFICATION MEAN?

NSF (National Safety Foundation) is the agency that establishes and certifies water quality standards. NSF also tests filters and housings for burst strength and leak tests. Buying an NSF product reduces liability and insures safe products and water that is certifiably safe. Using "counterfeit" and "off brand" substitute filters voids all warranties and NSF certification benefits as well as increasing liability.

NSF Certified Everpure COSTGUARD systems and filters provide the safety your customers deserve and expect.

Filter Housings

COMPLETE FILTER SYSTEMS AVAILABLE IN MANY CONFIGURATIONS

Complete filter systems include single, double, or triple bowl systems complete with bowls, mounting brackets, pressure gauge and shut-off valves. Accepts any 10/20 inch long, 2 inch diameter filter cartridge.

CGS-10 - single 10" bowl system
CGS-12 - double 10" bowl system
CGS-20 - single 20" bowl system
CGS-22 - double 20" bowl system
CGS-23 - double 20" bowl system (parallel piping)
CGS-55 - triple 20" bowl housing

Cartridges sold separately



ACE TECH TIP

For TRILIMINATOR® Water Filter System Replacement Cartridges Use:

1 - EC-110 - 10" Pre-filter Cartridge
1 - CGT-20S - 20" Primary Cartridge

ICE MACHINE WATER FILTER SIZING GUIDE

	FILTER SYSTEM	PRE-FILTER	PRIMARY FILTER
Up to 400 lb. Cuber / 800 lb. Flaker	CGS-10	-	CGT-10S
Up to 500 lb. Cuber / 1000 lb. Flaker	CGS-12	EC-110	CGT-10S
Up to 800 lb. Cuber / 1200 lb. Flaker	CGS-20	EC-210	CGT-20S
Up to 1200 lb. Cuber / 1600 lb. Flaker	CGS-55	EC-210	(2) CGT-20S

POLYPROPYLENE HOUSINGS

Reinforced, heavy-duty polypropylene housings with relief valve. Accepts all standard size 5/10/20 inch filters. Blue color. Mounting bracket purchased separately. Fittings not included.

5" - #5 slim lines - 12/cs 3 GPM - 1/2" NPT openings
10" - #10 slim lines - 12/cs 5 GPM - 1/2" NPT openings
20" - #20 slim lines - 8/cs 5 GPM - 1/2" NPT openings

Wall mounting bracket. Fits all housings.

Part # slim - bracket

Cartridges sold separately



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

FLEET MAINTENANCE

A variety of Cleaners, Polishes and Waxes for Commercial, Industrial, Home or Automotive use.

ACE ALUM BRITE (ABC)

Ready-to-use hydrofluoric acid-based aluminum cleaner and brightener ideal for restoring aluminum and chrome/mag wheels to “like new” condition.

ABC32 – 32 oz. - 12/cs
ABC1 – 1 gallon - 4/cs



ACE NEW SHINE (NES)

Biodegradable, water-based silicone protector restores leather, rubber and vinyl surfaces to “like new” condition.

NES32 – 32 oz. - 12/cs
NES1 – 1 gallon - 4/cs



ACE CLEARVUE (CLV)

Ready-to-use, non-streaking, glass cleaner. Quickly and easily removes windscreen dirt and debris.

CLV32 – 32 oz. - 12/cs
CLV1 – 1 gallon - 4/cs



ACE SUPERKLEAN (SKL)

High performance, concentrated alkaline general purpose cleaner and degreaser quickly and easily removes heavy concentrations of grease, dirt, grime, waxes etc., from appliances, grease filters, motors, engines, etc.

SKL32 – 32 oz. - 12/cs
SKL1 – 1 gallon - 4/cs
SKL25 – 2.5 gallon - 2/cs
SKL5 – 5 gallon
SKL55 – 55 gallon



ACE CLEAN 'N SHINE (CNS)

One-step cleaner and polish formulated to clean and shine appliances, automobiles, trucks, etc. Does not require water to clean and leaves a bright sparkling protective wax finish.

CNS32 – 32 oz. - 12/cs
CNS1 – 1 gallon - 4/cs



ACE TIRE-BRITE (TRB)

Ready-to-use solvent-based tire and rubber dressing that produces a high gloss finish when applied to worn tires.

TRB32 – 32 oz. - 12/cs
TRB1 – 1 gallon - 4/cs



MISCELLANEOUS PRODUCTS

Heat Blocking Products

ACE HEAT SHIELD

Environmentally safe, biodegradable, non-toxic, non-corrosive protective barrier that retards against heat transfer through metal during soldering/welding applications.

Heat Shield Paste:
HSP16 – 16 oz. - 12/cs
HSP32 – 32 oz. - 12/cs

Heat Shield Spray Gel:
HSG32 – 32 oz. - 12/cs



ACE TECH TIP

ACE Heat Shield Paste (HSP) has better “insulating capabilities” than conventional “tube” heat block products. The product’s dense consistency allows it to stay in place on the protected area until job completion. Upon job completion, the paste can be wiped off and re-used on a future application.

ACE Heat Shield Paste (HSP) is best for valves and other irregular shaped surfaces.

ACE Heat Shield Spray Gel (HSG) is best for applying thinner coats to flatter surfaces.



For further product use instructions/information, refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.

ACE DISPLAY RACK

Rack dimensions:
51" High, 31" Wide, 18" Deep



For further product use instructions/information,
refer to the Product Data Sheets or MSDS Sheets at www.atlanticchemical.com, or call 1-800-929-2436.

 Denotes DOT hazardous product subject to UPS/FedEx shipping surcharges.



INDEX

A

Acid Aid *8*
Acid Pump *15*
Adhesive Spray *5*
Air Filter Cleaner *8*
Algaecide, Cooling Tower *15*

B

Bactericide *6*
Belt Dressing *4*
Boiler Cleaner *17*
Boiler Stop Leak *17*
Brush, Mastic *8*
Bug Repellant *5*

C

Closed System Cleaner *15*
Closed System Treatment *15*
Coil Cleaners, Aerosol *4*
Coil Cleaners, Liquid *3*
Coil Flush *8*
Coil Gun *13*
Condensate Pan Repair *5, 8*
Contact Cleaner *5*
Cooling Tower Algaecide *15*
Cooling Tower Anti-Corrosion *15*
Cooling Tower Equipment *16*
Cork Tape *9*
Cutting Oil *11*

D

Degreaser, Liquid *10*
Degreaser, Aerosol *5*
Display Rack *22*
Drain Pan Tablets *6*
Drain Pan Protectors *6*
Ductliner Adhesive *8*
Drain Pan Repair *5, 8*

E

Everpure Filters *19, 20*

F

Filter Spray *5*
Fire Seal *9*
Firestop *9*
Flush, System *8*
Foam Tape *9*
Foaming Coil Aerosols *4*
Fogger *7*
Fuel Oil Biocide *18*
Fuel Oil Odor Control *18*
Fuel Oil Treatment *18*
Furnace Cement *18*

G

Glass Cleaner *21*
Glycol, Ethylene and Propylene *14*

H

Heat Shield *21*
Hose Nozzles *13*
Hoses Cold and Hot Water *13*

I

Ice Machine Cleaner *19*
Ice Machine Sanitizer *19*
In-Line Water Filters *20*
Injection Tool *8*
Insulation Adhesive *11*

L

Leak Soap *10*
Lubricant, Aerosol *5*

M

Mastic, Duct *8*
Microbiocides *7*

O

Odor Control *9*
Oils, Telespout *12*
Oils, Refrigeration *12*
Oils, Vacuum Pump *12*

P

Pan Patch *5*
Pan Protectors *6*
Pipe Dope *11*
Pipe Insulation Cement *11*
Polyurethane Foam *9*
Power Flush Kit *8*
PVC Cement *11*
PVC Primer *11*

R

Refractometer *12*
Roof Cement *8*
Rust Barrier *4*

S


Scale Removers *14*
Scrubs, Handi *11*
Silicone Protectorant *21*
Silicone Spray *5*
Smoke Bombs *10*
Soot Stick *18*
Sprayers, Hand *13*
Sprayers, Pump Up *13*
Steam Boiler Treatment *17*
Superklean *21*

T

Teflon Tape *11*
Tire Dressing *21*

W

Wasp/Hornet Spray *5*
Water Filter Housings *20*
Wax, Spray *21*

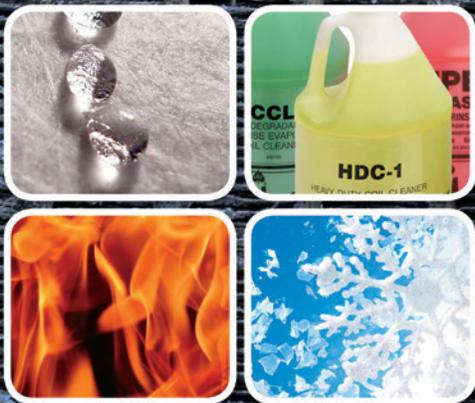

ATLANTIC CHEMICAL & EQUIPMENT COMPANY

3471 Atlanta Industrial Parkway Suite 200, Atlanta, GA 30331
800-929-2436 (phone) 404-505-6626 (fax) 404-505-9607
www.atlanticchemical.com