


Chamberlin Stainless Steel Braided All Metal Hose Assemblies

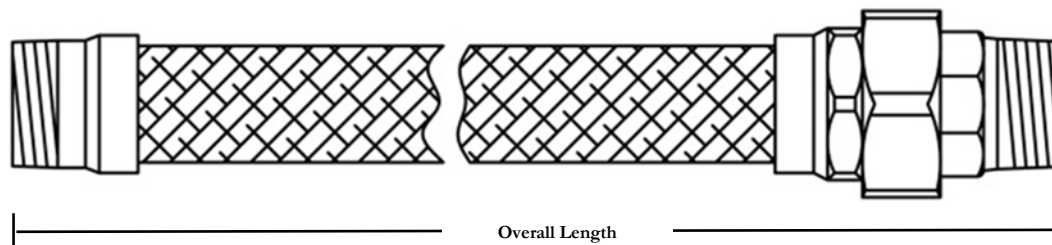


Hose Sizes:	1-1/2" to 2"
Hose Lengths:	<u>Standard:</u> 12", 18", 24", 36" <u>Custom:</u> Minimum length: 12" with 1" increments.
Inner Tube:	321L/316L Stainless Steel
Outer Braid:	304L Stainless Steel
Fittings:	Iron/Carbon Steel
Fixed End Fittings:	MNPT
Union End Fittings:	MNPT
Working Pressure:	300 psi
Burst Pressure:	1200 psi
Minimum Bend Radius:	1-1/2" - 11.75" 2" - 12.55"
Temperature Rating:	-20°F to 800°F

Hose Sizes:	2-1/2"
Hose Lengths:	<u>Standard:</u> 18", 24", 36" <u>Custom:</u> Minimum length: 18" with 1" increments.
Inner Tube:	T321L Stainless Steel
Outer Braid:	Series 300 Stainless Steel
Fittings:	Iron/Carbon Steel
Fixed End Fittings:	MNPT
Union End Fittings:	MNPT
Working Pressure:	300 psi
Burst Pressure:	1200 psi
Minimum Bend Radius:	16"
Temperature Rating:	-20°F to 800°F

Chamberlin Stainless Steel Braided All Metal Hose Assemblies - Submittal

Fixed End Connection

MNPT	X
------	---

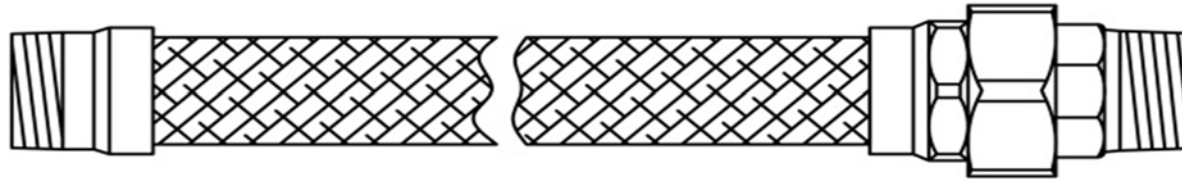

Union End Connection

MNPT	X
------	---

NOTE:

- * Drawings not to scale - Representation Only.
- * Fit within installation areas not guaranteed.
- * Hose kits assembled hand tight.

Size	Length					Custom Length	Quantity	*MFR
	12"	18"	24"	36"	48"			
1-1/2"								44
2"								78
2-1/2"								122

*MFR (Maximum Flow Recommendation) calculated @ 8 fps.

For standard configurations fill in quantity in selected size/length block.

For custom lengths fill in length and quantity blocks for corresponding hose size;

Minimum length 12" with 1" increments.

WARNING: To insure proper installation, this hose assembly must be installed according to instructions included with shipment. Instructions are also available online at www.chamberlinrubber.com.

Company: _____	Rep: _____	Approved By: _____
Project: _____	Quote #: _____	PO #: _____ Date: _____