



H-x043 Series

Pro-Pal Union Ball Drain  
Full Port Forged Brass Ball Valve  
w/ Single Union End,  
Hi-Flow Hose Drain,  
Reversible Handle  
& Adjustable Packing Glands

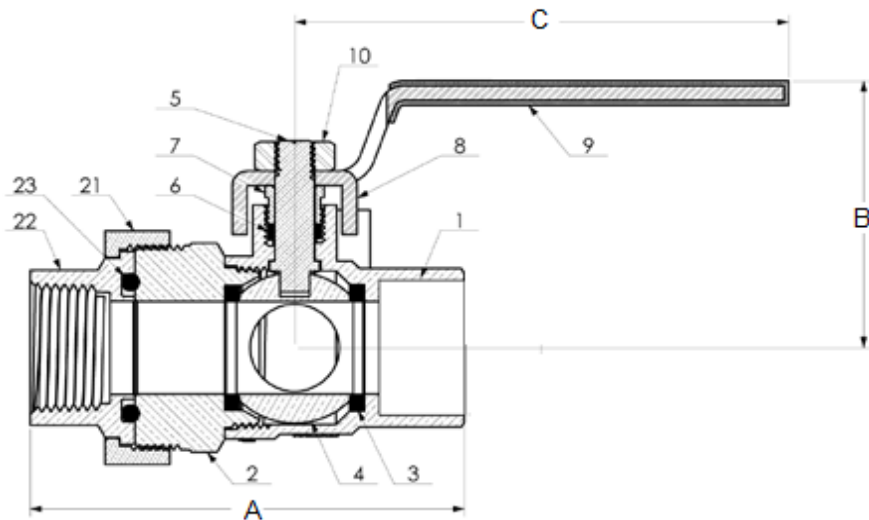

| NO. | DESCRIPTION   | MATERIAL           |
|-----|---------------|--------------------|
| 1   | BODY          | Brass              |
| 2   | CAP           | Brass              |
| 3   | SEAT          | PTFE               |
| 4   | BALL          | BRASS HCP          |
| 5   | STEM          | BRASS              |
| 6   | PACKING       | PTFE               |
| 7   | PACKING GLAND | BRASS              |
| 8   | HANDLE        | STEEL CP           |
| 9   | HANDLE JACKET | VINYL              |
| 10  | HANDLE NUT    | STAINLESS STEEL    |
| 11  | CAP           | BRASS              |
| 12  | SEAT          | PTFE               |
| 13  | BALL          | BRASS HCP          |
| 14  | STEM          | BRASS              |
| 15  | PACKING       | PTFE               |
| 16  | PACKING GLAND | BRASS              |
| 17  | HANDLE        | ALUMINUM           |
| 18  | HANDLE SCREW  | BRASS              |
| 19  | CAP & STRAP   | BRASS w/ PVC STRAP |
| 20  | GASKET        | EPDM               |
| 21  | UNION NUT     | BRASS              |
| 22  | UNION FITTING | Brass              |
| 23  | O-Ring        | EPDM               |

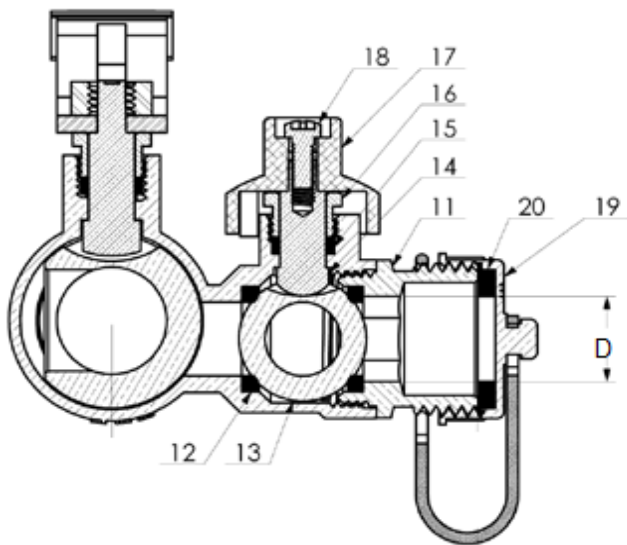

Designed for residential, commercial or industrial use. This approved Webstone valve is actuated by a blowout proof stem. Threaded ends comply with ANSI B1.20.1

| ITEM#   | Connection Type | SIZE (in) | Pressure Rating | Max Temp  | A    | B    | C    | D    |
|---------|-----------------|-----------|-----------------|-----------|------|------|------|------|
| H-40433 | FIP Union x FIP | 3/4       | 600 PSI CWP Max | 350°F Max | 3.25 | 2.06 | 4.00 | 0.50 |
| H-40434 | FIP Union x FIP | 1         | 600 PSI CWP Max | 350°F Max | 4.00 | 2.63 | 4.06 | 0.50 |
| H-40435 | FIP Union x FIP | 1 1/4     | 600 PSI CWP Max | 350°F Max | 4.31 | 3.00 | 4.31 | 0.75 |
| H-40436 | FIP Union x FIP | 1 1/2     | 600 PSI CWP Max | 350°F Max | 5.19 | 3.50 | 5.19 | 0.75 |
| H-50433 | FIP Union x SWT | 3/4       | 600 PSI CWP Max | 250°F Max | 3.50 | 2.00 | 3.63 | 0.50 |
| H-50434 | FIP Union x SWT | 1         | 600 PSI CWP Max | 250°F Max | 4.19 | 2.63 | 4.19 | 0.50 |
| H-50435 | FIP Union x SWT | 1 1/4     | 600 PSI CWP Max | 250°F Max | 4.50 | 3.00 | 4.50 | 0.75 |
| H-50436 | FIP Union x SWT | 1 1/2     | 600 PSI CWP Max | 250°F Max | 5.38 | 3.50 | 5.50 | 0.75 |