



FEATURES

- Energy Savings of up to 84%
- Lumen Maintenance over 70% @ 50,000+ Hours
- No UV/IR Radiation, No Toxic Mercury
- Steel Trim in Greystone Finish
- Die Formed of 22 Gauge Plated Steel
- Replaces 60W Incandescent
- ADA Approved

OPTICS

- Acrylic White Lens

APPLICATIONS

- Hallways
- Corridors
- Bathrooms
- Lobbies
- Outdoor Wall

CERTIFICATIONS

- UL/cUL Listed for Wet Locations
- Energy Star
- Lighting Facts

SPECIFICATIONS

Part Number: **LED7073A-70**

Limited Manufacturer Warranty: 3 Years

Kelvin Temperature (CCT): 3000K

Wattage: 9.5 W

Lumens: 768 lm

Efficacy: 80.84 lm/w

CRI: 80

Dimmable: No

Input Voltage: DC 120V

Certifications: UL Listed

DLC Listed: No

Average Hour Life: 50,000 hrs

Max. Ambient Temperature: 45°C

Min. Ambient Temperature: -20°C

Power Factor: >0.9

THD: <20%

TECHNICAL

Weight: 2.5 lbs

Length: 3-3/8"

Product Height: 9-7/8"

Product Width: 7"


LED Beam Angel: 120

LED Type: Integrated LED Array





LINE DRAWINGS

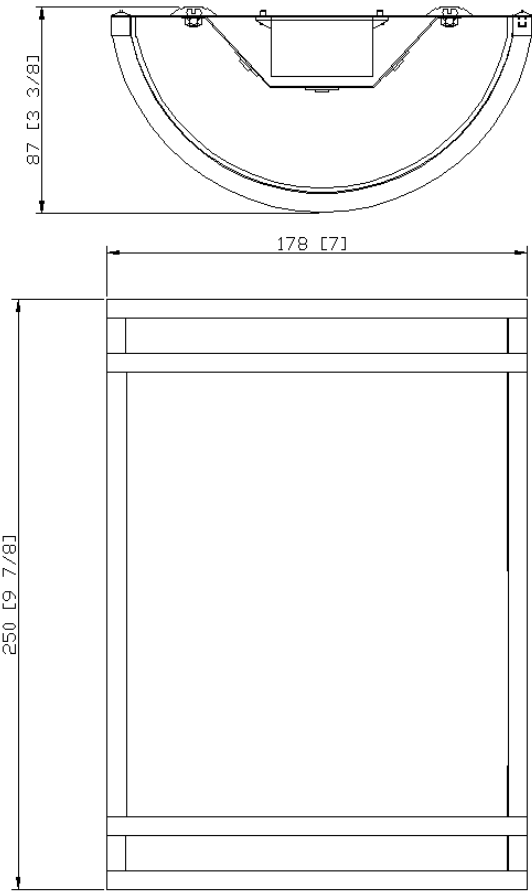

LIGHTING FACTS

LED lighting facts
A Program of the U.S. DOE

Cordelia Lighting

Light Output (Lumens)	768
Watts	9.5
Lumens per Watt (Efficacy)	80.84

Color Accuracy	81
Color Rendering Index (CRI)	

Light Color	3000 (Bright White)
Correlated Color Temperature (CCT)	

2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: ZMBK-ZDHE3R (Revised 11/30/2015)
Model Number: LED7073-X
Type: Luminaire - Decorative