

## About DiversiTech

Founded in 1971, DiversiTech Corporation is North America's largest manufacturer of equipment pads and a leading manufacturer and supplier of components and related products for the heating, ventilating, air conditioning, and refrigeration (HVAC/R) industry. Headquartered in the Atlanta, Ga. metropolitan area, DiversiTech's mission for its wholesaler partners is to simplify their work. The Company is focused on growth through internal product development, external partnerships, and acquisition. Manufacturing a suite of products, which includes a wide range of mechanical, electrical, chemical, and structural parts for HVAC/R systems, DiversiTech brings unparalleled scaling capabilities and supplier expertise. The Company holds numerous patents and operates an advanced R & D materials division dedicated to bringing more value to its customers. The Company maintains over 1 million square feet of manufacturing and distribution space in key U.S., Canadian and European locations. DiversiTech has enjoyed a continued history of successful growth and has acquired industry recognized brand names including hilmor<sup>®</sup>, Imperial<sup>®</sup>, Quick-Sling<sup>®</sup>, UltraLite<sup>®</sup>, Spin<sup>®</sup> Tools, SpeedClean<sup>®</sup> and Fresh-Aire UV<sup>®</sup>.

# POOL PRODUCTS

3039 Premiere Parkway  
Suite 600  
Duluth, GA 30097  
678.542.3600  
800.995.2222  
678.542.3700 Fax  
www.diversitech.com

©2021 DiversiTech Corporation  
LIT-CAT-POOL, 10/21

Download an electronic copy of this catalog at  
<http://media.diversitech.com/doc/DOC00234.pdf>

**ULTRALITE® LIGHTWEIGHT CONCRETE EQUIPMENT PADS**

**3" UltraLite® Pads**

A true concrete equipment pad at the weight of plastic (about 2.5 lbs. per square foot). UltraLite® is strengthened by miles of fiber in each square foot of fiber-cement coating. This fiber allows the pad to flex instead of cracking or breaking. The textured surface prevents the condensing unit or portable generator from sliding, and allows water drainage, while the engineered expanded polystyrene (EPS) core prevents warping and provides a solid bottom to resist settling. Unaffected by soil conditions, ultraviolet (UV) light, temperature extremes, and other weather conditions.



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
<b>UC2436-3</b>	24 X 36	26	15	415	EA	15
<b>UC2442-3</b>	24 X 42	28	15	445	EA	15
<b>UC2448-3</b>	24 X 48	30	15	475	EA	15
<b>UC3030-3</b>	30 X 30	23	15	370	EA	15
<b>UC3040-3</b>	30 X 40	33	15	520	EA	15
<b>UC3636-3</b>	36 X 36	30	15	475	EA	15
<b>UC3648-3</b>	36 X 48	37	15	580	EA	15
<b>U3660-3</b>	36 X 60	49	15	760	EA	15
<b>U3865-3</b>	38 X 65	85	15	1,300	EA	15
<b>U3870-3</b>	38 X 70	113	15	1,720	EA	15
<b>UC4040-3</b>	40 X 40	34	15	535	EA	15
<b>UC4042-3</b>	40 X 42	36	15	565	EA	15
<b>U4848-3</b>	48 X 48	85	15	1,300	EA	15
<b>U4866-3</b>	48 X 66	108	15	1,645	EA	15

**UltraLite® Earthquake Code Compliant Pads**

Required nearly exclusively in Southern California, the UltraLite® pad is available for compliance with strict attachment provisions detailed in earthquake prone local building codes. UltraLite® earthquake code compliant pads are only available for sale in regions where local codes mandate installation of pads with these particular characteristics. Currently these locales include most of Southern California, portions of Washington, and portions of Oregon.



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
<b>UC2424-3CA</b>	24 X 24	14	15	235	EA	15
<b>UC3030-3CA</b>	30 X 30	22	15	355	EA	15
<b>UC3036-3CA</b>	30 X 36	25	15	400	EA	15

**3" UltraLite® Wedge Pads**


The UltraLite® Wedge Pad is designed for Lennox condensing units.



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
<b>UC3132-3L</b>	31 X 32	23.33	15	350	EA	15
<b>UC3539-3L</b>	35 X 39	33.46	15	502	EA	15
<b>UC4044-3L</b>	40 X 44	37.53	15	563	EA	15

## E LITE® PLASTIC EQUIPMENT PADS

E Lite's rugged design provides uniform and generous ribbing for optimum, self-leveling ground support without inserts. The result is a pad that is lightweight, but not too light. A subtle texture prevents unit slide and presents a classic appearance, which is enhanced by rounded edges and a concrete gray color. Each pad is molded with a size label and a symbol representing content of recycled material.



### 2" E Lite® Pads

The 2" thick E Lite® pad is the choice for plastic pads. Codes have moved toward requiring 3" pads, check local codes for your requirements.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
<b>EL2424-2</b>	24 X 24	6	44	310	EA	44
<b>EL2430-2</b>	24 X 30	9	22	203	EA	22
<b>EL2436-2</b>	24 X 36	10	22	270	EA	22
<b>EL3030-2</b>	30 X 30	9	22	209	EA	22
<b>EL3036-2</b>	30 X 36	13	22	290	EA	22
<b>EL3040-2</b>	30 X 40	14	22	307	EA	22
<b>EL3434-2</b>	34 X 34	14	22	306	EA	22
<b>EL3636-2</b>	36 X 36	12	22	291	EA	22
<b>EL3648-2</b>	36 X 48	25	22	384	EA	22

### 3" E Lite® Pads


Codes have moved toward requiring 3" pads, check local codes for your requirements.



CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
<b>EL2424-3</b>	24 X 24	9	16	157	EA	16
<b>EL2436-3</b>	24 X 36	12	16	230	EA	16
<b>EL2448-3</b>	24 X 48	14	32	629	EA	32
<b>EL3030-3</b>	30 X 30	12	16	209	EA	16
<b>EL3636-3</b>	36 X 36	16	16	291	EA	16
<b>EL3648-3</b>	36 X 48	25	16	402	EA	16
<b>EL3870-3</b>	38 X 70	36	16	557	EA	16
<b>EL4848-3</b>	48 X 48	36	16	604	EA	16

## CLADLITE® LIGHTWEIGHT CONCRETE EQUIPMENT PADS


Concrete surface and superior performance at 20% the weight of conventional concrete pads. The cladding provides superior resistance to sun, moisture and freeze-thaw conditions; the engineered expanded polystyrene (EPS) core is virtually impervious to water, soil conditions, fungus and bacteria. Large CladLite® pads are further strengthened by continuous steel reinforcement throughout the cladding. CladLite® is code approved for installation throughout the U.S.



2424-2

### 3" CladLite® Pads

Used where codes have moved toward requiring 3" pads, check local codes for your requirements.



2424-3

### 2" CladLite® Pads

The 2" thick CladLite® pad is the choice for equipment pads. Codes have moved toward requiring 3" pads, check local codes for your requirements.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
<b>2424-2</b>	24 X 24	30	25	780	EA	25
<b>2436-2</b>	24 X 36	50	25	1,275	EA	25
<b>2442-2</b>	24 X 42	57	25	1,450	EA	25
<b>3030-2</b>	30 X 30	36	25	925	EA	25
<b>3036-2</b>	30 X 36	43	25	1,093	EA	25
<b>3143-2</b>	31 X 43	70	25	1,775	EA	25
<b>3232-2</b>	32 X 32	44	25	1,125	EA	25
<b>3434-2</b>	34 X 34	51	25	1,300	EA	25
<b>3636-2</b>	36 X 36	63	25	1,598	EA	25
<b>3640-2</b>	36 X 40	71	25	1,798	EA	25
<b>3648-2</b>	36 X 48	88	25	2,220	EA	25
<b>4147-2</b>	41 X 47	103	25	2,600	EA	25

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
<b>1636-3</b>	16 X 36	48	20	985	EA	20
<b>2424-3</b>	24 X 24	43	20	877	EA	20
<b>2436-3</b>	24 X 36	60	20	1,215	EA	20
<b>2448-3</b>	24 X 48	84	20	1,695	EA	20
<b>2626-3</b>	26 X 26	50	20	1,015	EA	20
<b>3030-3</b>	30 X 30	62	20	1,255	EA	20
<b>3036-3</b>	30 X 36	73	20	1,487	EA	20
<b>3636-3</b>	36 X 36	80	20	1,633	EA	20
<b>3648-3</b>	36 X 48	109	20	2,207	EA	20
<b>3660-3</b>	36 X 60	163	15	2,470	EA	15

U.S. Patent number 4,505,449, and patents pending. ICBO No. PFC-5112.

THE HURRICANE PAD™ CONCRETE EQUIPMENT PADS

**The Hurricane Pad™**

Designed specifically for the hurricane prone regions of Florida and the Gulf Coast, The Hurricane Pad™ meets stringent local code requirements for wind resistance. Heavier than a normal concrete pad, this 4" pad provides sufficient weight to meet code. The Hurricane Pad meets the Florida Building Code Notice and can withstand winds up to 150 MPH. For certain taller equipment, The Hurricane T Class Pad™ is needed. Due to their extra weight, standard freight terms only apply for shipments to Florida. All other shipments are shipped FOB Conyers, GA.



H2424-4

**The Hurricane T-Class Pad™**

The Hurricane T Class Pad™ is even heavier than The Hurricane Pad™ and is designed to meet the higher wind loads of taller equipment. The taller the piece of equipment mounted to the pad, the greater the wind load on the pad. These heavier 4" pads provide sufficient weight to meet code for these taller condensing units. The Hurricane T-Class Pad meets the Florida Building Code Notice and can withstand winds up to 175 MPH. Due to their extra weight, standard freight terms for The Hurricane T Class Pad™ only apply for shipments to Florida. All other shipments are shipped FOB Conyers, GA.




CATALOG NO.	SIZE	PALLET QTY.	UOM	ORDER MULTIPLE
H2424-4	24 X 24	16	EA	16
H2436-4	24 X 36	8	EA	8
H3636-4	36 X 36	8	EA	8
H3648-4	36 X 48	8	EA	8
H3672-4	36 X 72	8	EA	8
H4040-4	40 X 40	8	EA	8
H4242-4	42 X 42	8	EA	8

CATALOG NO.	SIZE	PALLET QTY.	UOM	ORDER MULTIPLE
HT2436-4	24 X 36	5	EA	5
HT3636-4	36 X 36	5	EA	5
HT3648-4	36 X 48	5	EA	5
HT3842-4	38 X 42	5	EA	5
HT4040-4	40 X 40	5	EA	5
HT4242-4	42 X 42	5	EA	5
HT4558-4	45 X 58	5	EA	5


**The Hurricane Pad™ MD**

The new Hurricane Pad™ MD is the newest in concrete pad technology from DiversiTech. The Hurricane Pad MD is a solid concrete pad designed for the strict requirements of Miami Dade county. The Hurricane Pad MD meets the Florida Building Code Notice and can withstand winds up to 175 MPH. This pad is made from a minimum 7000PSI solid concrete. For Florida shipments only.




CATALOG NO.	SIZE	PALLET QTY.	UOM	ORDER MULTIPLE
HMD3636-4	36 X 36 X 4	5	EA	5
HMD4040-4	40 X 40 X 4	5	EA	5

**Potential Hurricane Winds Map**

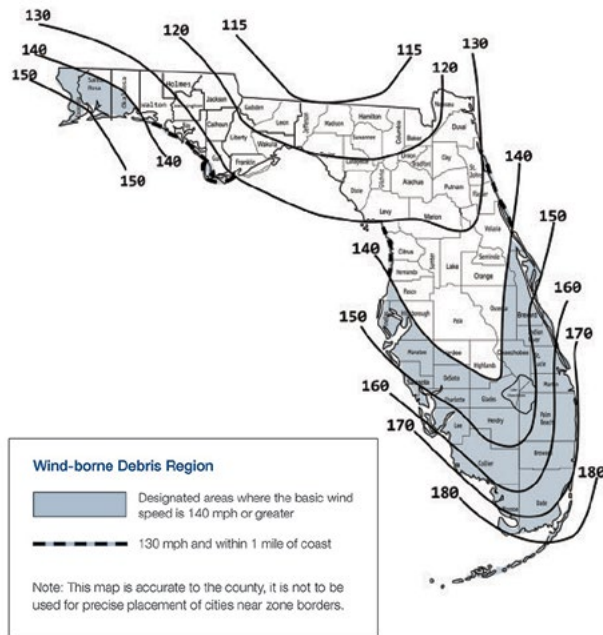

### The Hurricane Pad™ Tie Down Clips

Brackets used to secure condensing units to a pad or stand. These Florida approved clips use #8 self-tapping or self-drilling screws to secure to condenser.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>TDC-4</b>	The Hurricane Pad™ Attachment Bracket - 4", pack of 4	PK	1
<b>TDC-6</b>	The Hurricane Pad™ Attachment Bracket - 6", pack of 4	PK	1
<b>TDC-8</b>	The Hurricane Pad™ Attachment Bracket - 8", pack of 4	PK	1
<b>TDC-10</b>	The Hurricane Pad™ Attachment Bracket - 10", pack of 4	PK	1
<b>TDC-12</b>	The Hurricane Pad™ Attachment Bracket - 12", pack of 4	PK	1


### THE BLACK PAD® BLACK PLASTIC EQUIPMENT PADS

The Black Pad® is an innovative equipment pad. The pad is extremely durable, resistant to ultraviolet light, and heavier than a completely plastic pad. The Black Pad® is suitable for use with pool pumps, filters, and heaters and complies with the 1997 Standard Swimming Pool Code sections 305.2 Mounting and section 405 Equipment Foundations and Enclosures.



### The Black Pad® — 3"

Used where codes have moved toward requiring 3" pads. Check local codes for your requirements.



### The Black Pad® — 2"

The 2" thick Black Pad® is the choice for plastic pads. Codes have moved toward requiring 3" pads, check local codes for your requirements.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
<b>ACP24242</b>	24 X 24	10	24	231	EA	24
<b>ACP30302</b>	30 X 30	13	24	339	EA	24
<b>ACP32322</b>	32 X 32	16	24	387	EA	24
<b>ACP36362</b>	36 X 36	19	24	450	EA	24
<b>ACP38422</b>	38 X 42	25	24	549	EA	24

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
<b>ACP24243</b>	24 X 24	12	16	188	EA	16
<b>ACP30303</b>	30 X 30	20	16	274	EA	16
<b>ACP32323</b>	32 X 32	25	16	304	EA	16
<b>ACP36363</b>	36 X 36	23	16	367	EA	16
<b>ACP36483</b>	36 X 48	37	16	484	EA	16

### ECOPAD™ BLACK PLASTIC EQUIPMENT PADS

An injection molded equipment pad created from 100% recycled materials to minimize environmental impact. It does not require any additional equipment for moving and handling. EcoPad™ is resistant to impact, ultra-violet degradation and weathering (virtually impervious to climatic variations), and will not crack, flake, or warp. Drillable to permit installation of refrigerant and electrical lines under and through the pad and to allow equipment to easily secure to the pad.



### EcoPad™ — 3"

Used where codes have moved toward requiring 3" pads, check local codes for your requirements.



### EcoPad™ — 2"

The 2" thick EcoPad™ is the choice for plastic pads. Codes have moved toward requiring 3" pads, check local codes for your requirements.

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
<b>EP2424-2</b>	24 X 24 X 2	6	24	166	EA	24
<b>EP2436-2</b>	24 X 36 X 2	10	24	227	EA	24
<b>EP3030-2</b>	30 X 30 X 2	9	24	224	EA	24
<b>EP3036-2</b>	30 X 36 X 2	13	24	294	EA	24
<b>EP3232-2</b>	32 X 32 X 2	10	24	260	EA	24
<b>EP3434-2</b>	34 X 34 X 2	14	24	339	EA	24
<b>EP3636-2</b>	36 X 36 X 2	12	24	299	EA	24
<b>EP3648-2</b>	36 X 48 X 2	19	24	476	EA	24
<b>EP3842-2</b>	38 X 42 X 2	17	24	430	EA	24

CATALOG NO.	SIZE	PAD WT.	PALLET QTY.	PALLET WT.	UOM	ORDER MULTIPLE
<b>EP2424-3</b>	24 X 24 X 3	9	16	150	EA	16
<b>EP2436-3</b>	24 X 36 X 3	12	16	210	EA	16
<b>EP3636-3</b>	36 X 36 X 3	16	16	271	EA	16
<b>EP3640-3</b>	36 X 40 X 3	23	16	360	EA	16
<b>EP3842-3</b>	38 X 42 X 3	18	16	311	EA	16
<b>EP3870-3</b>	38 X 70 X 3	36	16	545	EA	16

# Get The Conduit You Need

## DiversiTite™



DiversiTite™ liquid tite conduit from DiversiTech has everything you need for even the toughest jobs. And it's available in any size you need from 3/8" all the way up to 2", It's available in easy to use rolls from 50' to 1000'. DiversiTite™ is tough and durable, ideal for any installation. And it's made right here in the USA. DiversiTite™ is the conduit worth asking for.



# Save Time with DIVERSITECH WHIPS



DiversiTech Electrical Whips are a labor saving kit for hookup of swimming pool motors, pumps, filters, heaters and timers. Each whip includes three distinct wire colors for easy hookup and 1 straight and 1 90 degree connector. DiversiTech whips include flexible, moisture-proof conduit designed to stand up to the demands of life outdoors. Help your customers do more in less time with dependable whips from DiversiTech.

# THE Gas Grill SPLATTER MAT™



## WHY THE GAS GRILL SPLATTER MAT™?

The Gas Grill Splatter Mat™ is a high quality deck protector designed exclusively for gas grills. This reversible mat protects decks from damage by trapping grease and other liquids associated with gas grilling. Composed of non-woven fiber materials and a patented media, The Gas Grill Splatter Mat™ is the only reversible deck protector, so both sides can be used to protect any deck surface including: Wood, Brick, Stone, Slate, Cement, and Composite Decking.



Heavy-duty reversible mat

## TECHNOLOGY OF PROTECTION

Reversible Non-Woven Soft-Touch™ Media (100% Recyclable)




Barrier Media prevents soak-through of grease and other gas grill-related "splatters"

Compatible with composite decking



## THE PRODUCT LINE



**SPL-48**  
The Gas Grill Splatter Mat™  
48" x 30"

## BENEFITS CONSUMERS WANT

- Heavy-duty absorbent surface
- Traps grease and liquids
- Easily cleaned



Black



Double-sided/  
reversible use




# WHY THE ULTRA GRILL MAT

The ULTRA Grill Mat™ is the ultimate protection for deck and patio areas. Engineered with a special rubber formulation, the ULTRA Grill Mat™ is designed to withstand the most demanding outdoor living conditions. DiversiTech's ULTRA Grill Mat™ sets a new standard for surface protection unrivaled by any product on the market and targets the outdoor enthusiast who demands the best protection available.



## FEATURES AND BENEFITS


- Flexible material remains flat to the surface - will not crack, curl, or tear
- Integrated perimeter border contains liquid spills
- UV treatment protects against fading and material breakdown for extended product life
- 30" x 30", 48" x 30" and 60" x 30"
- Easy cleaning - rinse or scrub



**UGM-3030**  
ULTRA Grill Mat™  
30" x 30"  
UPC: 0-95247-17159-0  
QTY: 4




Black



**UGM-6030**  
ULTRA Grill Mat™  
60" x 30"  
UPC: 0-95247-18302-9  
QTY: 4



Black



**UGM-4830**  
ULTRA Grill Mat™  
48" x 30"  
UPC: 0-95247-15823-2  
QTY: 4



Black

## HIGHEST RATED SURFACE PROTECTION AGAINST

- Embers
- Sparks
- Oil
- Grease
- Spills
- Drippings
- Splatters

## PROTECTS MULTIPLE SURFACES

- Wood
- Composite
- Cement
- Brick
- Slate
- Stone
- Tile

## WORKS GREAT WITH



GAS GRILLS



CHARCOAL GRILLS



FRYERS



FIRE PITS



**CONDUIT, FITTINGS, CABLE**

**DiversiTite™ Flexible Conduit**

For electrical applications: outside, inside and industrial uses including transformer connections, air conditioning and heating. Joins with metallic or non-metallic connectors, easy to cut. Impact resistant, chemical resistant, and will not kink. U.L. and C.U.L. Listed. For use as indicated in Article 351 of the 1987 NEC.



**750-12100**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>750-12100</b>	1/2" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
<b>750-12100BOX</b>	1/2" x 100' Liquid Tite Conduit – Non-Metallic, 1000' per roll	EA	1
<b>750-34100</b>	3/4" x 100' Liquid Tite Conduit – Non-Metallic, 100' per roll	EA	1
<b>750-600</b>	3/4" x 100' Liquid Tite Conduit – Metallic, 100' per roll	EA	1
<b>750-121000</b>	1/2" x 1000' Liquid Tite Conduit – Non-Metallic, 1000' per roll	EA	1
<b>750-34800</b>	3/4" x 800' Liquid Tite Conduit – Non-Metallic, 800' per roll	EA	1

**Liquid Tite Connectors**

For use with metallic and non metallic liquid tite conduit, Type B. Provides smooth connection, no sharp edges to strip wire. Wiring easily pulled through. U. L. Listed. C.U.L. Listed.



**750-MLT50 750-NMLT50**

**750-NMLT9050**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>750-NMLT50</b>	1/2" Non-Metallic Straight Connector	EA	25
<b>750-NMLT4550</b>	1/2" Non-Metallic 45 Degree Elbow Connector	EA	10
<b>750-NMLT9050</b>	1/2" Non-Metallic 90 Degree Elbow Connector	EA	10
<b>750-NMLT75</b>	3/4" Non-Metallic Straight Connector	EA	10
<b>750-NMLT9075</b>	3/4" Non-Metallic 90 Degree Elbow Connector	EA	10
<b>750-NMLT100</b>	1" Non-Metallic Straight Connector	EA	5
<b>750-MLT50</b>	1/2" Metallic Straight Connector	EA	25
<b>750-MLT9050</b>	1/2" Metallic 90 Degree Elbow Connector	EA	10
<b>750-SLTC50</b>	1/2" Non-Metallic Screw On Connector	EA	
<b>750-SLTC9050</b>	1/2" Non-Metallic Connector, SO EI	EA	

**CAPACITORS**

**Motor Run Capacitors—370VAC**

This single capacitance round, metal can capacitors are designed for continuous run.



**37050R**

CATALOG NO.	uf	UOM	ORDER MULTIPLE
<b>37250R</b>	25	EA	1
<b>37300R</b>	30	EA	1
<b>37350R</b>	35	EA	1
<b>37400R</b>	40	EA	1
<b>37450R</b>	45	EA	1
<b>37500R</b>	50	EA	1

\*Compact size, ideal for swimming pool motors.

**Motor Run Capacitors—370VAC**

This dual capacitance round metal can capacitors are designed for continuous run.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
<b>3GR1035</b>	35+10	EA	1

**Motor Start Capacitors – 110/125 VAC**

Variable capacitance. Round, plastic can.



CATALOG NO.	uf	UOM	ORDER MULTIPLE
<b>124-156</b>	124-156	EA	1
<b>460-552</b>	460-552	EA	1

**PVC PRIMER AND CEMENT**

**Pro-Weld™ PVC Cement (Regular Body)**

Pro-Weld™ PVC Cement is a clear, regular bodied solvent cement designed to be used on Type I and II PVC pipe and fittings up to and including 4 inch diameter. Pro-Weld™ meets ASTM Standard D-2564.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>PW-16</b>	Pro-Weld™ – 16 oz. Brush-Top Container – Regular Body	EA	24

**Pro-Weld™ PVC Cement (Heavy Body)**

Pro-Weld™ Heavy Body is a clear, heavy bodied, very high strength industrial grade PVC cement. It has a medium setting time and works with all rigid schedule 40 and 80 pipe diameters up to 12 inches. Complies with ASTM D2564 and NSF.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>PWH-16</b>	Pro-Weld™ – 16 oz. Brush-Top Container – Heavy Body	EA	24

**Pro-Weld™ PVC Cement (Pool and Turf – Blue)**

Pro-Weld™ Blue Pool and Turf is a blue colored, medium bodied, high strength PVC cement for welding rigid or flexible PVC in wet conditions where the system needs to be pressurized quickly. Pro-Weld Blue Pool and Turf sets up very fast and works with all rigid and flexible schedule 40 and 80 pipe diameters up to 6 inches. Complies with ASTM D2564 and NSF.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>PWB-16</b>	Pro-Weld™ – 16 oz. Brush-Top Container – Pool and Turf – Blue	EA	24
<b>PWB-32</b>	Pro-Weld™ – 32 oz. Brush-Top Container – Pool and Turf – Blue	EA	24

**Pro-Weld™ PVC Cement (Universal – PVC/ABS/CPVC)**

Pro-Weld™ Universal Cement is a clear, medium bodied, high strength cement for use on PVC to PVC, CPVC to CPVC, and ABS to ABS connections. Pro-Weld Universal sets up fast and works with all rigid schedule 40 and 80 piping up to 6 inches in diameter. Complies with ASTM D2564, D2235, and F493.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>PWU-4</b>	Pro-Weld™ – 4 oz. Brush-Top Container – Universal – PVC/ABS/CPVC	EA	24

**Pro-Prime™ Clear PVC Primer**

Clear primer that removes dirt and oil from the surface of Type I and II PVC piping. Softens the piping to prepare for solvent welding. Pro-Prime Clear primer meets ASTM Standard F-656.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>PPC-16</b>	Pro-Prime™ Clear – 16 oz. Brush-Top Container	EA	24

**OATEY® PRODUCTS**

**Purple Primer for PVC Pipe and Fittings (Black Label)**

Recommended for all PVC and CPVC installations – all sizes/schedules. Purple tinted primer formulated to remove surface dirt and grease as well as soften the pipe surface to allow for a fast, secure and permanent solvent weld. For use in areas where codes call for primer verification.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>530-30757</b>	Purple Primer – 16 oz.	EA	24

NSF and UPC listed. Exceeds ASTM F-656.

**Heavy Duty PVC Cement**

Heavy bodied clear cement recommended for use on PVC pipe and fittings up to 12" in diameter for Sch. 40 and Sch. 80 potable water pressure pipe, gas, conduit, drain waste and vent pipe. Exceeds ASTM D-2564.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>530-30876</b>	Heavy Duty Cement – 16 oz.	EA	24

**MANOMETERS, PRESSURE AND TEST KITS**

**Hydrogauge Manometer**

- Economical Pressure measurements.
  - Replaces ordinary U-tube manometers
  - Measures gas pressure easily and efficiently
  - Direct reading, no plus or minus readings to add together as in old fashioned U-tubes
  - Fills like a glass of water, no more air bubbles
  - Strong magnet for mounting
  - Heavy-duty construction
  - Made of industrial grade, flexible PVC plastic
  - Lightweight; Easy to use
  - 6-HG15 water column height: 15"
  - Plastic: 30" to 36" of industrial grade flexible plastic
  - Hose fitting: All brass
- Includes: Mounting magnet.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>6-HG15</b>	Hydrogauge Manometer	EA	1

**SEALANT, EPOXY, GLUE**

**Fast Cure Epoxy**

An easy-to-use, two part putty you simply mix and mold like clay. No complicated weighing or measuring required. Easy 1:1 cut-what-you-need mix ratio. Form it into any shape. It hardens in one hour and makes a final, steel-hard cure in 12 hours and can be sanded, drilled, machined, sawed and painted. Use on metal, wood, brick, stone, concrete, fiberglass, porcelain, tile and mot plastics. Cures under water. 1.0 lb.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>DEP8002</b>	White Epoxy Putty – 1 lb. Kit	EA	24

**SEALING COMPOUNDS, ADHESIVE**

**Flexi-Patch™**

Flexi-Patch™ is an easy to use flexible repair patch ideal for repairing almost any surface. It cures quickly using only UV light from sunlight or a UV flashlight for a long lasting, permanent repair. Flexi-Patch is a fiberglass-reinforced polyester ideal for use on PVC, plastics, metal, wood, concrete and more. It's the easy way to permanently patch almost any surface. It dries hard for permanent repair. Can be drilled, tapped and painted once dry.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>FP-36</b>	Flexi-Patch fiberglass patch	EA	20

**Silicone Sealant**

Food grade 100% RTV Silicone Sealant. Can be used in applications for continuous use to 450°F. UV and water resistant. Long-term flexibility. Non-paintable. Available in 10.3 fl. oz. tube for use in standard caulk gun or in 3 fl. oz. squeeze tube.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>7-4001</b>	Clear Silicone Sealant – 3 fl. oz. Squeeze Tube	EA	48
<b>7-4000</b>	Clear Silicone Sealant – 10.3 fl. oz. Squeeze Tube	EA	12

**WORKLIGHTS BY CLIPLIGHT®**

**Clipstrip™ / Clipstrip 2™**

Clipstrip™ is a powerful pocket light with 140 lumens and includes a pivoting magnetic clip. It is available in yellow or camo with three AAA batteries included.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
111112	Clipstrip™ Pocket Light	EA	12
111116	Clipstrip™ Pocket Camo Light	EA	12

**Clipstrip™ Aqua**

Clipstrip™ Aqua is a waterproof light with 180 lumens and includes a magnetic clip and floats. It is available in yellow and comes with a rechargeable 2200 mAh lithium-ion battery. Sold individually.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
111113	Clipstrip™ Aqua Light	EA	1

**PIVOT™**

The PIVOT™ is a light that has a 360° swivel hook with 240 lumens and magnetic base and back. Three AA batteries included.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
111114	PIVOT™ Pivoting Work Light	EA	9

**PIVOT™ mini**

The PIVOT™ mini is a light that has a 360° swivel hook with 120 lumens and magnetic back and base. Lights on front and top with three AAA batteries included. Available in yellow or camo.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
111115	PIVOT™ mini Pivoting Work Light	EA	12
111117	PIVOT™ mini Pivoting Work Light, Camo	EA	12

**PIVOT™ 33**

The PIVOT™ 33 is a light that has a 360° swivel hook with 160 lumens and magnetic back and pivoting base. Lights on front and top with three AA batteries included. Available in yellow or camo.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
24-458	PIVOT™ 33 Work Light	EA	9
24-460	PIVOT™ 33 Work Light, Camo	EA	9

**LEAK DETECTORS AND ACCESSORIES**

**SEEKERmini™**

High powered UV light with 3 AAA batteries included with no UV enhancing glasses required.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
84DCPLUS	SEEKERmini™ UV LED Worklight	EA	1

**UV Pocket Light**

UV Pocket Light with 3 AAA batteries included. A great light to pair with 995 Flex Inject® Sealant and 990 Flash™ Detect Inject.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
89DC	UV Pocket Light	EA	12

**CONDENSATE DRAIN PANS, FITTINGS, ADAPTERS**

**A/C Secondary Condensate Drain Pans**

Rolled edges for durability, ribbed bottoms for rigidity, and reinforced corners for strength. 3/4 in. PVC fittings are included with each pan. No seams, no rust, and no leakage. ABS materials will not put out toxic smoke. Available in over 20 convenient sizes. Five pans per clip.




CATALOG NO.	BOTTOM DIMENSION		OVERALL DIMENSION		DEPTH		UOM	ORDER MULTIPLE
	IN.	CM.	IN.	CM.	IN.	CM.		
<b>6-2424L</b>	24" x 24"	61 x 61	26" x 26"	66 x 66	2"	5	EA	5
<b>6-2739L</b>	27" x 39"	69 x 99	29" x 41"	74 x 104	2"	5	EA	5
<b>6-2748L</b>	27" x 48"	69 x 122	29" x 50"	74 x 127	2"	5	EA	5
<b>6-3030L</b>	30" x 30"	76 x 76	32" x 32"	81 x 81	2"	5	EA	5
<b>6-3060L</b>	30" x 60"	76 x 152	32" x 62"	81 x 157	2"	5	EA	5
<b>6-3636L</b>	36" x 36"	91 x 91	38" x 38"	97 x 97	2"	5	EA	5
<b>6-3660L</b>	36" x 60"	91 x 152	38" x 62"	97 x 157	2"	5	EA	5

L = Drain Line Outlets in Long Side, S = Drain Line Outlets in Short Side

**Metal Drain Pan**

The ultimate in drain pan design — tailored for easy distribution and installation. Full of features to make life easier on both the distributor and the contractor. Seamless, one piece metal construction with rolled edges on all sides for maximum safety and integrity. Nestable as well — a stack of 70 pans is only a foot high! Once on site, you'll never have to return to the distributor for missing parts. The fittings are packaged with the pan for simple and efficient installation. Choose between two possible drain outlet positions and install with confidence.




CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>6-M3030</b>	26 Gauge Metal Drain Pan – 30" x 30"	EA	5

**TAPES**

**Cloth Duct Tapes**

High tack, excellent strength. Superior performance in sealing air handling systems. Heavy cloth content for easier tearing and additional strength. Made in the USA.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>PC-609-S</b>	2" x 60 Yards – Industrial Grade Duct Tape – Silver	EA	24

**PTFE Tape**

Made of pure white PTFE. Non toxic. For use with chemicals, solvents, oxygen, and on food lines. Withstands up to 2000 psi of pressure.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>6-736</b>	Teflon Tape – 3/4" x 260"	EA	100

**WHIPS FOR SWIMMING POOL INDUSTRY**

**DiversiWhips for the Swimming Pool Industry**

A labor saving kit for hookup of swimming pool motors, pumps, filters, and timers. Three distinct wire colors for ease of hookup. 1 straight and 1 90 degree non-metallic connector included.



**6-12-4NMSWP**

CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>6-34-4NM</b>	3/4" x 4' #8 THHN Wire – In Box	EA	6
<b>6-34-6NM</b>	3/4" x 6' #8 THHN Wire – In Box	EA	6

**Solid Wire Whips**

<b>6-12-6NMP</b>	1/2" x 6', #12 Wire, 30 Amp - Non-Metallic Conn.	EA	6
<b>6-12-4NMSWP</b>	1/2" x 4' #12 Solid 3 Wire – Non-Metallic Conn.	EA	6
<b>6-12-6NMSWP</b>	1/2" x 6' #12 Solid 3 Wire – Non-Metallic Conn.	EA	6
<b>6-12-8NMSWP</b>	1/2" x 8' #12 Solid 3 Wire – Non-Metallic Conn.	EA	3

**DUCT STRAP**

**Duct Strap – Metallic – Roll**

Galvanized duct strap in a convenient cardboard dispenser is not only easy to drill or nail, but also solid strapping. Plenum rated.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>710-001</b>	Metallic Duct Strap – 26 Gauge – 1" x 100'	EA	1

**MAGNETIC NUT DRIVERS**

**Quick-Change Magnetic Nut Driver**

High tack, excellent strength. Superior performance in sealing air handling systems. Heavy cloth content for easier tearing and additional strength. Made in the USA.



CATALOG NO.	DESCRIPTION	UOM	ORDER MULTIPLE
<b>1937818</b>	Nut Drv, QC Stubby, 1/4-5/16 in	EA	

**WIRE/CABLE TIES**

**Black Nylon Wire Ties**

These wire ties are perfect for securing wires. You can choose from an assortment of sizes. Ultraviolet resistant for outdoor use.



CATALOG NO.	DESCRIPTION	TENSILE STRENGTH	UOM	ORDER MULTIPLE
<b>WTB11D</b>	Black Wire Ties – 11" Nylon, pack of 500	50	PK	1
<b>WTB15C</b>	Black Wire Ties – 15" Nylon, pack of 100	50	PK	1