

Hillsboro Series 60 x 36 Skirted Baths



Whirlpool & Soaking

Features

- Durable, easy-care acrylic construction
- Eight adjustable, color-matched hydro jets, including a lumbar jet
- Factory-preset air controls for whirlpool action
- Air-activated on/off switch
- Textured slip-resistant bottom
- Integral tile flange
- Safety suction and silent air induction
- Available as an invigorating whirlpool and an unjetted soaking bath
- Available in white (WH) and biscuit (BS)


General Specifications

- 60" length overall
- 36" width overall
- 19-1/2" height overall
- 52 gallon total capacity to overflow
- Prewired for simple plug-in installation
- Requires a single 115V/20A GFCI circuit



PFW6036ALSKNWH

Product Specifications

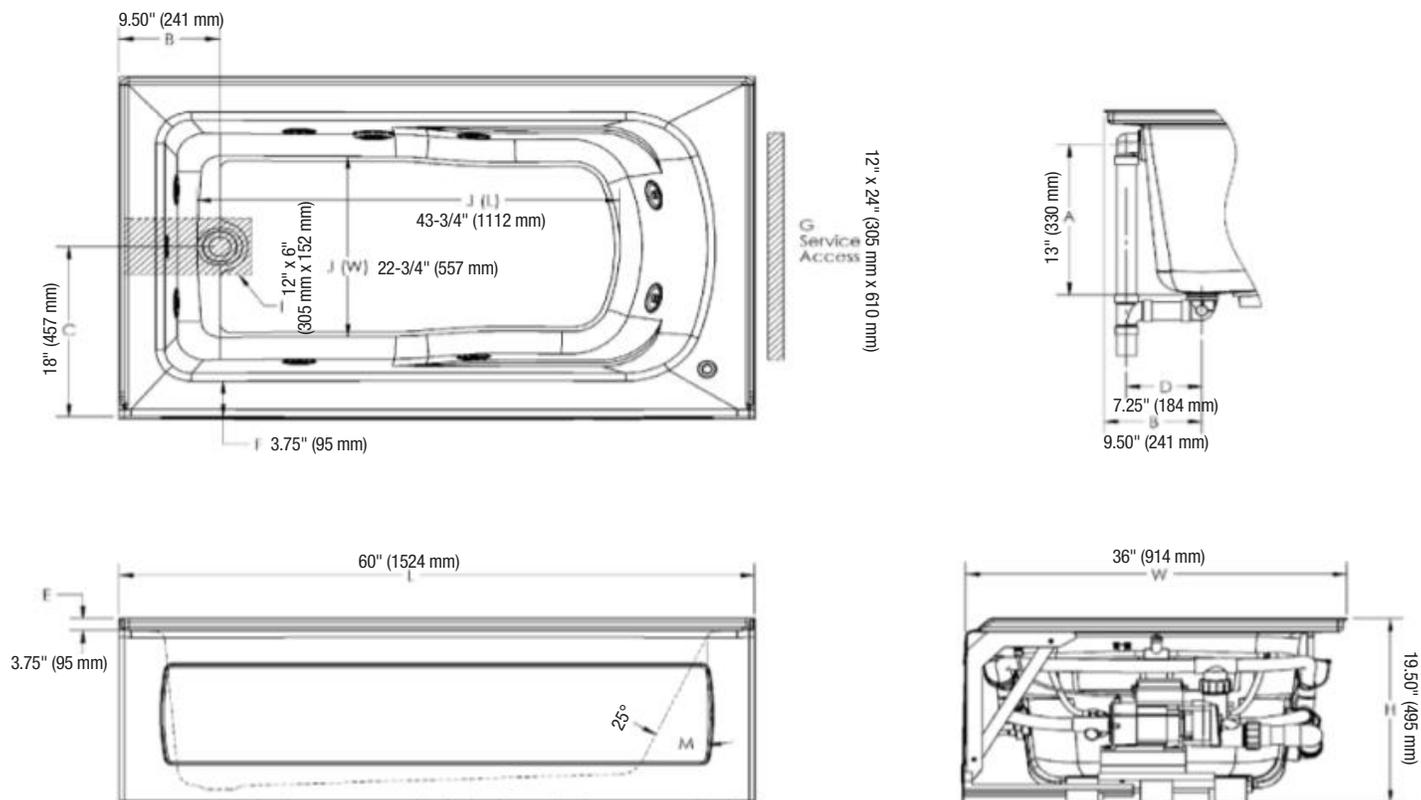

*Left hand model shown. Right hand model is exact opposite.

Hillsboro Series 60 x 36 Skirted Baths



Whirlpool & Soaking

Model Numbers

PFW6036ALSKN	60" x 36" whirlpool with integral skirt - left hand drain
PFW6036ARSKN	60" x 36" whirlpool with integral skirt - right hand drain
PFS6036LSKN	60" x 36" soaking bath with integral skirt - left hand drain
PFS6036RSKN	60" x 36" soaking bath with integral skirt - right hand drain

Recommended Parts

MB644BN	17-22 PVC cable drain with trim - BN
MB644CP	17-22 PVC cable drain with trim - CP
MB644ORB	17-22 PVC cable drain with trim - ORB
MB644PN	17-22 PVC cable drain with trim - PN
MB643BN	17-22 ABS cable drain with trim - BN
MB643CP	17-22 ABS cable drain with trim - CP
MB643ORB	17-22 ABS cable drain with trim - ORB
MB643PN	17-22 ABS cable drain with trim - PN

Warranty and Codes

This product features a 5-year limited warranty and meets or exceeds the following standards: Whirlpools - IAPMO PS32-84, UL listing 1795, ANSI Z124.1-95, ASME A112.19.8M-87R(96) and ASME A112.19.7M-95. Baths - ANSI Z124.1-95. In an effort to continually improve our products, design changes may periodically be made. Ferguson reserves the right to provide newly designed material to fill any order unless otherwise agreed to in writing.

