



# QER\_X

## F1960 EXPANSION PEX REINFORCING RING WITH STOP

### Engineering Specification: Zurn QER\_X


Zurn PEX® F1960 Expansion PEX Reinforcing Ring w/Stop. The QER\_X is used with Zurn Non-Barrier Pex pipe in potable water applications. Molded from PEX with integral positioning tabs.

### Standards Compliance

- ASTM F1960
- CSA B137.5
- NSF/ANSI Standard 61



### Features

RATED PRESSURES AND TEMPERATURES (AS A SYSTEM WITH ZURN PEX PIPE AND FITTINGS)			
	ALL SIZES		
PRESSURE (PSI)	160	100	80
TEMPERATURE (°F)	73	180	200



### Accessories

- QEMT345 - F1960 Manual Expansion Tool Kit - 1/2" to 1"

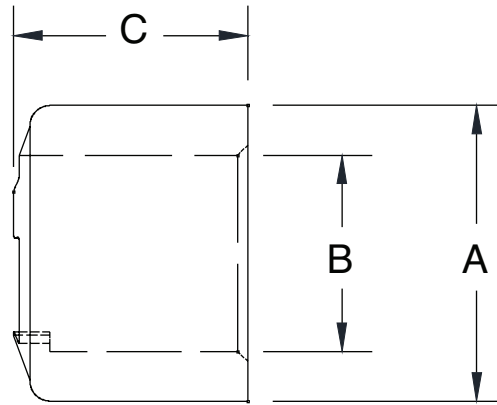

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

PART NUMBER	F1960 EXPANSION PEX REINFORCING RING W/STOP	DIMENSIONS (approximate)					
		A		B		C	
		in.	mm	in.	mm	in.	mm
QER2X	3/8" EX PEX	0.73	19	0.49	12	0.59	15
QER3X	1/2" EX PEX	0.88	22	0.63	16	0.68	17
QER4X	3/4" EX PEX	1.13	29	0.88	22	0.92	23
QER5X	1" EX PEX	1.42	36	1.13	29	1.17	30
QER6X	1-1/4" EX PEX	1.66	42	1.39	35	1.41	36
QER7X	1-1/2" EX PEX	1.92	49	1.64	42	1.67	42
QER8X	2" EX PEX	2.63	67	2.15	55	2.03	52