

Job Name:	
System Reference:	Date:



Indoor Unit: PKA-A12HA6



Outdoor Unit: PUY-A12NHA6 (-BS)

### UNIT OPTION:

- Standard Model.....PUY-A12NHA6
- Seacoast (BS) Model.....PUY-A12NHA6-BS

### ACCESSORIES:

#### Indoor Unit

- Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- Condensate Pump (Sauermann SI30-115/230; 115/230V)
- Disconnect Switch (TAZ-MS303)
- Wireless Remote Controller (PAR-FL32MA-E)
- Wireless Signal Receiver (PAR-FA32MA-E)

#### Outdoor Unit

- Wind Baffle (WB-PA1)\*
- \*Allows operation to 0° F (-18° C).
- Advanced Wind Baffle Kit (WB-PA1 + TBD)\*\*
- \*\*Allows operation to -20° F (-29° C). Operation to -40° F (-40° C) requires additional accessories.
- Please contact your Mitsubishi Electric representative for additional information.
- Air Outlet Guide (PAC-SG58SG-E)
- Wall Bracket (QSWB2000M-1)

#### Controls

- Wireless Controller (MHK1)
- Advanced Wired Controller (PAR-31MAA)
- Simple Wired Controller (PAC-YT53CRAU)
- M-NET Adapter (PAC-SF83MA-E)
- Temperature Sensor (PAC-SE41TS)

### SPECIFICATIONS:

Rated Conditions (Capacity / Input)*		
Cooling	Btu/h / W	12,000 / 1,190

\* Rating Conditions per AHRI Standard:  
 Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB  
 Cooling | Outdoor: 95° F (35° C) DB / 75° F (24° C) WB

Capacity Range		
Cooling	Btu/h	6,000 - 12,000

Operating Range		
Cooling	-20° F to 115° F (-29° C to 46° C) DB**	

\*\*Applies only to systems utilizing Advanced Wind Baffle Kit.  
 Equipment operation range without any additional accessories: 23° F to 115° F (-5° C to 46° C) DB.  
 Equipment operation range with Standard Wind Baffle: 0° F to 115° F (-18° C to 46° C) DB.  
 For operation below -20° F (-29° C) DB, please contact your Mitsubishi Electric representative.

AHRI Efficiency Ratings	
EER	10.1
SEER	15.2

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz
-------------------------------	----------------------------

Minimum Circuit Ampacity (MCA)		
Indoor / Outdoor	A	1 / 13

Indoor Unit		
Blower Motor (ECM)	F.L.A.	0.33
Blower Motor Output	W	30
SHF / Moisture Removal	0.81 / 2 pt./h	

Outdoor Unit		
Compressor	DC INVERTER-driven Twin Rotary	
Fan Motor (ECM)	F.L.A.	0.35
MOCP	A	15

Airflow Rate (Low-Mid-High)			
Indoor (Cooling)	DRY	CFM	320-370-425
	WET		290-335-380
Outdoor	DRY		1,200

Sound Pressure Level			
Indoor (Low-Mid-High)		dB(A)	36-40-43
Outdoor	Cooling		48

External Dimensions		
Indoor (H x W x D)	In.(mm)	11-5/8 x 35-3/8 x 9-13/16 (295 x 898 x 249)
Outdoor (H x W x D)		23-5/8 x 31-1/2 x 11-13/16 + 7/8 (600 x 800 x 300 + 23)

Net Weight		
Indoor	Lbs.(kg)	29 (13)
Outdoor		82 (37)


External Finish	
Indoor	Munsell No. 1.0Y 9.2 / 0.2
Outdoor	Munsell No. 3Y 7.8 / 1.1

Refrigerant	R410A ; 3lbs., 12oz.
-------------	----------------------


Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	1/4 (6.35)
Gas (Low Pressure)		1/2 (12.7)
Maximum Total Refrigerant Pipe Length	Ft. (m)	165 (50)
Maximum Vertical Separation	Ft. (m)	100 (30)

# DIMENSIONS: PKA-A12HA6 & PUY-A12NHA6 (-BS)

## PKA-A12HA6

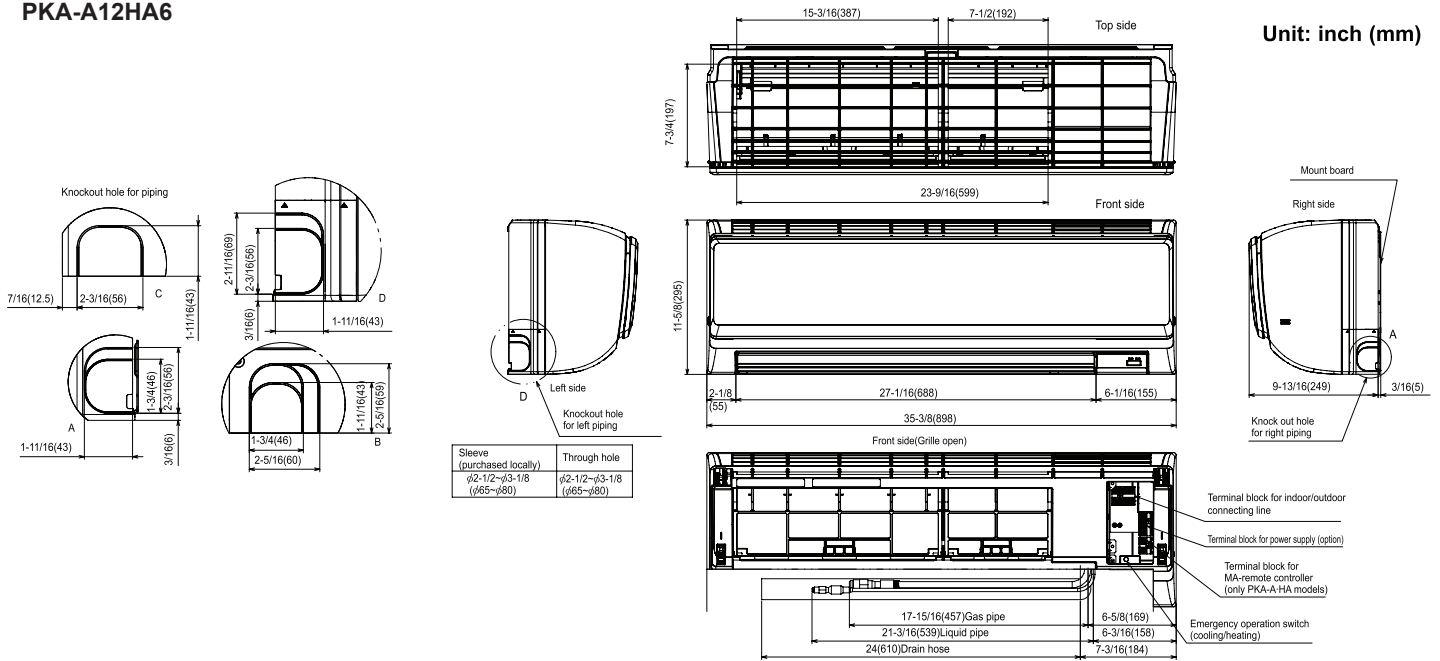

## PUY-A12NHA6 (-BS)

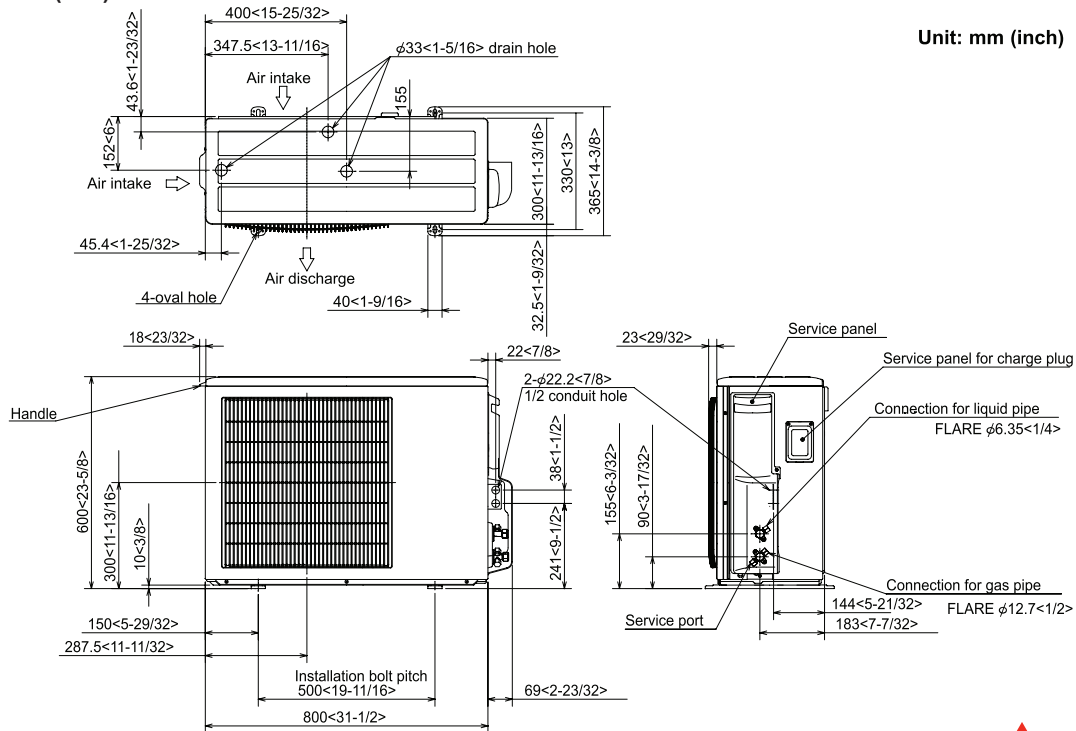

**NOTES:**  
SEACOAST PROTECTION

- External Outer Panel: Phosphate coating + Acrylic-Enamel coating
- Fan Motor Support: Epoxy resin coating (at edge face)
- Separator Assembly ; Valve Bed: Epoxy resin coating (at edge face)
- Screws (used outer side): Zinc nickel coating 5µm + Polyvinylidene chloride coating

**“Blue Fin” treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants..**



COOLING & HEATING

1340 Satellite Boulevard. Suwanee, GA 30024  
Toll Free: 800-433-4822 www.mehvac.com

