

PRODUCT SPECIFICATIONS

Vandal-Resistant Retrofit Filtration Kit with, 1500-Gallon Lead and CTO Filter. Overall dimensions are 16-3/8" x 11-1/4" x 4-5/8". Made of Stainless Steel.

Special Features:	Vandal-Resistant, Filtered
Material:	Stainless Steel
Finish:	Stainless Steel
Gauge:	20
Dimensions:	16-3/8" x 11-1/4" x 4-5/8"
Shipping Weight:	9
Capacity:	
Flow Rate:	1.5 GPM (5.6 L/m)
Temperature:	40-100°F (4-38°C)
Initial Pressure Drop:	2-5 PSI (14-34 kPa)
Maximum Pressure:	105 PSI (724 kPa)
Minimum Pressure:	20 PSI (138 kPa)
Water Inlet:	3/8" (9.5mm) O.D. tube
Water Outlet:	1/4" (6.4mm) O.D. tube


- **WATERSENTRY VII FILTER:** 1,500-gallon capacity filter certified for reduction of lead, chlorine, taste, odor and Class 1 particulate.
- Filter should be replaced every 3,000 gallons or 1 year after installation
- **VERSATILE MOUNTING:** Box can be mounted virtually anywhere near an accessible water line.
- Filter is certified to NSF 42 and 53 for lead, particulate, chlorine, taste and odor reduction



Included with Product: WaterSentry VII Filter, 20-Gauge stainless steel mounting box

AMERICAN PRIDE. A LIFETIME TRADITION.
Like your family, the ElKay family has values and traditions that endure. For almost a century, ElKay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.

[Installation Instructions \(PDF\)](#)
[Warranty \(PDF\)](#)

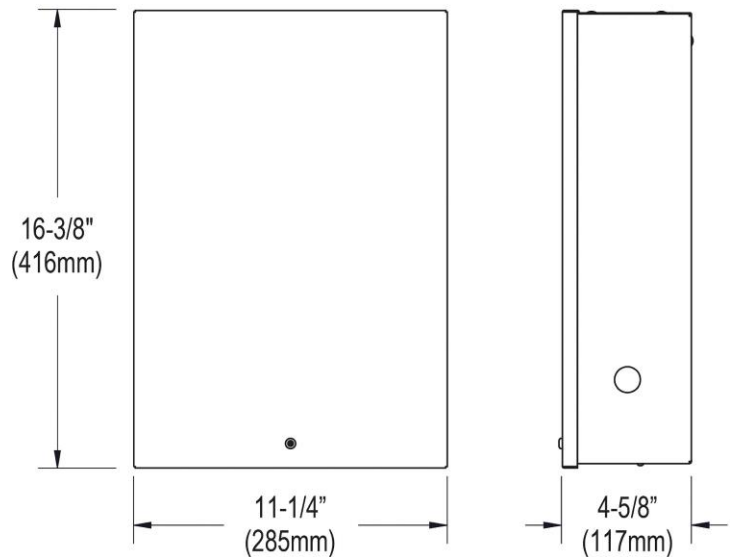

PART: _____ QTY: _____

PROJECT: _____

CONTACT: _____

DATE: _____

NOTES: _____

APPROVAL: _____

In keeping with our policy of continuing product improvement, ElKay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of ElKay product specification sheets. This specification describes an ElKay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.