


- Available in LED and GU24
- Molded of Durable Non-Corrosive UV Resistant Resins with Polycarbonate Base
- Wall or Ceiling Mount
- UL Listed for Wet Locations
- Standard Pack QTY: 6



EXAMPLE # FK395-LE1200C-BW

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
FK391 FK395	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70* AMBIENT OP TEMP -40°C (-40°F) TO +50°C (122°F), 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	W -White B - Black	POLYCARBONATE F -Frosted Prismatic W -White	P -Photocell
	LE800 - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt** W -900lm 3000K C -1000lm 4000K			
	LE1200 - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt** W -1350lm 3000K C -1400lm 4000K			
	LE1800 - 23W Power Input CRI 80 (TYP) >80 Lumens Per Watt** W -1850lm 3000K C -1900lm 4000K			
	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C (-40°F) TO +40°C (105°F), 3 YEAR WARRANTY	W -White B - Black	POLYCARBONATE F -Frosted Prismatic W -White	O -Occupancy Sensor P -Photocell
	L1800 - 8 Cree LED Array(22W) CRI 74 (TYP) >82 Lumens Per Watt** C -1824lm 4000K			
	GU24 BASE, 120V, ENERGY STAR WITH LAMP OPTION	W -White B -Black	POLYCARBONATE F -Frosted Prismatic W -White	L -2700K, CFL P -Photocell
	G13 -1 X 13W G213 - 2 X 13W G18 -1 X 18W G218 - 2 X 18W			

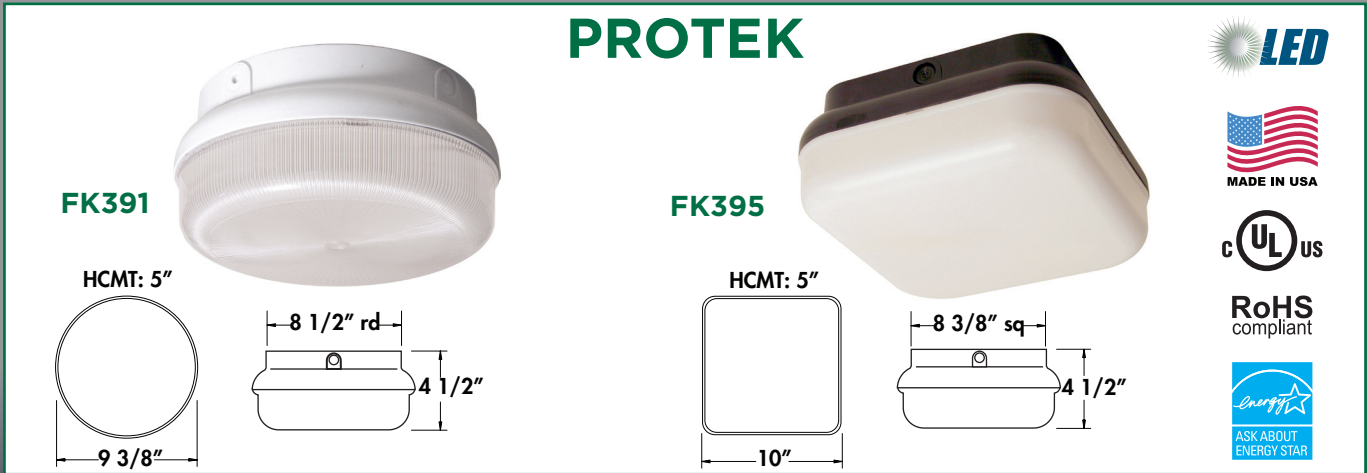

Scan the QR code to the left to access the Energy Star qualified product list.