


- Available in LED, Incandescent & GU24
- Molded of Durable Non-Corrosive UV Resistant Resins
- Fits Most 3" Diameter Posts
- UL Listed for Wet Locations
- Standard Pack QTY: 1

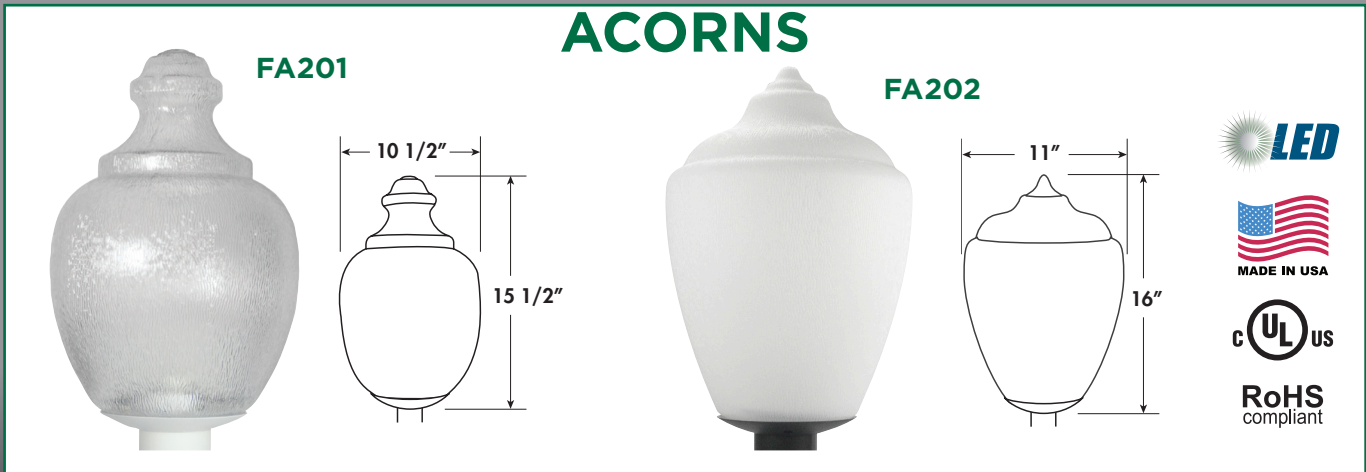

### EXAMPLE # FA201-G13-BCL

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
<b>FA201</b>	<b>EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE</b>	<b>W</b> -White <b>B</b> - Black	<b>ACRYLIC</b> <b>A</b> -Clear Textured <b>POLYCARBONATE</b> <b>C</b> -Clear Textured <b>POLYETHYLENE</b> <b>W</b> -White Textured	N/A
<b>FA202</b>	<b>LE800</b> - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt** <b>W</b> -900lm 3000K <b>C</b> -1000lm 4000K	<b>W</b> -White <b>B</b> - Black	<b>ACRYLIC</b> <b>A</b> -Clear Textured <b>POLYCARBONATE</b> <b>C</b> -Clear Textured <b>POLYETHYLENE</b> <b>W</b> -White Textured	<b>LED LAMP, 3 YEAR WARRANTY, DIMMABLE</b> <b>LW</b> -A19/E26, 2700K <b>LC</b> -A19/E26, 4000K
	<b>LE1200</b> - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt** <b>W</b> -1350lm 3000K <b>C</b> -1400lm 4000K			
	<b>LE1800</b> - 23W Power Input CRI 80 (TYP) >80 Lumens Per Watt** <b>W</b> -1850lm 3000K <b>C</b> -1900lm 4000K			
	<b>INCANDESCENT, MEDIUM BASE, 120V</b> <b>I150</b> -1 X 150W Max	<b>W</b> -White <b>B</b> - Black	<b>ACRYLIC</b> <b>A</b> -Clear Textured <b>POLYCARBONATE</b> <b>C</b> -Clear Textured <b>POLYETHYLENE</b> <b>W</b> -White Textured	
	<b>GU24 BASE, 120V</b> <b>G13</b> -1 X 13W <b>G18</b> -1 X 18W <b>G23</b> -1 X 23W <b>G26</b> -1 X 26W or 27W <b>G32</b> - 1 X 32W <b>G42</b> - 1 X 42W	<b>W</b> -White <b>B</b> - Black	<b>ACRYLIC</b> <b>A</b> -Clear Textured <b>POLYCARBONATE</b> <b>C</b> -Clear Textured <b>POLYETHYLENE</b> <b>W</b> -White Textured	<b>L</b> -CFL, 2700K

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\*ESTIMATED FROM LED SOURCE