

### Features

- Multifunction handshower offers full-coverage and targeted massage spray settings.
- Ergonomic design is comfortable and easy to grip.
- MasterClean™ sprayface resists hard water buildup for easy cleaning.
- 2.0 gpm (gallons per minute) flow rate.
- Contains flow-regulating check valve for backflow prevention.
- Bracket or slidebar required for wall-mount installation.

### Installation

- Deck-mount holder required for deck-mount installation.

### Water Conservation & Rebates

- WaterSense-labeled 2.0-gpm handshowers use up to 20 percent less water than standard 2.5-gpm handshowers while still meeting strict performance guidelines.
- This product can help a building earn Water Efficiency points in the LEED Green Building Rating System™.

### Required Accessories

K-8593 72" Shower Hose  
K-9514 60" Shower Hose



OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
OBC

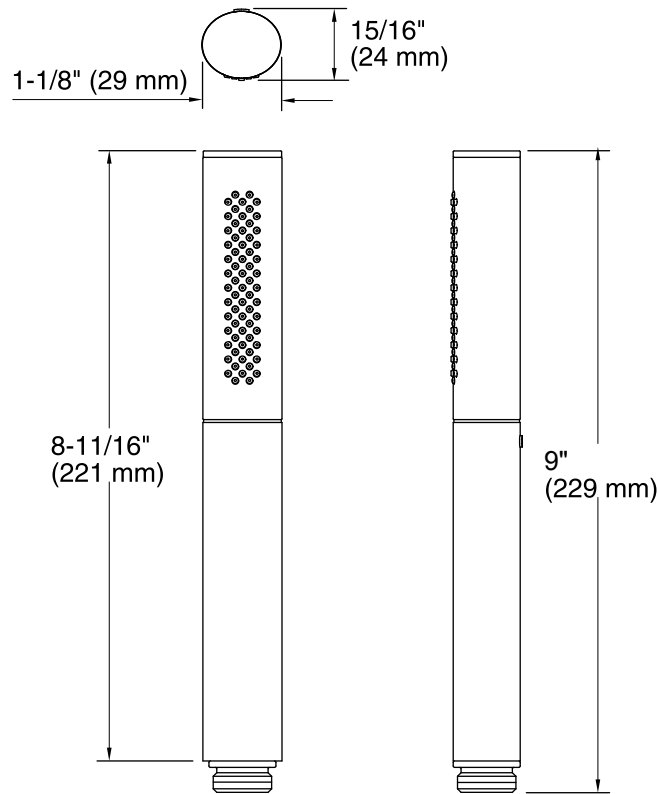
### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BGD	Vibrant® Moderne Brushed Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze
	BL	Matte Black
	RGD	Vibrant Rose Gold
	TT	Titanium

**Technical Information**

All product dimensions are nominal.

**Handshower:**

Rated maximum flow: 2 gal/min (7.6 l/min)

**Notes**

Install this product according to the installation guide.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials.

Note: Handshower contains flow regulating check valve for backflow prevention.

OBC compliant when installed to the specific requirements of these regulations.