



ZE1201-H_4

ELONGATED BARREL FITTING 41 [1042]
 EZCARRY® ADJUSTABLE HORIZONTAL HIGH PERFORMANCE
 SIPHON JET HUB AND SPIGOT WATER CLOSET CARRIER SYSTEM


SPECIFICATION SHEET

TAG _____

**PATENT
 PENDING**

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

ZE1201-HR4 Illustrated

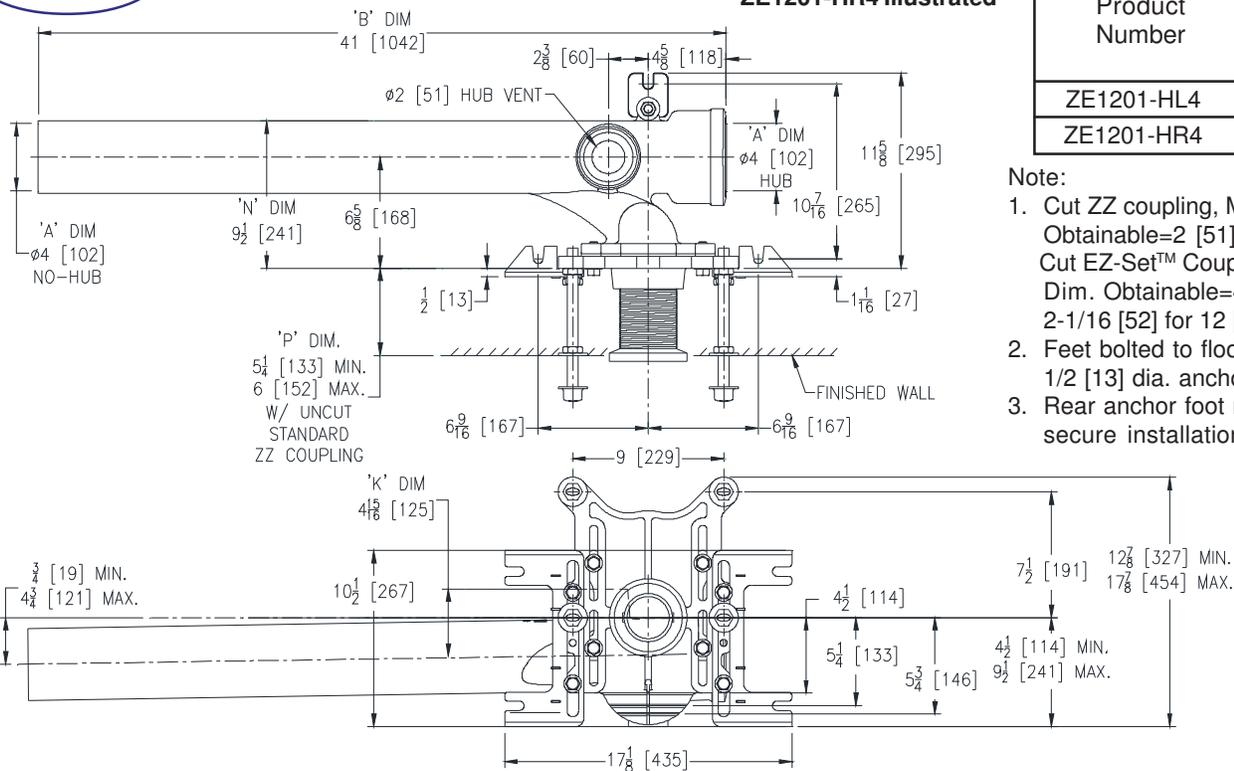

Product Number	Approx. Wt. lbs [kg]
ZE1201-HL4	91 [41]
ZE1201-HR4	

Note:

1. Cut ZZ coupling, Min. 'P' Dim. Obtainable=2 [51]. Cut EZ-Set™ Coupling, Min. 'P' Dim. Obtainable=4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT.
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.
3. Rear anchor foot required for secure installation.

ENGINEERING SPECIFICATION: ZURN ZE1201-H_4

EZCarry® horizontal siphon jet water closet carrier system, with high performance Dura-Coated cast iron main fitting with hydromechanically optimized sweeps, 4" [102 mm] hub & spigot connections, 38" [965 mm] barrel for stall to stall direct connection, and extended 2" [51 mm] vent. Corrosion resistant, adjustable 3" [76 mm] dia. X 6" [152 mm] coupling with integral test cap, designed to increase flow velocity and line carry, and labor saving "Neo-Seal" bonded gasket optimizes flow performance while reducing installation steps. Complete system includes an adjustable, gasketed faceplate; universal floor mounted foot supports; heavy-duty 1/2" [13 mm] rear anchor tie down; fixture bolts, trim, and stud protectors. EZCarry® narrow wall system complies with all applicable requirements of ASME A112.6.1M up to a 500 lbs [227 kg] maximum static load.

OPTIONS (Check/specify appropriate options)

- ____ ZE1201-HL4 4 [102] Hub & Spigot, Elongated Left Hand Inlet with Flow to Right
- ____ ZE1201-HR4 4 [102] Hub & Spigot, Elongated Right Hand Inlet with Flow to Left

PREFIXES

- ____ ZE D.C.C.I. System with Zurn ZZ Adjustable Coupling*
- ____ ZQE D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

- | | |
|---|---|
| ____ -A Auxiliary Support Assembly
(For 'P' Dim. Greater than 18 [457]) | ____ -F Floor Mounted, Back Outlet Fixture Support |
| ____ -CC Corrosion Resistant Cast Iron Coupling
(2-1/4 to 12 [57 to 305]) | ____ -G Galvanized Cast Iron |
| ____ -CE EZ-Set™ Coupling (NPSM 6 [152] ,12 [305] or custom)
(NPT 12 [305] or custom) | ____ -M Auxiliary Foot Support
(for 'P' Dim. 10 thru 18 [254 thru 457]) |
| ____ -CL Custom Length Standard Coupling with Integral Test Cap
(Specify Length 4, 8, 10, 12 [102, 203, 254, 305]) | ____ -RYK Unistrut Pre-Fab Foot Support |
| ____ -CS 2-1/4 [57] Polymer Coupling with Integral Test Cap
(ZZ Coupling Only) | ____ -RYK17 One Piece Unistrut Pre-Fab Foot |
| | ____ -VP Vandal-Proof Trim |
| | ____ -45 Finishing Frame for Siphon Jet System |
| | ____ -50 Flush Valve Supply Support for Water Closets |

* Regularly furnished unless otherwise specified.