

DC014-2G-A_DC018-2G-A

Ceiling Fixture & Pendant



Features

Housing

Die-formed Cold-rolled Steel

Finish Option: -62 Satin Nickel, -01 Polish Brass, -06 White, -30 Oil Rubbed Bronze

Optical

Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

Lamp


LED Type: Built-in (Color Temperature Option – 3000K, 3500K, 4000K, 5000K)

Certifications

ETL/cETL Listed

Warranty

5 Years Warranty on Driver and LED Module

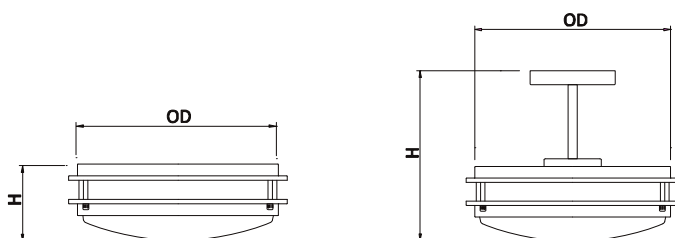

LED Type

Model	Input Voltage	Input Voltage	CRI	Lumen (Typ) / CT	Dimension (OD X H)	Energy Star
DC014D-2G-A-xxxxK	120V ~ 277V	23W	> 80	1980 / 3000K	14.8" x 4.6"	Yes
DC018D-2G-A-xxxxK	120V ~ 277V	35W	> 80	3100 / 3000K	17.8" x 4.8"	Yes

Pendant LED Type

Model	Input Voltage	Input Voltage	CRI	Lumen (Typ) / CT	Dimension (OD X H)	Energy Star
DC014D-2G-A-PD-xxxxK	120V ~ 277V	23W	> 80	1980 / 3000K	14.8" x 11.7"	Yes
DC018D-2G-A-PD-xxxxK	120V ~ 277V	35W	> 80	3100 / 3000K	17.8" x 11.9"	Yes