Pfister

Specifications

• 1.8 GPM Flow Rate (Handheld)

• Requires OX6-44OR Rough-In

Features

• Fixed Hubs

4-Hole Installation All Metal Construction

Pforever Warranty[®]

Arterra™

Roman Tub Trim

LG6-4DEC Finish(C) □ LG6-4DED Finish(D) □ LG6-4DEK Finish(K) □ LG6-4DEY Finish(Y) □




- 4-Hole Installation
- Trim Only, Valve Not Included

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- Cal Green Compliant
- CEC Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)

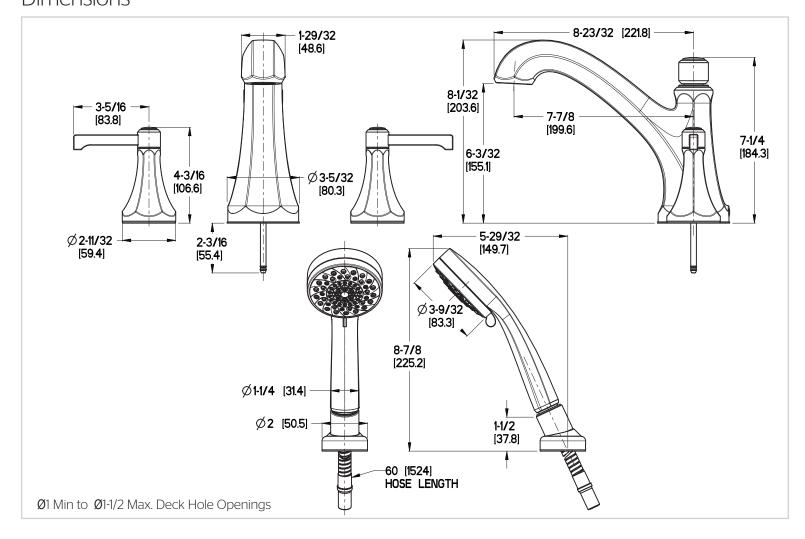

Dimensions

12186-11

Copyright © 2017, Pfister Inc.