

SPECIFICATIONS



FNW7817 PIPE SUPPORT



METRIC CUSHIONED STRUT CLAMP

FEATURES

- Made in the USA
- UL Classified 2043 (25/50) for use in plenums and air handling systems
- Specified MSS-SP 58 Type 60 and Type 61
- Clamps are 1008-1010 carbon steel
- Eliminate shock and vibration
- Projection welded studs
- Nylon insert locknut
- UV resistant
- Resist most fuels, oils, gases, greases, solvents, mineral acids and other harsh materials
- Allow fluid conductors to be added or removed from installations without disturbing adjacent lines
- Assembled or disassembled with a single hand or power wrench for fast and simple installation
- Permit various size lines to be mixed to suit installation
- All metal components have trivalent (non-hex) plating
- Available in 304 (S4) and 316 (S6) stainless steel, as well as aluminum (special order)
- Available for metric sizes from 6mm to 200mm
- Cushion material made with high-strength thermoplastic elastomer (TPE)
- Temperature rating: -65°F to 275°F (-53°C to 135°C)

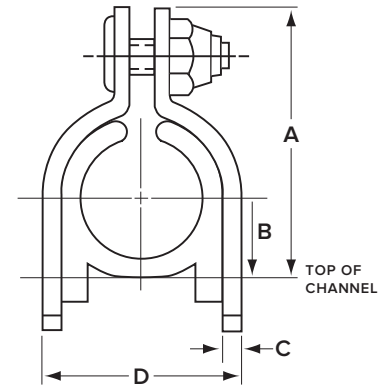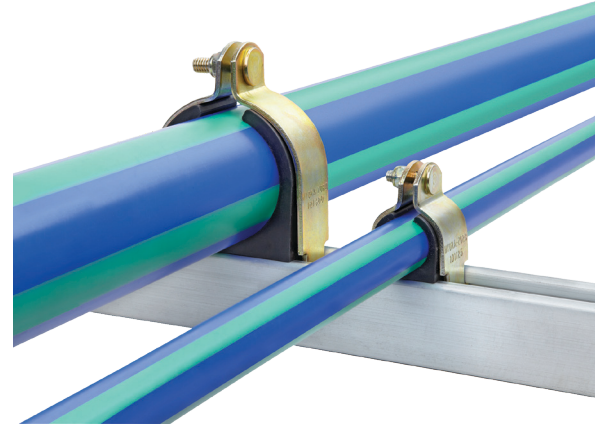

USE RECOMMENDATIONS

- Clamps should be spaced no more than 60 inches apart or a maximum of 5 feet
- All tube, pipe and hose lines are to be secured with clamps and anchoring channel or other similar approved equal method
- Only one man and one tool needed for assembly after base channel is in place

FNW strut mounted cushion clamp assemblies include strut clamps with welded fastener, cushion and locknut.

Catalog Number	Clamp ID	Bolt Size		Dimensions (in.)				Dimensions (mm)				Weight	
	Tube OD	in.	mm	A	B	C	D	A	B	C	D	lbs	kg
FNW7817YMM20	20mm	1/4	6	1.78	0.53	0.07	1.33	45	13	2	34	0.1946	0.0883
FNW7817YMM25	25mm	1/4	6	2.03	0.66	0.07	1.66	52	17	2	42	0.2908	0.1319
FNW7817YMM32	32mm	1/4	6	2.30	0.78	0.07	1.92	58	20	2	49	0.3265	0.1481
FNW7817YMM40	40mm	5/16	8	2.75	0.91	0.11	2.22	70	23	3	56	0.477	0.2164
FNW7817YMM50	50mm	5/16	8	3.28	1.16	0.11	2.72	83	29	3	69	0.5022	0.2278
FNW7817YMM63	63mm	5/16	8	4.03	1.53	0.11	3.47	102	39	3	88	0.6006	0.2724
FNW7817YMM75	75mm	5/16	8	4.52	1.78	0.11	3.97	115	45	3	101	0.6192	0.2809
FNW7817YMM90	90mm	3/8	10	4.91	1.97	0.11	4.36	125	50	3	111	0.7205	0.3268
FNW7817YMM110	110mm	3/8	10	5.76	2.44	0.11	5.30	146	62	3	135	0.95	0.4309
FNW7817YMM125	125mm	3/8	10	6.55	2.71	0.11	6.15	166	69	3	156	1.165	0.5284
FNW7817YMM160	160mm	3/8	10	7.95	3.41	0.11	7.70	202	87	3	196	1.3	0.5897