



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

LED Cloud LCL Series

Features

This clean appearance, surface mounted cloud provides a wide distribution of light with a white diffuser. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).

Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

Finish

Housing is finished in lighting grade white baked gloss enamel paint.

Diffuser

White acrylic diffuser.

Electrical

Direct wired with a constant current low voltage electronic LED driver rated at 120 VAC. The driver is dimmable with a 2-wire (Triac) or electronic low voltage (ELV) dimmer switch.

Lamping

50,000 hr. long life replaceable LEDs produce 3000, 4100 or 5000 source lumens. 3000K or 4000K color temperature, 90 CRI.

Certification

cETLus listed for damp locations.


ENERGY STAR® Qualified

*Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions subject to change without notice.

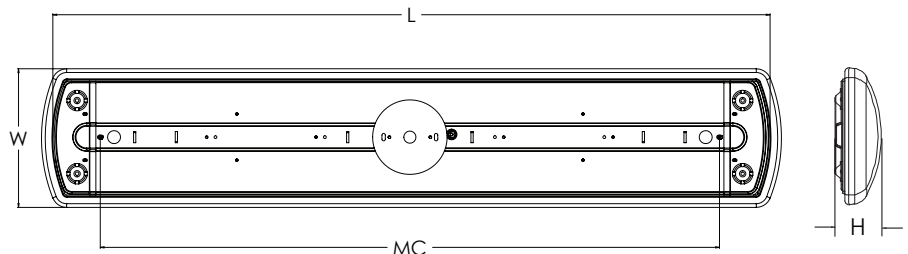

Ordering Information:

Warm White	LED	Source Lumens	CCT	L	W	H	MC
LCL3000L30D1	36W	3000	3000K	49-3/4"	9-3/8"	3-1/4"	41-1/2"
LCL4100L30D1	52W	4100	3000K	49-3/4"	9-3/8"	3-1/4"	41-1/2"
LCL5000L30D1	60W	5000	3000K	49-3/4"	9-3/8"	3-1/4"	41-1/2"
Cool White	LED	Source Lumens	CCT	L	W	H	MC
LCL3000L40D1	36W	3000	4000K	49-3/4"	9-3/8"	3-1/4"	41-1/2"
LCL4100L40D1	52W	4100	4000K	49-3/4"	9-3/8"	3-1/4"	41-1/2"
*LCL5000L40D1	60W	5000	4000K	49-3/4"	9-3/8"	3-1/4"	41-1/2"

