



HEAVY DUTY FREESTANDING TUB SUPPLY

INSTALLATION INSTRUCTIONS

Before you begin, read the installation instructions below. Observe all local plumbing and building codes.

For the following installation instructions for your new tub supplies it is assumed that the water supply lines are in place underneath the floor and are directly accessible for installation.

Unpack and inspect for any shipping damages. If you find any damages, do not install. Contact Customer Service at 1-866-855-2284. If you need assistance while installing your tub supplies, call our Customer Service number.

We recommend consulting a professional if you are unfamiliar with installing bathroom fixtures and plumbing. Signature Hardware accepts no liability for any damages to the floor, walls, plumbing or personal injury during installation.

Riser location will vary depending on the width of the faucet centers and tub rim. We recommend that the spout of your faucet extend out approximately 3-5" over the interior of the tub.

TOOLS AND MATERIALS:


Adjustable Wrench Damp Cloth

INSTALLATION

1. Thread the bell flanges (**F**), lock nuts (**G**), and rubber washers (**H**) onto the lower riser pipes (**E**). Insert the lower riser pipes into the installation holes in the finished floor.

Note: Apply the supplied thread sealant to all threaded connections. Wipe away any excess sealant with a damp cloth.

2. Thread the metal washers (**I**), and locknuts (**J**) onto the lower riser pipes via the under the floor access space. Connect the lower riser pipes to the main water supply with the rubber washers (**K**) and NPT adapters (**L**).
3. Above the floor, apply thread sealant to the riser threads and connect the shutoff valves (**D**). Wipe away any excess sealant with a damp cloth.
4. Slide the slip nuts (**B**) up the upper riser pipes (**C**).
5. Wrap plumber's tape around the threads on the bottom of the upper riser pipes and thread into the shutoff valves.
6. Place the remaining rubber washers (**A**) in the slip nuts at the top of the supply pipes and install the tub faucet according to the faucet installation instructions.

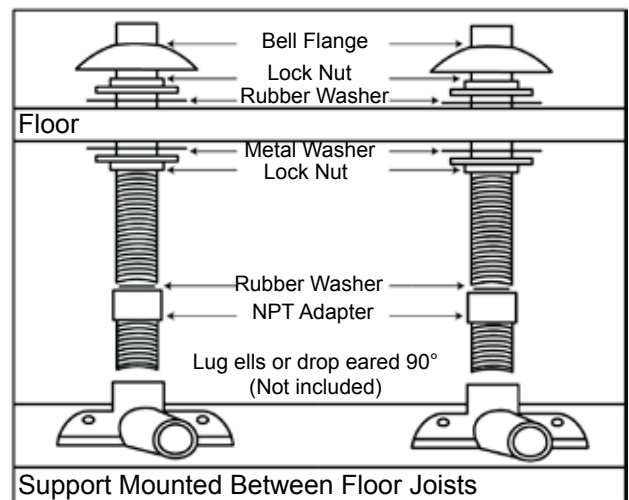



PARTS LIST:

- A. (2) Rubber Washer
- B. (2) Slip Nut
- C. (2) Upper Riser Pipe
- D. (2) Straight Stop Valve
- E. (2) Lower Riser Pipe
- F. (2) Bell Flange
- G. (2) Lock Nut
- H. (2) Rubber Washer
- I. (2) Metal Washer
- J. (2) Lock Nut
- K. (2) Rubber Washer
- L. (2) NPT Adapter

