


BRIZO®

VALVE W/ INTEGRATED DIVERTER TRIM

- Vettis® Bath Collection
- Valve Trim with Three Function Diverter (T75P588)
- Valve Trim with Six Function Diverter (T75P688)

Submitted Model No.: _____

Specific Features: _____

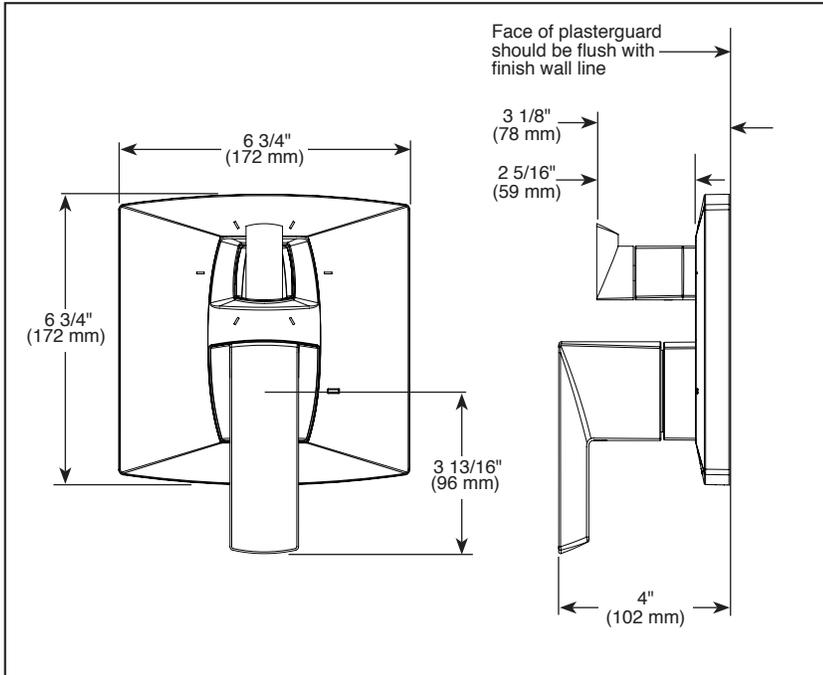


FEATURES:

- Pressure balance valve cartridge


STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal integrated shower diverter rough valve body (R75000 Series)
- Max. system flow rate 5.0 gpm at 60 psi with R75000
- Back-to-back installation capability
- Top handle controls diverter functions
- Bottom handle controls on/off and temperature
- Field adjustable to limit bottom handle rotation into hot water zone
- Bottom handle 120° Maximum rotation
- Red/Blue temperature markings
- Three function diverter (T75P588▲) has 2 individual positions and 1 shared position
- For two individual functions, no shared functions, order additional RP72123
- Six function diverter (T75P688▲) has 3 individual positions and 3 shared positions
- For three individual functions, no shared functions, order additional RP72124
- 1/2" rough-in
- Cartridges included
- Standard installation allows up to 1-1/8" finished wall thickness
- For thick wall installations, RP91024 AND RP92548 can be ordered to allow for up to 2-1/8" finished wall thickness. Both RP kits required.

RP91024 Valve Trim Extension Kit

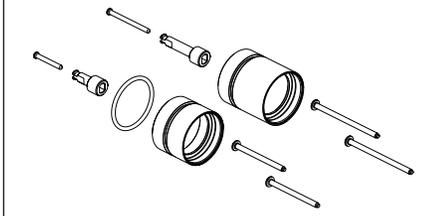

RP92548 Diverter Trim Extension Kit

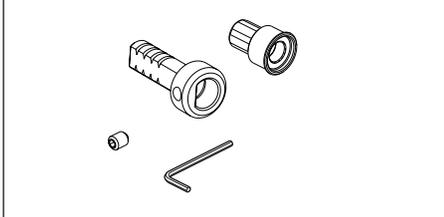

▲ Designate Proper Finish Suffix

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
-  Indicates compliance to ICC/ANSI A117.1