

INSTALLATION INSTRUCTION FOR FIXTURE #3076-613

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from wall. Including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Put the arm(Q) and metal circle(R) in the right direction. Joint the quick connector (P) and put the joint connector(P) with extra wire into the hole of the metal circle(R);then securing with screws(O) to the metal circle(R) through the holes of the metal sheet at the end of the arm(Q).
4. Use proper chain pliers to open one end link of the chain (H) and connect to the small loop (I). Then close the link.
5. By measuring, determine the correct number of links needed for the desired hanging height. Using the chain pliers, disconnect and discard the remaining chain.
6. Open the other end link of the chain (H) and connect to small loop (D). Then close the link.
7. Carefully lace the fixture wires through the chain (H).
8. Feed the fixture wires through the small loop (D) and canopy (F) and pull tight.
9. Attach the mounting bar (C) to the outlet box using the outlet box screws (B). The side of the mounting plate marked "GND" must face out.
10. Follow the wiring instructions carefully (See Fig.2).
11. Attach the fixture canopy (F) over the mounting bar (C) by protruding the nipple (A) through the mounting holes on the canopy (F) and securing with ball nut (G) tightly.
12. Put the glass shade (L) over the socket (M) and secure with socket ring (J).
13. Install the bulb (not included) in accordance with fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

CONNECTING THE WIRES (FIG. 2)

1. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting strap using the green screw provided.
2. Tuck the wire connections neatly into the wall outlet box.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1


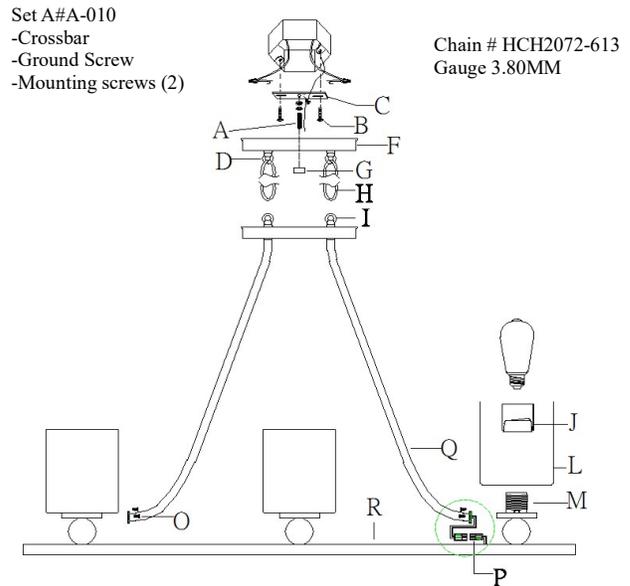


Fig.2



Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

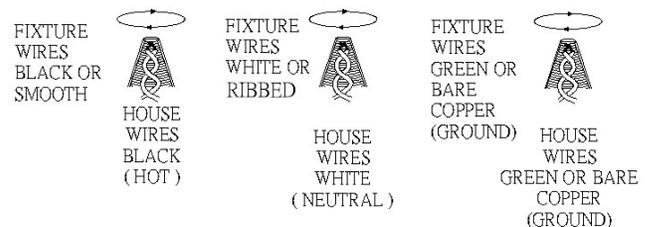

american
lighting
association