



Commercial Gas Water Heaters

FORCE™ 90 POWER VENT

The Force™ 90 is a light-duty, power vent, fully condensing commercial gas water heater with an internal helical heat exchanger. This helical heat exchanger helps the Force 90 achieve 94% thermal efficiency and deliver outstanding hot water output.

POWER VENT DESIGN FOR INSTALLATION VERSATILITY

- Modular blower, with 120 volt, 60Hz electrical system (5 amps or less), 6-foot cord with standard 3-prong connector
- Combined vertical and horizontal runs terminating through an outside wall, using Schedule 40 PVC, CPVC, ABS, or polypropylene pipe as follows:
 - 2" pipe allows vent runs up to 25 equivalent feet
 - 3" pipe allows vent runs up to 65 equivalent feet
 - 4" pipe allows vent runs up to 128 equivalent feet

HIGH OUTPUT WITH SMALL FOOTPRINT

- 22" diameter, combined with 94% efficiency, 50-gallon tank and 76,000 BTU input means Force 90 can be installed in less space than a larger 75-gallon unit, with equal or better performance.
- Total height is 71-1/8" to top of blower outlet

SIDE-MOUNTED TAPS FOR RECIRCULATING SYSTEMS

- Hot and cold side taps allow Force 90 to be used for combination systems for water heating plus space heating, radiant floor heating or other applications requiring a recirculating hot water loop.

BLUE DIAMOND® GLASS COATING WITH TWO HEAVY DUTY ANODE RODS

- Provides superior corrosion resistance compared to industry standard glass lining

INTELLI-VENT™* GAS CONTROL WITH SILICON NITRIDE HOT SURFACE IGNITOR

- Premium-grade hot surface ignitor eliminates standing pilot
- Electronic circuitry provides superior system diagnostics capabilities plus extremely precise temperature control

GREEN CHOICE® GAS BURNER

- Patented eco-friendly burner design reduces NOx emissions by up to 33% and complies with Low-NOx emission requirements of less than 40 ng/J

SELF-CLEANING DIP TUBE

CSA CERTIFIED AND ASMERATED T&P RELIEF

VALVE MAXIMUM HYDROSTATIC WORKING PRESSURE: 150 PSI

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/ IENSA 90.1

3-YEAR LIMITED TANK AND 1-YEAR LIMITED PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheater.com

*Intelli-Vent™ is a registered trademark of Emerson Electric Company



SERIES 130



SOLID. STATE.



Commercial Gas Water Heaters

Model Number	Gallon/Liter Capacity	Recovery @ 90°F Rise Gallon Per Hour	BTU Input Per Hour	Dimensions in Inches										Approx. Shipping Weight (lbs)
				A	B	C	D	E	F	G	H	J	K	
SHE50 76NE	50/189	95	76,000	71	68 3/4	51 7/8	20 7/8	9-1/8	12	22	8	15-3/4	27	225

Available in natural gas only.



Top inlet and outlet connections: 3/4" male NPT.

Circulation loop connections: 3/4" female NPT.

Standard model certified for sea level to 5,300 ft. elevation. Order SMR K30 for elevations to 10,100 ft.

Optional Condensate Neutralizer Kit available (Part Number 100112380).

Model Number	Temperature Rise	Recovery Capacities												
		°F	30	40	50	60	70	80	90	100	110	120	130	140
		°C	17	22	28	33	39	44	50	56	61	67	72	78
SHE50 76NE	GPH		286	215	172	143	123	107	95	86	78	72	66	61
	LPH		1084	813	651	542	465	407	361	325	296	271	250	232

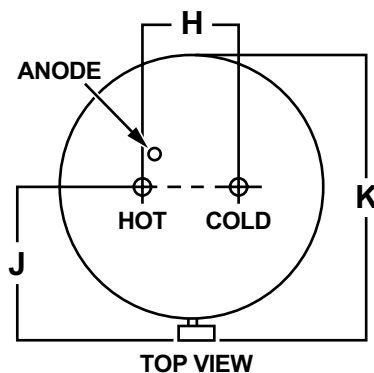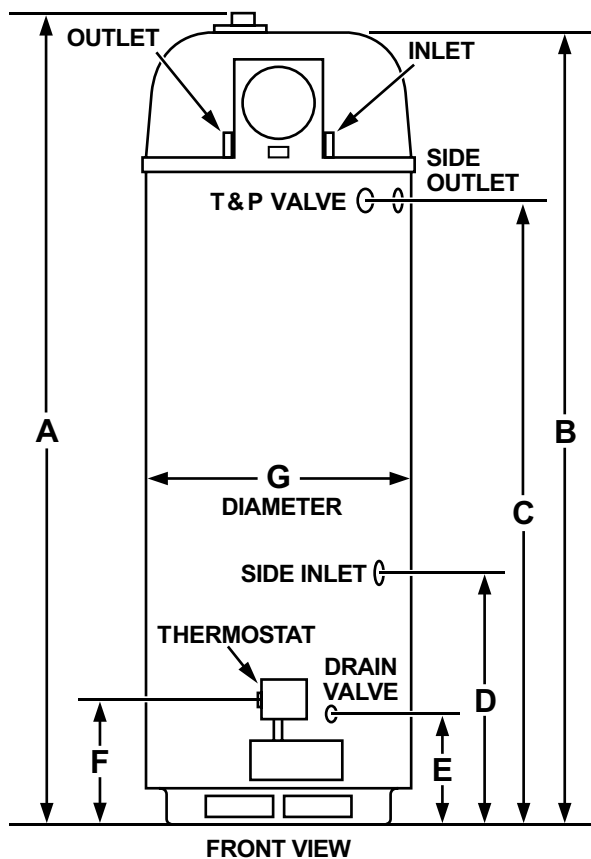

* INSTALL IN ACCORDANCE WITH LOCAL CODES

FOR MORE INFORMATION ON SELECT® CONTACT: STATE WATER HEATERS 500 TENNESSEE WALTZ PARKWAY, ASHLAND CITY, TN 37015 • 800-365-0024 TOLL-FREE USA • STATEWATERHEATERS.COM