

STUDIO® 60"x 30" BATHING POOL with FOLD OVER EDGE

HIGH GLOSS ACRYLIC

STUDIO® 60" x 30" BATHING POOL with FOLD OVER EDGE

2973.112 BATHING POOL
Right Drain

☐ 2973.212 BATHING POOL

Product Features:

- High-gloss acrylic with fiberglass reinforcement for durability
- Fold Over Edge apronless design allows for a custom finish to the tub apron
- Integral three-sided, 1" tiling/water retention flange helps prevent water seepage
- Remodel-friendly size fit standard alcove or new construction
- For recess installation
- Pre-leveled tub bottom for easier installation
- Integral lumbar support provides extra comfort
- A wide and deep bathing well provides maximum bathing space
- Spaciously designed to provide maximum bathing space with a wide and deep bathing well
- A textured floor helps to improve safety
- Coordinates with other Studio suite fixtures and fittings to complete a full suite
- Arctic White finish (.011)
- Limited Lifetime warranty

Nominal Dimensions:

60" x 30" x 18" (1524 x 762 x 457mm)

Compliance Certifications - Meets or Exceeds the Following Specifications:

- CSA B45.5/ IAPMO Z124
- cUPC

To Be Specified - Required Bath Faucet*: Faucet Finish: Drain*: Drain Finish:	
☐ Faucet Finish: ☐ Drain*:	

*See American Standard faucet and drain section of Product Selector

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES-CHECK LOCAL CODES. INSTALL WITH SEAT AT HEAD END.




SEE REVERSE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS



STUDIO® 60"x 30" BATHING POOL with FOLD OVER EDGE

HIGH GLOSS ACRYLIC

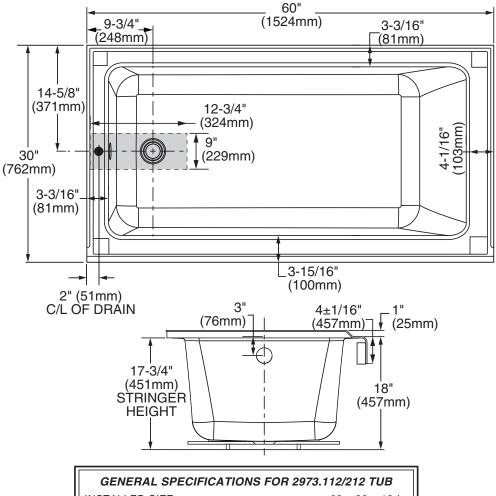

GENERAL SPECIFICATIONS FOR 2973.112/212 TUB	
INSTALLED SIZE	60 x 30 x 18 ln.
	(1524 x 762 x 457mm)
WEIGHT	46 Lbs. (21 Kg)
WEIGHT w/WATER	447 Lbs.(203 Kg)
GAL. TO OVERFLOW	48 Gal. (181 L)
BATHING WELL AT SUMP20-1/2	2 x 44.5 ln. (521 x 1130mm)
BATHING WELL AT RIM	.23 X 53 In.(584 x 1346mm)
WATER DEPTH TO OVERFLOW	12 In. (305mm)
FLOOR LOADING 36	Lbs./Sq.Ft. (175 Kgs/Sq.m)
(PROJECTED AREA)	
PTS	10.18
CUBE (FT ³)	25.12

NOTES:

BATH TO BE INSTALLED ABOVE FLOOR LINE AS A RECESS INSTALLATION.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH TUB FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard CSA B45.5-11/IAPMO Z124-2011. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.