

Specifications

PF4001

ACCUFIT® Pressure Balance Tub and Shower Faucet Valve with Stop



Product Features

- ACCUFIT® Pressure balance valve with integral stops
- One-piece cartridge design for ease of maintenance
- Ceramic disc valve cartridge
- Back-to-back capability
- Cast bronze valve body
- Optional air test cap available
- Adjustable temperature limit stop
- IAPMO Approved
- Quick remove plaster guard
- Easy mounting brackets
- Meets or exceeds ASSE 1016-P standards (anti-scald)

Model Numbers

- PF4001** Ceramic disc tub and shower valve with stops
1/2" MIP and SWT connections
- PF4001C** Ceramic disc tub and shower valve with stops
CPVC connections
- PF4001F** Ceramic disc tub and shower valve with stops
FIP connections
- PF4001P** Ceramic disc tub and shower valve with stops
ASTM F1807 crimp PEX connections
- PF4001WP** Ceramic disc tub and shower valve with stops
ASTM F1960 cold expansion PEX connections



PF4001

Available Parts

- ACF4001AIR** Air test cap
- ACF4001EXTBG** Deep rough extension kit BG
- ACF4001EXTCP** Deep rough extension kit CP
- ACF4001EXTMB** Deep rough extension kit MB
- ACF4001EXTORB** Deep rough extension kit ORB
- ACF4001EXTPN** Deep rough extension kit PN
- ACF4001EXTZBN** Deep rough extension kit BN
- ACF4001GRD2** Plaster guard
- ACF4001STOP** Stop valve
- ACF4001UCRT** Replacement cartridge assembly

Flow Rates (Gallons per minute)

Pressure (psi)	20psi	40psi	60psi	80psi
Rate (gpm)	3.17	4.49	5.55	6.34

All product traffic data is an average.

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO faucet carries a limited lifetime warranty when installed in residential applications. The warranty is five years in commercial applications. This product meets ASME A112.18.1/CSA B125.1 and ASSE 1016-P.



FERGUSON.COM/PROFLO

Specifications


PF4001

ACCUFIT® Pressure Balance Tub and Shower Faucet Valve with Stop



Product Specifications

	A (in)	A (mm)
PF4001	4-7/8	124
PF4001C	6	152
PF4001F	4-7/8	124
PF4001P	6-1/8	155
PF4001WP	6-3/8	162

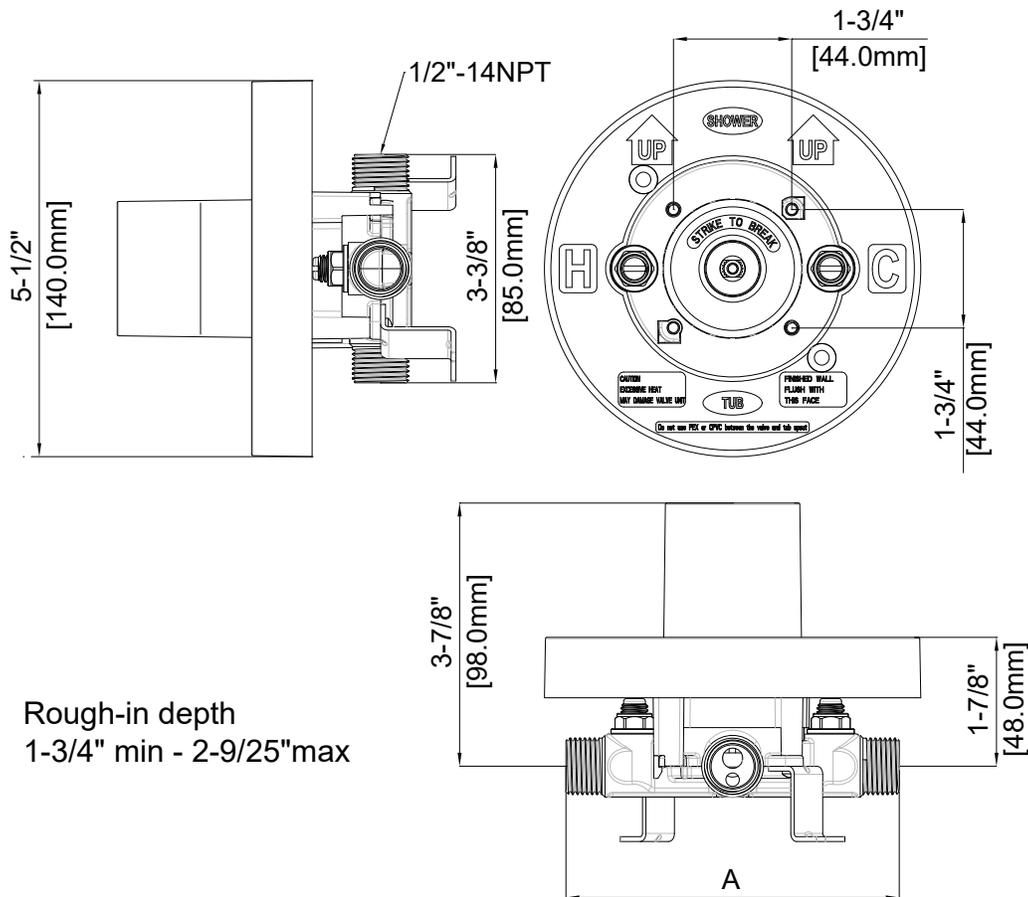

Rough-in depth
1-3/4" min - 2-9/25"max

Important Note

Pressure Balancing Valves, regardless of brand, are generally not recommended for use with tankless (on-demand) water heaters. Pressure Balancing Valves adjust to the lowest incoming water pressure. Because outgoing hot-water pressure of tankless water heaters can sometimes be significantly lower than household cold-water pressure, the result can be unsatisfactory water pressure in the shower.