PF4001LS/PF4001CLS/PF4001FLS/ PF4001PLS/PF4001WPLS ACCUFIT® PRESSURE BALANCE TUB AND SHOWER FAUCET VALVE WITH STOP



Product Features

- · ACCUFIT® Pressure balance valve with integral stops
- · One-piece cartridge design for ease of maintenance
- · Ceramic Disc Cartridges
- · Back-to-back capability
- · Forged brass valve body
- · Optional air test cap available
- · Adjustable temperature limit stop
- · Quick remove plaster guard
- · Easy mounting brackets

Optional Parts

ACF4001AIR Air test cap

ACF4001EXT* Deep rough extension kit

ACF4001GRD2 Plaster guard ACF4001STOP Stop valve

ACF4001UCRT Replacement cartridge assembly



PF4001LS

Codes and Certifications



- · Certified to ASME A112.18.1 / CSA B125.1
- · cUPC/IAPMO listed
- · Meets or exceeds ASSE 1016-P standards (anti-scald)

Product Specifications

PF4001LS Ceramic disc tub and shower valve without

stops MIP and SWT

PF4001CLS Ceramic disc tub and shower valve without

stops CPVC connection

PF4001FLS Ceramic disc tub and shower valve without

stops FIP

PF4001PLS Ceramic disc tub and shower valve without

stops PEX ASTM F1807 crimp connector

PF4001WPLS Ceramic disc tub and shower valve without

stops PEX ASTM F1960 Uponor (Wirsbo)

connector

Flow Rates (Gallons per minute)


Pressure (psi)	20 psi	40 psi	60 psi	80 psi
Rate (gpm)	3.46	5.02	6.34	7.26

For detailed warranty information, visit ferguson.com/proflo-faucet-warranty.

PF4001LS/PF4001CLS/PF4001FLS/ PF4001PLS/PF4001WPLS ACCUFIT® PRESSURE BALANCE TUB AND SHOWER FAUCET VALVE WITH STOP



	A (in)	A (mm)
PF4001LS	3-3/8	85
PF4001CLS	4-7/16	113
PF4001FLS	3-3/8	85
PF4001PLS	4-9/16	116
PF4001WPLS	4-13/16	123

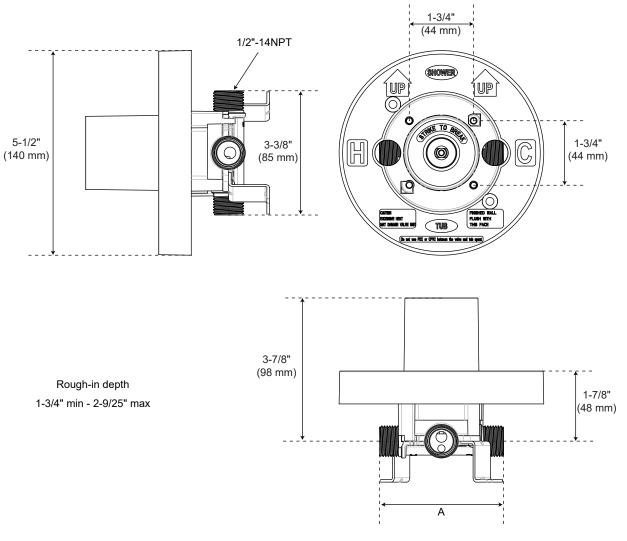

For detailed warranty information, visit ferguson.com/proflo-faucet-warranty.