

VILAMONTE 4-HOLE ROMAN TUB FAUCET AND HAND SHOWER

SKU: 948686

Code: SHVL4RTG, SH674164



FEATURES

Material: Metal construction for strength and durability

Installation Type: Deck Mount

Flow Rate: 18.3 gpm (69.8 L/min) @ 80 psi

Hand Shower Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

Spray Type: Full

Cartridge Type: Ceramic Disc

Swivel Spout: No

Required for Installation: Rough-in valve: SH674164

ASME A112.18.1/CSA B125.1, WaterSense by IAPMO, LISTED ID: SHVL4RTG*, SH674164



ADDITIONAL FEATURES


- 4-hole installation.
- Hand shower max. flow rate: 1.8 gpm (6.8 L/min) @ 80 psi.
- Lift rod diverter to handshower.
- Handshower includes factory installed backflow prevention check valve.
- Optional rough-in valve:
 - Brass coupling nut.
 - Accommodates an 8" - 16" faucet's spread.
 - Deck thickness max. 1.5" or screws can be removed to accommodate thicker deck installations up to 2".

REVISED 5/15/2024

VILAMONTE 4-HOLE ROMAN TUB FAUCET AND HAND SHOWER

SKU: 948686

Code: SHVL4RTG, SH674164

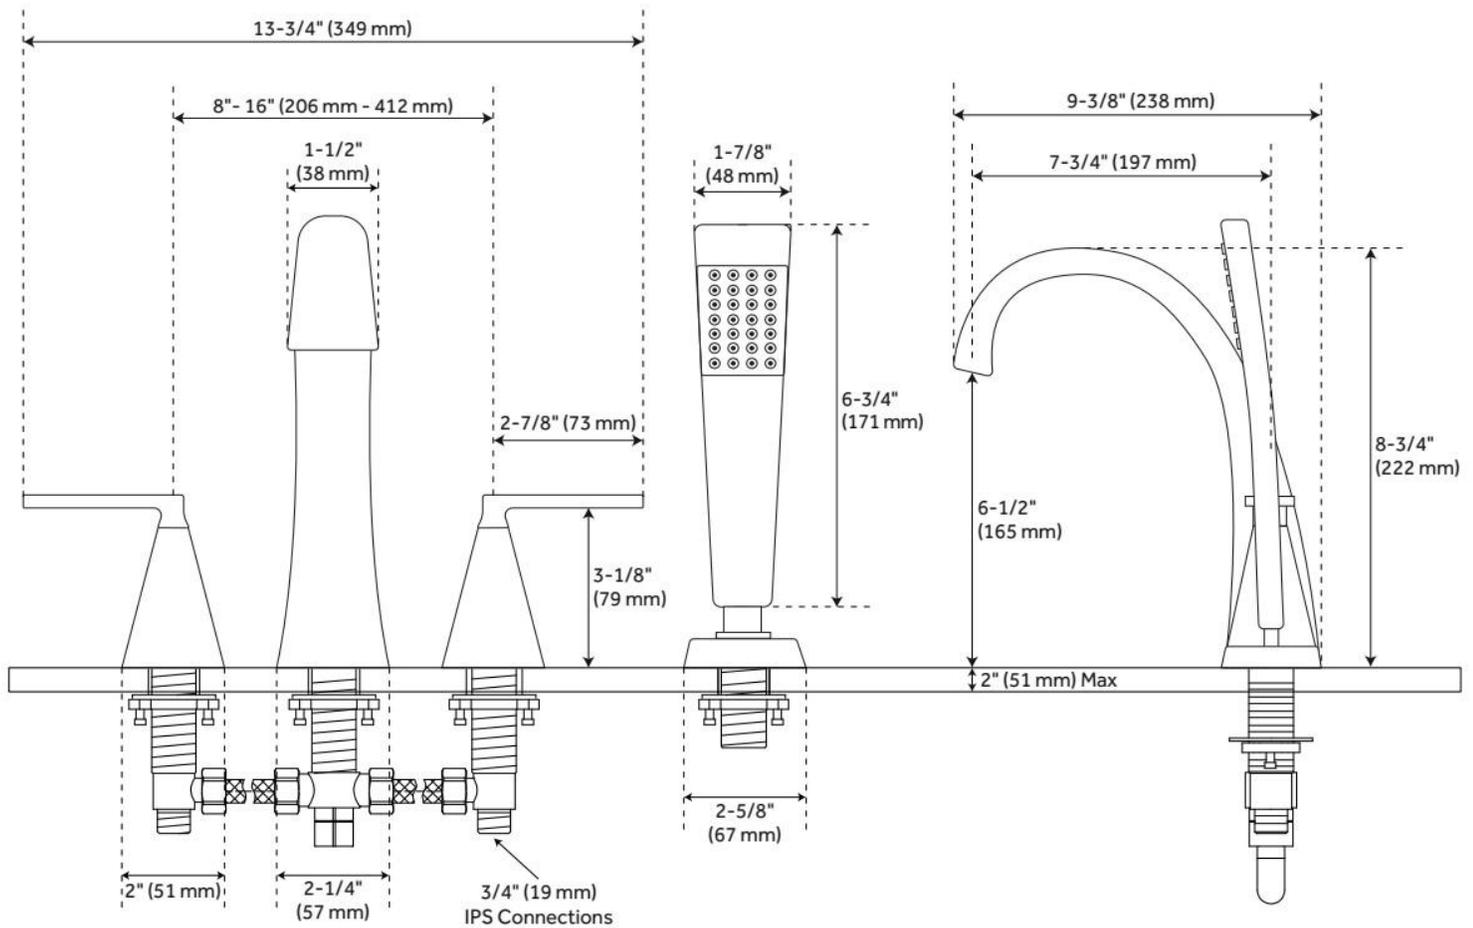

REVISED 5/15/2024

4-HOLE ROMAN TUB FAUCET ROUGH-IN VALVE

SKU: 448005
Code: SH674164

FEATURES

Installation Type: Deck Mount



ASME A112.18.1/CSA B125.1, Massachusetts Accepted, LISTED ID: SH674164




ADDITIONAL FEATURES

- Compatible with Beasley, Carraway, Provincetown, St. Martin and Vilamonte 4-Hole Roman Tub Faucets.
- 4-Hole Installation.
- Brass coupling nut.
- Faucet can be installed with variable centers from 8" - 16".

REVISED 5/15/2024

4-HOLE ROMAN TUB FAUCET ROUGH-IN VALVE

SKU: 448005
Code: SH674164

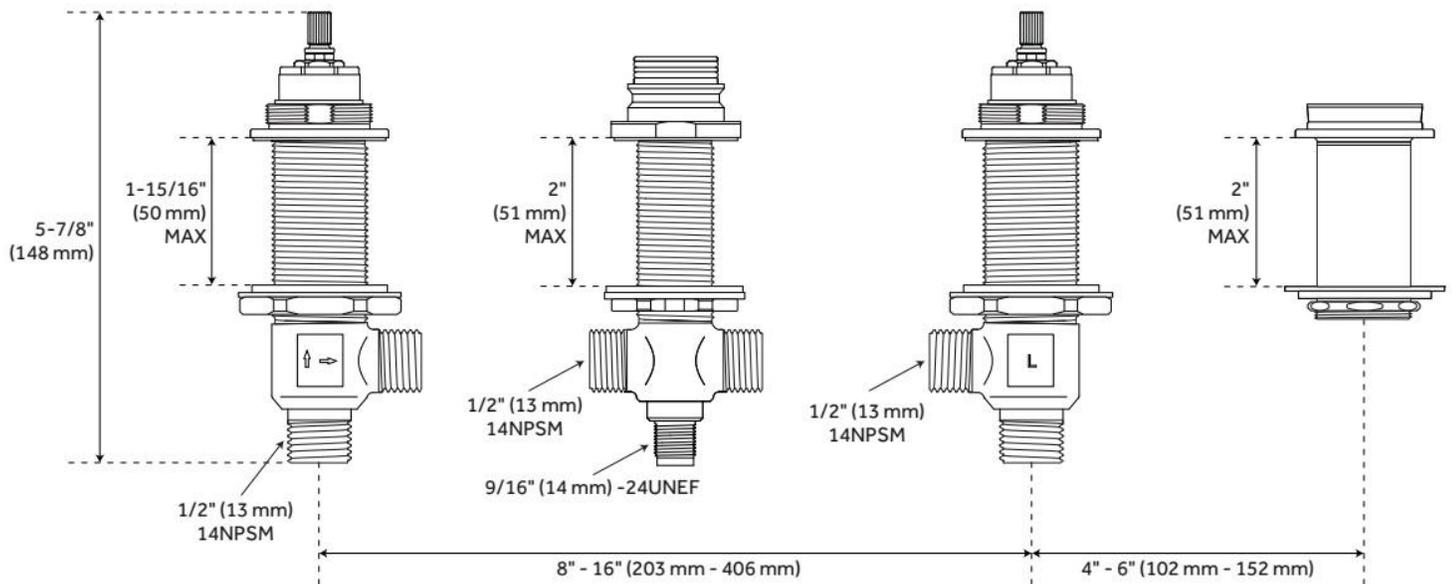

REVISED 5/15/2024