

Braeburn®

7205

Up to 3 Heat / 2 Cool Heat Pump
Up to 2 Heat / 2 Cool Conventional
Smart Wi-Fi Universal Thermostat

BlueLink
smart connect



Phone not included.

Wi Fi

5 YEAR
LIMITED
WARRANTY

Thermostat Features

- 7 Day, 5-2 Day or Non-Programmable
- Large 3 sq. in. Backlit Display
- Bright Blue Backlight
- Auto or Manual Changeover
- User and Installer Lock Modes
- SmartLimit™ Temperature Limits
- Auxiliary Heat Fossil Fuel Option
- Hardwire or Battery Powered
- Circulating Fan Mode
- Wi-Fi works without common (C) wire on most systems; requires common on Heat Pump, Heat Only or Cool Only Systems

Application Features

- Compatible with Virtually All Smartphones, Tablets or PC's
- Multi-Color Program Groups Simplify Scheduling
- Text and E-Mail Service and Temperature Alerts
- BlueLink QuickCopy Allows User to Duplicate Program and Configuration to Other Thermostats
- QuickEdit® Makes Schedule Changes Easy
- BlueLink SmartData® Energy Report Capability
- Monitor and Control Multiple Thermostats
- Easy Access Dealer Information
- Help Screens Guide User Through Application

FREE Color Contractor Branding!
Visit braeburnonline.com




www.bluelinksmartconnect.com

Toll-Free 866.268.5599 (U.S.) +1.630.844.1968 (Outside the U.S.)

BlueLink Smart Connect® Application Screens

Multi-Color Program Groups

Simplifies program scheduling by allowing user to group days and walk through programming set points, times and temperatures quickly and easily.

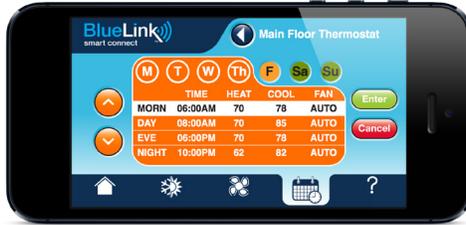

BlueLink SmartData® Energy Reports

Gives the user the capability of retrieving usage data for individual thermostats for specific time periods.



BlueLink QuickCopy Feature



Service and Temperature Alerts



Service Dealer Information



Product Specifications

Dimensions:	3.70" x 5.16" x 1.38"
Electric Rating:	24 Volt AC (18-30 Volt AC) 1 amp maximum load per terminal 5 amp total maximum load (all terminals)
AC Power:	18-30 Volt AC
DC Power:	3.0 Volts DC (2 "AA" Alkaline batteries included)
To Use Wi-Fi:	Wi-Fi works without common (C) wire on most systems; requires common on Heat Pump, Heat Only or Cool Only Systems
Compatibility:	Heat pump systems up to 3 heat/2 cool, Conventional systems up to 2 heat/2 cool
Wi-Fi Communication:	802.11
Control Range:	45° to 90° F (7° to 32° C)
Display Range:	40° to 99° F (5° to 37° C)
Accuracy:	+/- 1° F (+/- .5° C)
Terminations:	Rh, Rc, C, W2, W1/E/W3, O/B, G, Y2, Y1, K

Shipping Information

INDIVIDUAL CARTON
Dimensions: 4.5" x 5.75" x 2.25"
Weight: 1.0 lbs.

MASTER CARTON
Quantity: 3
Dimensions: 7.15" x 6" x 4.7"
Cubic Feet: .14
Weight: 3.25 lbs.

Braeburn 7205 Replaces*

Honeywell® TH8732WF, TH6220WF	Pro1® T855i, T701i
Emerson® 1F86U-42WF	Nest® T100577, T200577, T3007ES

*Verify specific application requirements. All trademarks are the property of their respective owners.

Accessories

7340 Share-a-Wire® Module	2920 Vertical J-Box Adapter Wall Plate (6.5" x 5.1")
5970 Universal Thermostat Guard	2950 Universal Wall Plate (6.5" x 6.5")

FREE Contractor Branding Available! Visit our website (www.braeburnonline.com) for more information, contact your local distributor or call our sales department toll-free at 866.268.5599 (U.S.), +1.630.844.1968 (Outside the U.S.).

Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.