

P7267 4FT LED STRIP

 Ceiling mounted • Damp location listed **PROGRESS LED**


Description:

Integrated 4ft strip light. Great for utility rooms, garages and workrooms. Long lasting LED lights. 2912 lumens, 78 lumens per watt. 3000K ENERGY STAR.

Specifications:

- White (-30) (Painted)
- Steel construction
- White polycarbonate diffuser
- LED's integral to fixture
- Ceiling mount
- Dimmable to 10% with many Forward Phase (Triac) or Reverse Phase (ELV) dimmers
- Damp location listed
- Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements.
- Complies with "Americans with Disabilities Act" - ADA
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	37w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	2912/78 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15 Class B
Min. Start Temp	-25 °C
Max. Operating Temp	25°C
Warranty	5 year warranty
Labels	cETLus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016


P7267-3030K9

Images:



Dimensions:

- A) Length: 46-1/2"
- B) Width: 1-3/4"
- C) Height: 1-7/8"

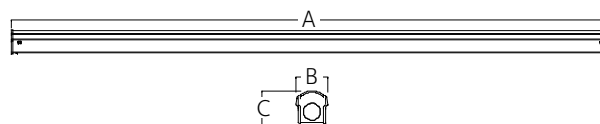


Photometrics:

P7267-3030K9

ELECTRICAL DATA	P7267-3030K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.316 A
Input Power	37
Power Factor	0.9
THD	<20%
EMI Filtering	FCC Title 47, Part 15 Class B
Operating Temperature	-25 °C to 25°C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

P7267-3030K9

LED Light Engine: 3000 K 90 CRI CRI
 System Wattage: 37
 Fixture delivered lumens: 2912
 Fixture Efficacy: 78
 Spacing Criteria: 1.28

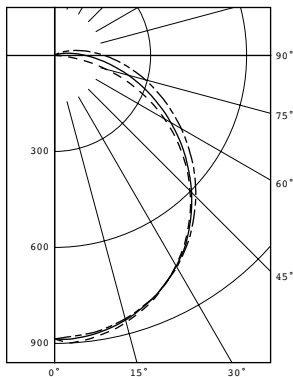
CANDELA DISTRIBUTION

CANDELA	DISTRIBUTION					FLUX
0.0	22.5	45.0	67.5	90.0		
0	886	886	886	886	886	886
5	896	878	885	881	878	84
15	863	846	856	853	852	241
25	800	786	798	800	799	367
35	711	700	716	723	722	446
45	598	590	605	622	624	469
55	468	465	483	508	513	435
65	322	328	356	390	400	355
75	167	188	239	278	294	248
85	34	76	137	181	197	141
90	3	40	97	141	156	
95	3	19	65	104	118	69
105	3	5	23	49	60	30
115	3	4	8	16	22	11
125	3	4	7	9	10	6
135	3	4	6	8	9	4
145	4	3	5	6	6	3
155	4	3	3	4	5	2
165	4	3	2	2	2	1
175	4	2	2	1	1	0
180	2	2	2	2	2	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	692	23.8
0-40	1138	39.1
0-60	2042	70.1
0-90	2786	95.7
90-120	109	3.8
90-130	115	4.0
90-150	123	4.2
90-180	125	4.3
0-180	2912	100.0

P7267-3030K9

Dimming Notes:

P7267 is designed to be compatible with many Triac/Forward Phase or Reverse Phase (ELV) controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron NTELV-300

Lutron DVELV-300P

Lutron DVCL-253P

Leviton 6674

Lutron N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.