

Description:

Alabaster style glass bowl ceiling fan light kit casts an inviting illumination in any size room. Includes (-09) Brushed Nickel, (-15) Polished Chrome, (-20) Antique Bronze, (-30) white, and (-143) Graphite finials for use with matching Progress Lighting fans. Universal style lets you use with any indoor fan that accept an accessory light. Quick-connect wiring makes the installation process quick and easy. Includes two 3000K, 800 lumen each (source), Title 24 certified LED bulbs.

Specifications:

- Alabaster glass Bowl
- Elegant alabaster glass bowl casts an inviting illumination.
- Includes (-09) Brushed Nickel, (-15) Polished Chrome, (-20) Antique Bronze, (-30) white, and (-143) Graphite finials for use with matching Progress Lighting fans.
- Quick-connect wiring to any progress fan that accept an accessory light.
- Ideal for bedroom, den or kitchen lighting.
- Includes two 3000K, 800 lumen each (source), Title 24 certified LED bulbs
- Energy Star Qualified
- Meets California T24 JA8-2016.
- Fully dimmable with dimmable bulbs.
- 6 in of wire supplied

Performance:

Number of Lamps	2
Input Power	9 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	800/88 (LM-82)
CCT	3000 K
CRI	90 CRI
Life (hours)	25000 (L70/TM-21)
EMI/RFI	Title 24
Max. Operating Temp	40 °C
Warranty	1-year Limited Warranty
Labels	UL Dry Location Listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016


P2612-01WB



Dimensions:

Diameter: 12 in
Height: 7-11/16 in

Alabaster glass Bowl
Width: 10-3/4 in
Height: 6 in

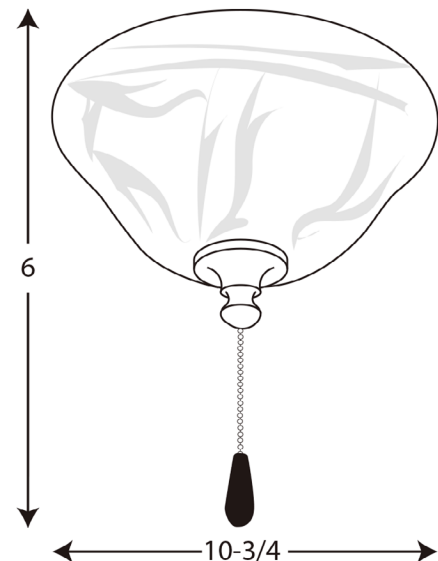



Dimming Notes:

P2612-01WB is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron_Diva DVELV-300P

Lutron_Nova T NTELV-300

Lutron_Maestro MAELV-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

P2612-01WB