

P7265 2FT LED STRIP

Ceiling mounted • Damp location listed



Description:

Integrated 2ft strip light. Great for utility rooms, garages and workrooms. Long lasting LED lights. 1508 lumens, 80 lumens per watt. 3000K ENERGY STAR.

Specifications:

- White (-30) (Painted)
- Steel construction
- White polycarbonate diffuser
- LED's integral to fixture
- Ceiling mount
- Dimmable to 10% with many Forward Phase (Triac) or Reverse Phase (ELV) dimmers
- Damp location listed
- Complies with "Americans with Disabilities Act" - ADA
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	18.8w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	1508/80 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15 Class B
Min. Start Temp	-25 °C
Max. Operating Temp	25°C
Warranty	5 year warranty
Labels	cETLus Damp location listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016


P7265-3030K9

Images:



Dimensions:

- A) Length: 22-7/8"
 B) Width: 1-3/4"
 C) Height: 1-7/8"

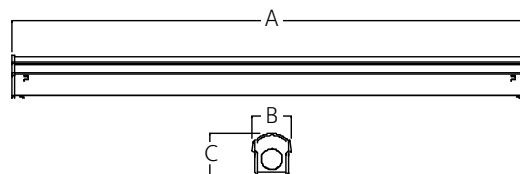

P7265 2FT LED STRIP

Ceiling mounted • Damp location listed




Photometrics:

P7265-3030K9

ELECTRICAL DATA		P7265-3030K9
Input Voltage		120 V
Input Frequency		60 Hz
Input Current		0.158 A
Input Power		18.8
Power Factor		0.9
THD		<20%
EMI Filtering		FCC Title 47, Part 15 Class B
Operating Temperature		-25 °C to 25°C
Dimming		Yes*
Over-voltage, over-current, short-circuit protected		
*See Dimming Notes for more information		

P7265-3030K9

LED Light Engine: 3000 K 90 CRI CRI
System Wattage: 18.8
Fixture delivered lumens: 1508
Fixture Efficacy: 80
Spacing Criteria: 1.27

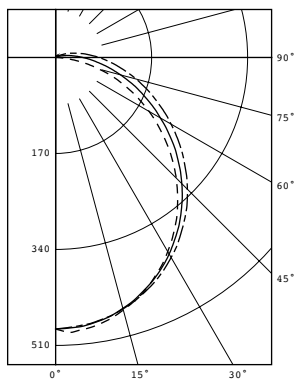

CANDELA DISTRIBUTION

CANDELA	DISTRIBUTION					FLUX
0.0	22.5	45.0	67.5	90.0		
0	481	481	481	481	481	
5	485	479	479	479	477	46
15	463	458	460	462	461	130
25	423	421	425	430	430	196
35	368	368	376	384	385	235
45	302	305	316	326	330	244
55	228	235	249	262	268	222
65	154	163	181	198	205	179
75	80	93	119	140	148	124
85	17	38	68	90	98	70
90	2	20	48	69	77	
95	1	9	32	51	58	34
105	1	2	11	24	29	14
115	1	2	4	8	11	5
125	1	2	4	5	5	3
135	1	2	4	5	5	3
145	1	1	3	3	3	2
155	1	1	2	3	3	1
165	1	1	1	2	2	0
175	1	1	1	1	0	0
180	1	1	1	1	1	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	372	24.6
0-40	607	40.2
0-60	1073	71.2
0-90	1446	95.9
90-120	54	3.6
90-130	57	3.8
90-150	61	4.0
90-180	62	4.1
0-180	1508	100.0

P7265 2FT LED STRIP

Ceiling mounted • Damp location listed



P7265-3030K9

Dimming Notes:

P7265 is designed to be compatible with many Triac/Forward Phase or Reverse Phase (ELV) controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron NTELV-300

Lutron DVELV-300P

Lutron DVCL-253P

Leviton 6681

Lutron N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.