

JUNO**6" BASICS SERIES™
LED RETROFIT BAFFLE TRIM**DOWNLIGHT RETROFIT FOR STANDARD 6"
RECESSED HOUSINGS
6RLD G3 07LM

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

**PRODUCT DESCRIPTION**

Energy efficient LED retrofit module fits into standard 6" IC or non-IC recessed housings • Replaces 65W incandescent lamp, producing over 700 lumens • Dimmable with most standard incandescent, magnetic low voltage and electronic low voltage dimmers • LED retrofit module is designed to provide 36,000 hours of life • 5 year warranty

PRODUCT SPECIFICATIONS

LED Downlight Retrofit Trim Cast aluminum trim with white baffle and flange • All-in-one design where LED light engine mounts directly to trim for ease of installation into existing 6" recessed housings with medium base sockets • Provided with torsion springs.

LED Light Engine LEDs are mounted directly to cast aluminum housing providing superior thermal management to ensure long life • 2700K, 3000K, and 3500K LED color temperature • 90 CRI minimum • Accommodates 120 volts AC at 60Hz • Dimmable with most standard incandescent, magnetic low voltage and electronic low voltage dimmers • For a list of compatible dimmers, see [JUNORETROBASICS-DIM](#).

Electrical Connections Trim features quick connect plug installed as standard for installation into IC23 LEDT24 and IC23R LEDT24 housings with mating connector • Trim ships with a medium base socket adapter whip for installation into 6" incandescent housings with medium base sockets.

Trim Cast aluminum baffle trim with white finish • Diffusing lens conceals the LEDs from direct view and provides uniform aperture luminance.

Life Rated for 36,000 hours at 70% lumen maintenance.

Labels ENERGY STAR® Certified • Certified to the high efficacy requirements of California T24 • UL and cUL classified for use with most standard UL listed 6" recessed incandescent housings and Juno IC23 LEDT24 and IC23R LEDT24; see below for specific compatibility requirements • Damp location • Suitable for wet locations (indoor covered ceilings).

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

INSTALLATION

The LED retrofit baffle trim is provided with torsion springs as standard. Accessory kit available for use in housings that do not have torsion spring retaining brackets.

COMPATIBLE HOUSINGS

The 6RLD retrofit module is compatible with most 6" recessed housings measuring at least 4" high with an inside diameter between 5-3/4" and 7". Removal of the housing socket plate or socket mounting bracket may be required in order for the trim to fit properly.

Compatible housings include, but not limited to:

Juno housings: IC2, IC21, IC22, IC23 and TC2 Series

Juno quick-connect LED housings: [IC23 LEDT24](#) and [IC23R LEDT24](#)


VuLite® housings: V6IC and V6TC Series

Lithonia® housings: L7X and LC6 Series

Halo® housings: H7 Series, H25 Series

Thomas® housings: PS1 and PS3 Series

Capri® housings: CR1, PR1, QL6 Series, P9ASIC Series

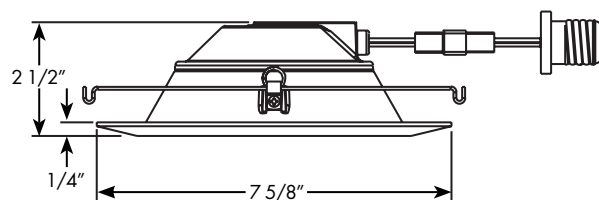**DIMENSIONS****MOUNTING ACCESSORIES****V6RLTRB**

Torsion receiver bracket kit to install into housings that do not have torsion receiver brackets.

PERFORMANCE DATA

	27K	30K	35K
Input Voltage	120V	120V	120V
Input Power Typical	10W	10W	10W
Frequency	60Hz	60Hz	60Hz
EMI/RFI	FCC Title 47, Part 15 Class B (consumer)	FCC Title 47, Part 15 Class B (consumer)	FCC Title 47, Part 15 Class B (consumer)
Minimum starting temp	-30°C (-22°F)	-30°C (-22°F)	-30°C (-22°F)
CRI	90 min.	90 min.	90 min.
CCT	2700K	3000K	3500K

ORDERING INFORMATION

Ordering Example: 6RLD G3 07LM 27K 90CRI 120 FRPC WWH

Trim Series	Generation	Lumens	Color Temperature	Color Rendering Index	Voltage	Driver	Finish
6RLD 6" Juno Basics Retrofit Downlight	G3 Generation 3	07LM 700 Nominal Lumens	27K 2700K 30K 3000K 35K 3500K	90CRI 90+ CRI	120 120V	FRPC Forward/Reverse Phase Cut	WWH White, White Trim Ring

6" BASICS SERIES™ LED RETROFIT BAFFLE TRIM

DOWNLIGHT RETROFIT FOR STANDARD 6"
RECESSED HOUSINGS
6RLD G3 07LM

PHOTOMETRICS


Distribution Curve

Distribution Data

Coefficient of Utilization

**Illuminance Data at 30" Above Floor for
a Single Luminaire**

6RLD G3 07LM 27K, 2700K LEDs, input watts: 10, delivered lumens: 728, LM/W = 73, test no. PT10161403R, tested in accordance to IESNA LM-79.



CP Summary

0°
0° 381
5° 379
15° 359
25° 318
35° 260
45° 191
55° 106
65° 24
75° 12
85° 3
90° 0


Coefficients of Utilization

pc	20%					
	80%		70%		50%	
pw	70%	50%	30%	50%	30%	10%
0	119	119	119	116	116	116
1	111	108	104	105	102	100
2	103	97	91	95	90	86
3	96	87	80	86	79	74
4	89	79	71	77	70	65
5	82	71	64	70	63	58
6	77	65	57	64	57	51
7	72	60	52	59	51	46
8	67	55	47	54	47	42
9	63	51	43	50	43	38
10	59	47	40	46	39	35

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Fixture
0°- 30°	283	38.9	38.9
0°- 40°	445	61.1	61.1
0°- 60°	685	94.1	94.1
0°- 90°	728	100.0	100.0
90°- 180°	0	0.0	0.0
0°- 180°	728	100.0	100.0

6RLD G3 07LM 30K, 3000K LEDs, input watts: 10, delivered lumens: 761, LM/W = 76, test no. PT10161403R, tested in accordance to IESNA LM-79.



CP Summary

0°
0° 398
5° 396
15° 375
25° 332
35° 272
45° 200
55° 111
65° 25
75° 12
85° 3
90° 0


Coefficients of Utilization

pc	20%					
	80%		70%		50%	
pw	70%	50%	30%	50%	30%	10%
0	119	119	119	116	116	116
1	111	108	104	105	102	100
2	103	97	91	95	90	86
3	96	87	80	86	79	74
4	89	79	71	77	70	65
5	82	71	64	70	63	58
6	77	65	57	64	57	51
7	72	60	52	59	51	46
8	67	55	47	54	47	42
9	63	51	43	50	43	38
10	59	47	40	46	39	35

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Fixture
0°- 30°	296	38.9	38.9
0°- 40°	465	61.1	61.1
0°- 60°	716	94.1	94.1
0°- 90°	761	100.0	100.0
90°- 180°	0	0.0	0.0
0°- 180°	761	100.0	100.0

6RLD G3 07LM 35K, 3500K LEDs, input watts: 10, delivered lumens: 795, LM/W = 80, test no. PT10161403R, tested in accordance to IESNA LM-79.



CP Summary

0°
0° 416
5° 414
15° 392
25° 347
35° 284
45° 209
55° 116
65° 26
75° 13
85° 3
90° 0

Coefficients of Utilization

pc	20%					
	80%		70%		50%	
pw	70%	50%	30%	50%	30%	10%
0	119	119	119	116	116	116
1	111	108	104	105	102	100
2	103	97	91	95	90	86
3	96	87	80	86	79	74
4	89	79	71	77	70	65
5	82	71	64	70	63	58
6	77	65	57	64	57	51
7	72	60	52	59	51	46
8	67	55	47	54	47	42
9	63	51	43	50	43	38
10	59	47	40	46	39	35

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Fixture
0°- 30°	309	38.9	38.9
0°- 40°	486	61.1	61.1
0°- 60°	748	94.1	94.1
0°- 90°	795	100.0	100.0
90°- 180°	0	0.0	0.0
0°- 180°	795	100.0	100.0