


Job Name:	
Tag#	



Submittal Data Sheet	FTX30NVJU / RK30NMVJU
2.5-Ton Wall Mounted Cooling Only System	

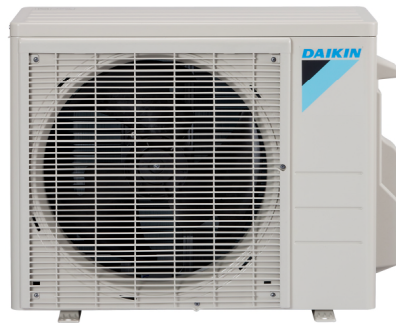

Efficiency	
Cooling	
SEER	17.50
EER	9.85

Performance	
Cooling (Btu/hr)	
Rated (Min/Max)	31,400 (10,200 / 31,400)
Sensible @ AHRI	21,030
Standard Operating Range	50°F – 115 °F
Extended Operating Range*	-22°F – 115 °F
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB
*With field settings and wind baffle	

Complete warranty details available from your local dealer or at www.daikincomfort.com. Warranty registration not required to receive the 10-Year parts limited warranty for residential or commercial installations.

Indoor Specifications		
Airflow Rate (cfm)	Cooling	
	H	M
	890	727
	L	SL
572	512	
Sound (dBA) H / M / L / SL	53 / 47 / 40 / 37	
Dimensions (H x W x D) (in)	13-3/8 x 47-1/4 x 10-3/16	
Weight (Lbs)	38	

Electrical		
	208/60/1	230/60/1
System MCA	17	17
System MFA	20	20
Compressor RLA	16.25	16.25
Outdoor fan motor FLA	.62	.62
Outdoor fan motor W	93	93
Indoor fan motor FLA	.37	.37
Indoor fan motor W	64	64
MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A) RLA: Rated load amps (A) W: Fan motor rated output (W)		


Outdoor Specifications		
Compressor	Hermetically Sealed Swing Type	
Refrigerant	R-410A	
Factory Charge (Lbs)	3.64	
Refrigerant Oil	PVE (FVC50K)	
Airflow Rate (cfm)	Cooling	
	H	2,528
Sound Pressure Level (dBA)	56	
Dimensions (H x W x D) (in)	28-15/16 x 34-1/4 x 12-5/8	
Weight (Lbs)	133	

Piping	
Liquid (in)	1/4
Gas (in)	5/8
Drain (in)	5/8
Max. Interunit Piping Length (ft)	98.4
Max. Interunit Height Difference (ft)	65.625
Chargeless (ft)	32.8
Additional Charge of Refrigerant (oz/ft)	.32

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)


FTX30NVJU Dimensional Data

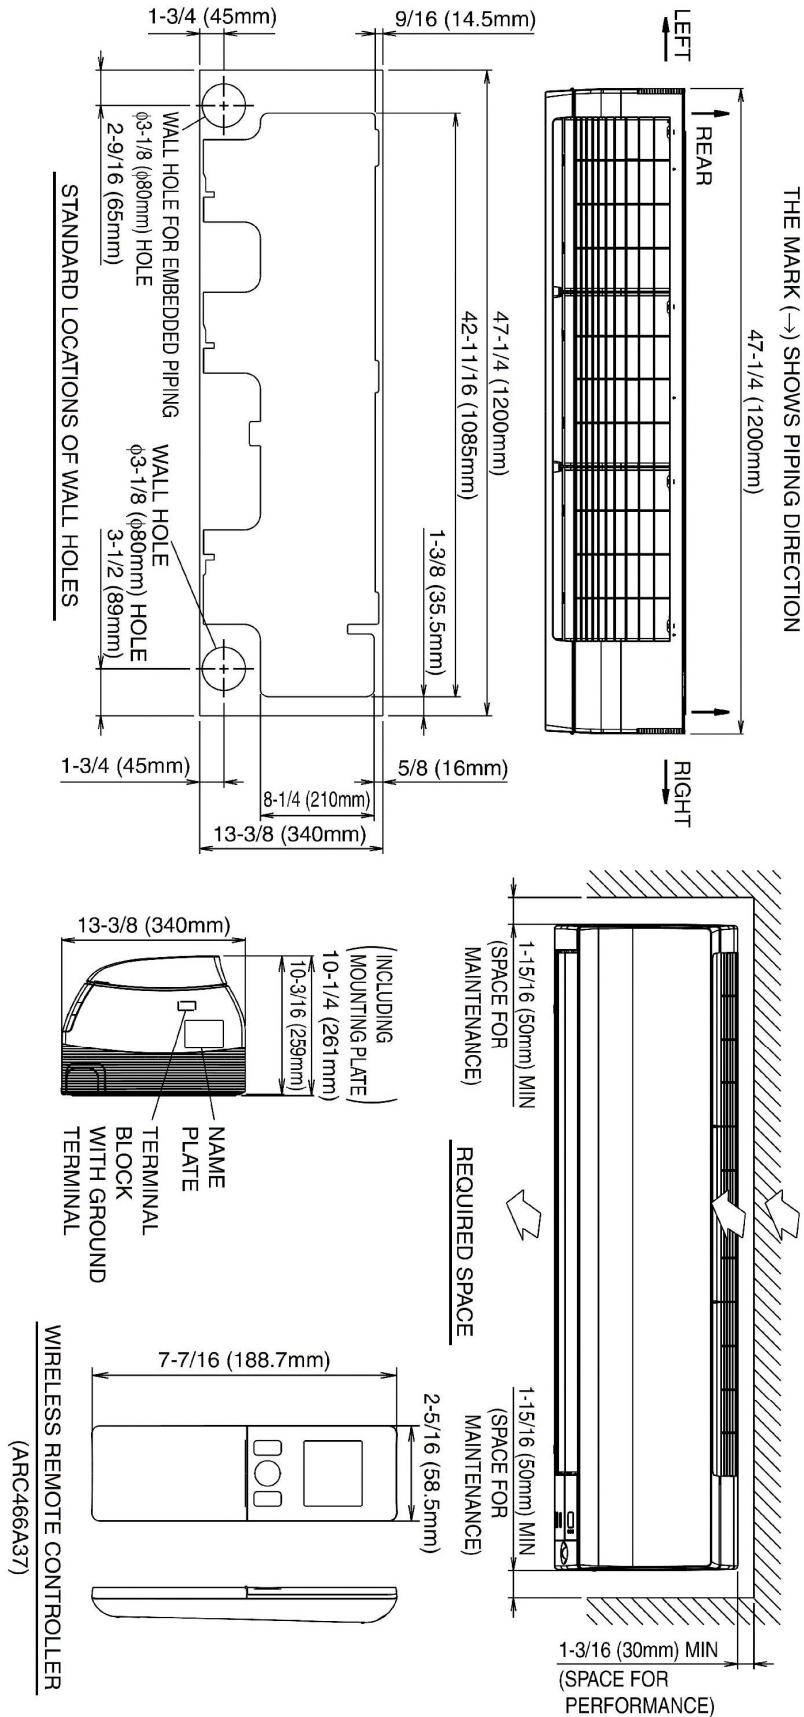

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

RK30NMVJU Dimensional Data

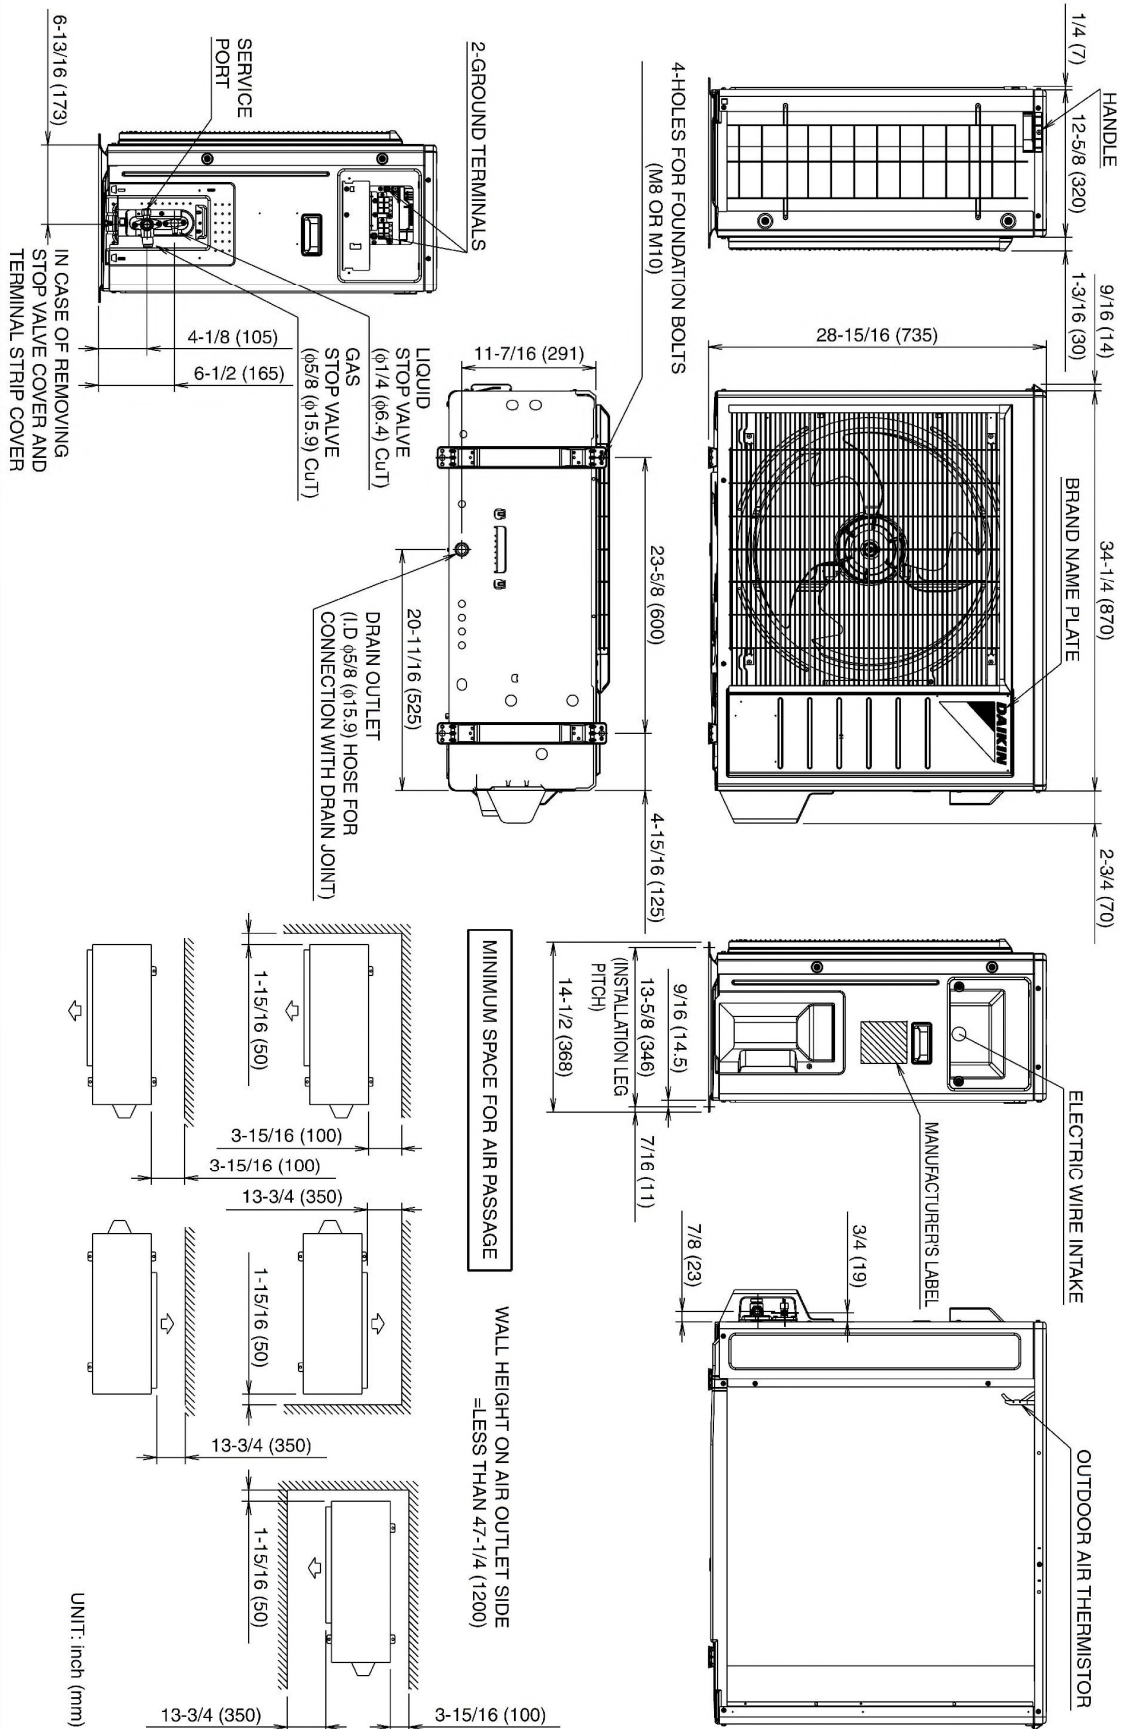

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)


Indoor Unit		
Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter
	BRC944B2-A08	Wired Remote Controller kit
	BRCW901A08	Wired Remote Controller Cable – 25ft (included in above kit)
	BRCW901A03	Wired Remote Controller Cable – 10 ft
	DACA-TS1-1	Daikin ENVi Intelligent Thermostat Kit
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump
	KRP928BB2S	Interface Adaptor for DIII-NET

Outdoor Unit		
Included	Part Number	Description
	KPW063A4	Air Adjustment Grille (RX & RK)
	KKG063A42	Back protection wire net

Job Name:	
Tag#	



Submittal Data Sheet	FTX36NVJU / RK36NMVJU
3-Ton Wall Mounted Cooling Only System	

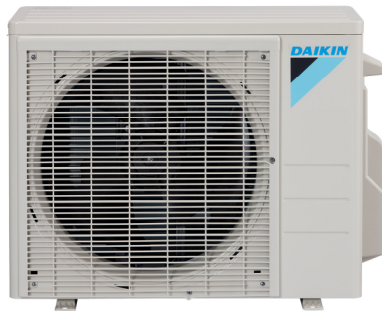

Efficiency	
Cooling	
SEER	15.90
EER	9.10

Performance	
Cooling (Btu/hr)	
Rated (Min/Max)	34,400 (10,200 / 34,400)
Sensible @ AHRI	22,160
Standard Operating Range	50°F – 115°F
Extended Operating Range*	-22°F – 115°F
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB
*With field settings and wind baffle	

Complete warranty details available from your local dealer or at www.daikincomfort.com. Warranty registration not required to receive the 10-Year parts limited warranty for residential or commercial installations.

Indoor Specifications		
Airflow Rate (cfm)	Cooling	
	H	M
	915	742
	L	SL
572	512	
Sound (dBA) H / M / L / SL	54 / 47 / 40 / 37	
Dimensions (H x W x D) (in)	13-3/8 x 47-1/4 x 10-3/16	
Weight (Lbs)	38	

Electrical		
	208/60/1	230/60/1
System MCA	17	17
System MFA	20	20
Compressor RLA	16.25	16.25
Outdoor fan motor FLA	.83	.83
Outdoor fan motor W	123	123
Indoor fan motor FLA	.37	.37
Indoor fan motor W	64	64
MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A) RLA: Rated load amps (A) W: Fan motor rated output (W)		


Outdoor Specifications		
Compressor	Hermetically Sealed Swing Type	
Refrigerant	R-410A	
Factory Charge (Lbs)	3.64	
Refrigerant Oil	PVE (FVC50K)	
Airflow Rate (cfm)	Cooling	
	H	2,811
Sound Pressure Level (dBA)	59	
Dimensions (H x W x D) (in)	28-15/16 x 34-1/4 x 12-5/8	
Weight (Lbs)	133	

Piping	
Liquid (in)	1/4
Gas (in)	5/8
Drain (in)	5/8
Max. Interunit Piping Length (ft)	98.4
Max. Interunit Height Difference (ft)	65.625
Chargeless (ft)	32.8
Additional Charge of Refrigerant (oz/ft)	.32

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)


FTX36NVJU Dimensional Data

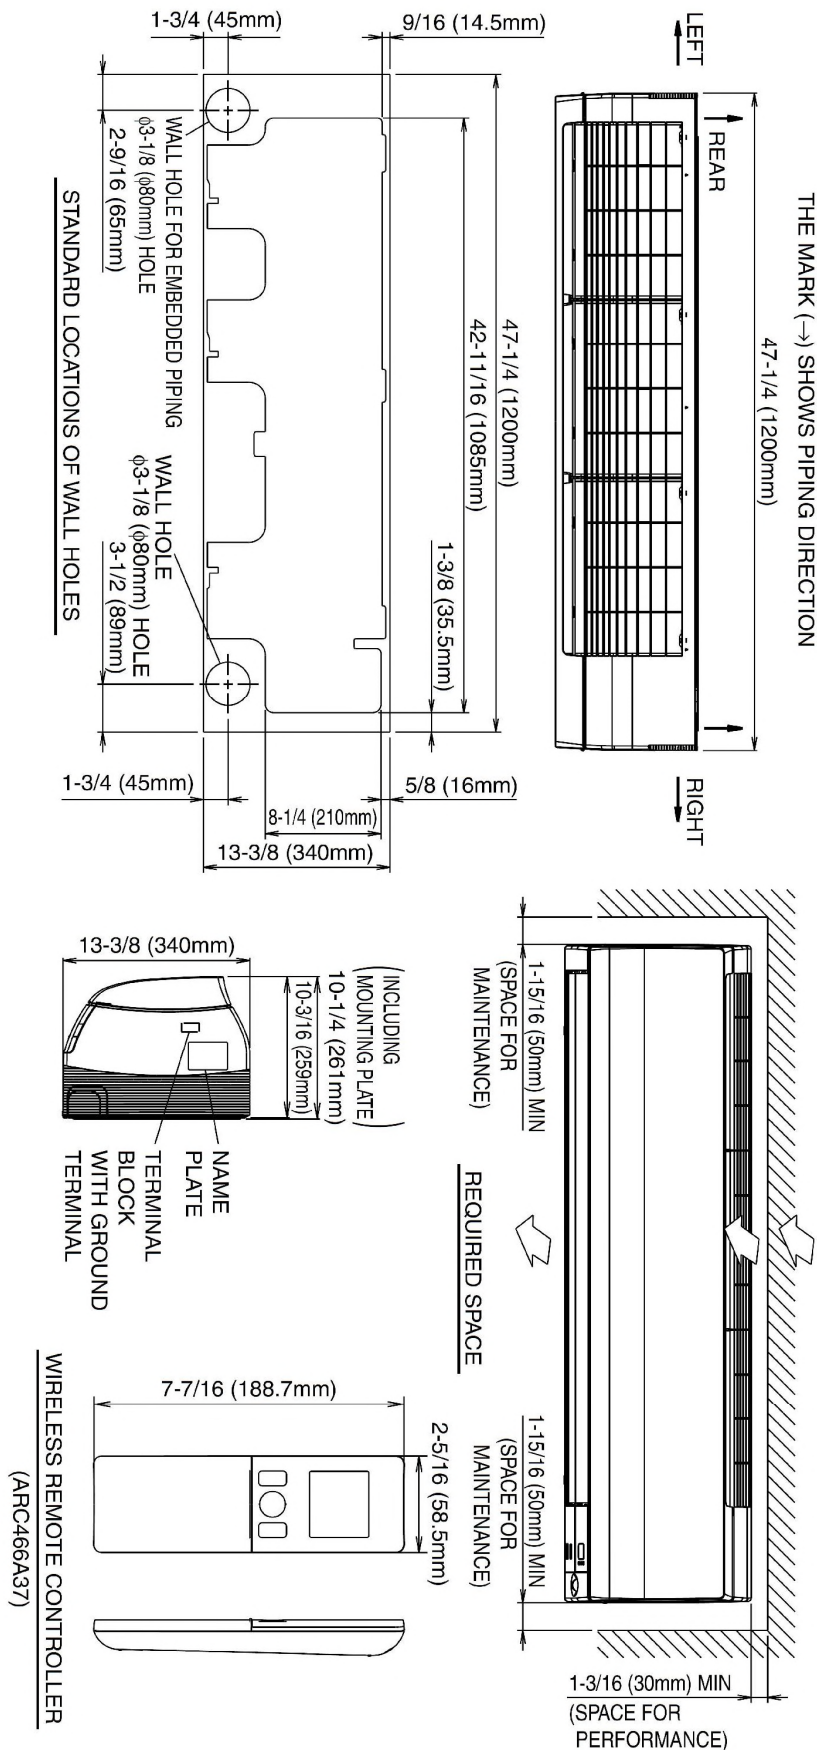

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

RK36NMVJU Dimensional Data

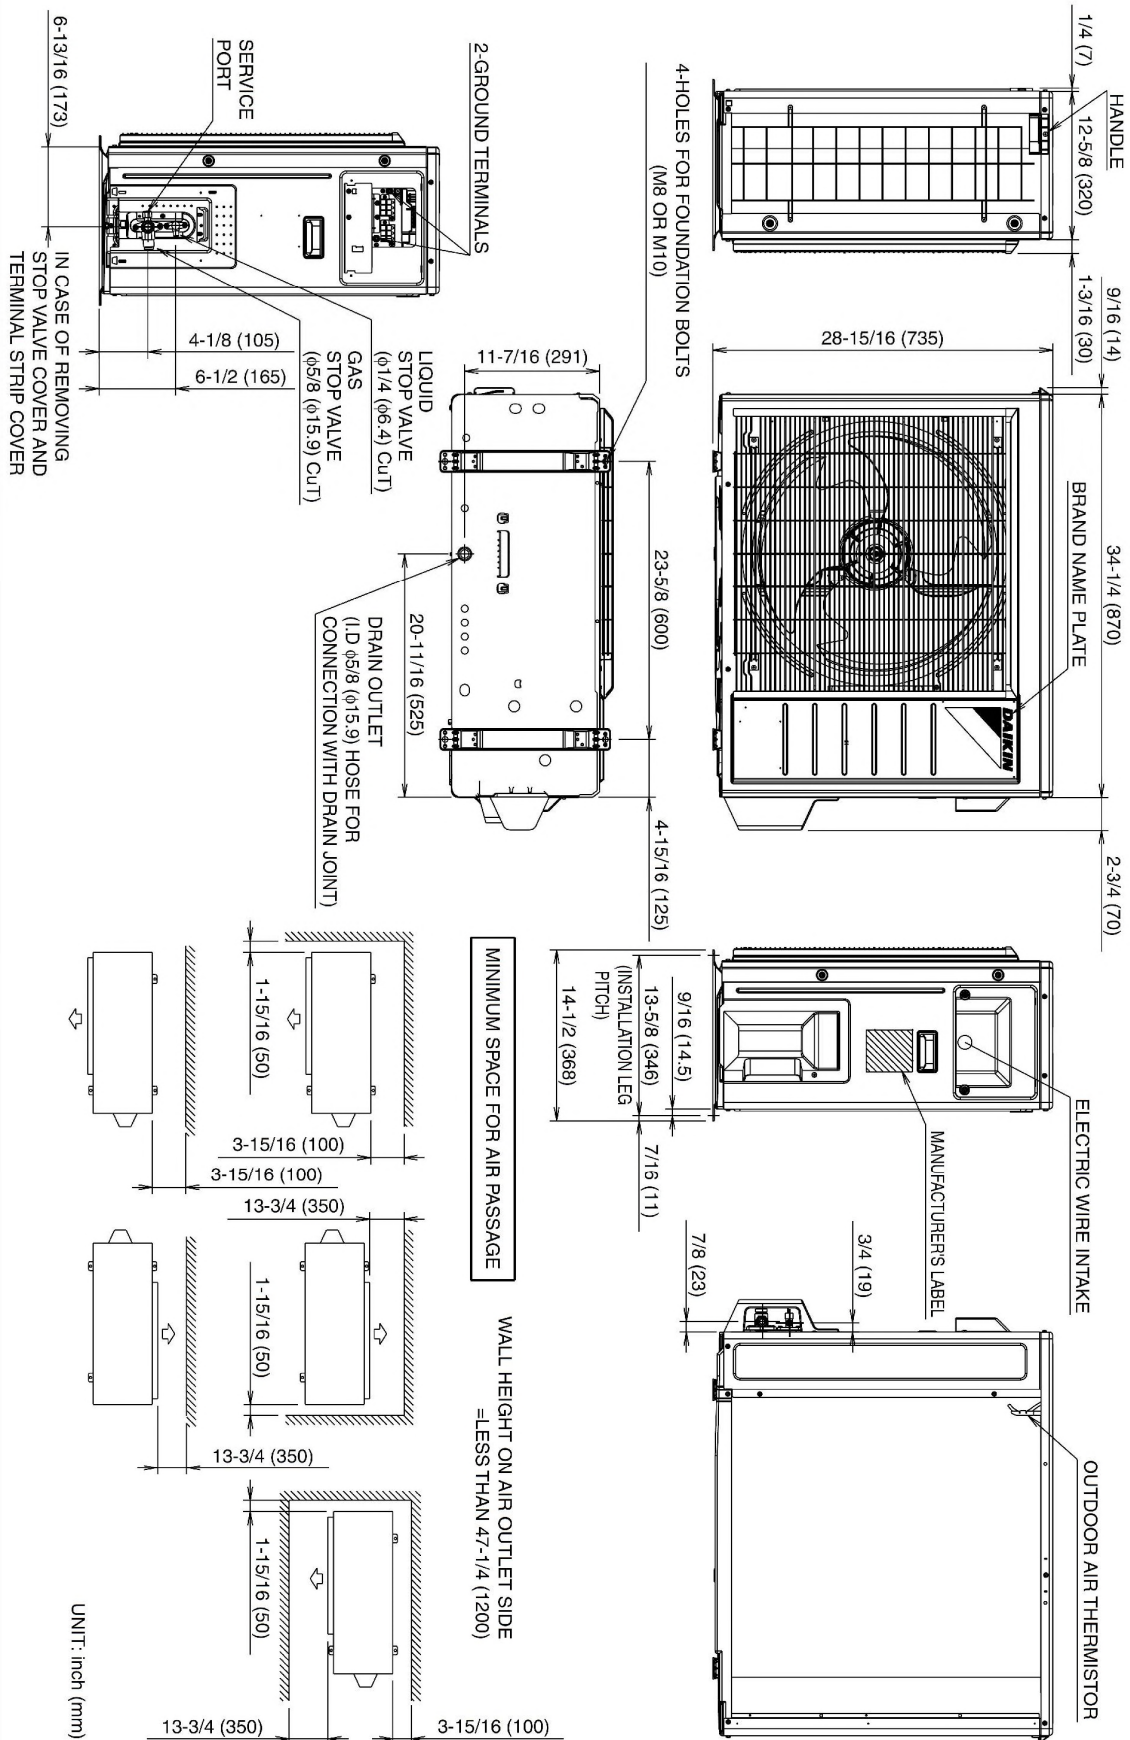

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)



Indoor Unit		
Included	Part Number	Description
	BRP072A43	Wireless Interface Adapter
	BRC944B2-A08	Wired Remote Controller kit
	BRCW901A08	Wired Remote Controller Cable – 25 ft (included in above kit)
	BRCW901A03	Wired Remote Controller Cable – 10 ft
	DACA-TS1-1	Daikin ENVi Intelligent Thermostat Kit
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump
	KRP928BB2S	Interface Adaptor for DIII-NET

Outdoor Unit		
Included	Part Number	Description
	KPW063A4	Air Adjustment Grille (RX & RK)
	KKG063A42	Back protection wire net