

CARRAWAY

3-HOLE ROMAN TUB FILLER

SKU: 948677



FEATURES

- 3-hole installation.
- Spout max. flow rate: 12.7 gpm (48.1L/min) max @ 80 psi.
- Optional rough-in valve:
- Brass coupling nut.
- Accommodates an 8" - 16" faucet spread.
- Deck thickness max. 1.5" or screws can be removed to accommodate thicker deck installations up to 2".

SIGNATURE HARDWARE Lifetime Warranty

See website for detailed warranty information.

CONTENTS


TUB FILLER	PAGE 2
VALVE	PAGE 3

REVISED 01/15/2020

CARRAWAY

3-HOLE ROMAN TUB FILLER

SKU: 948677

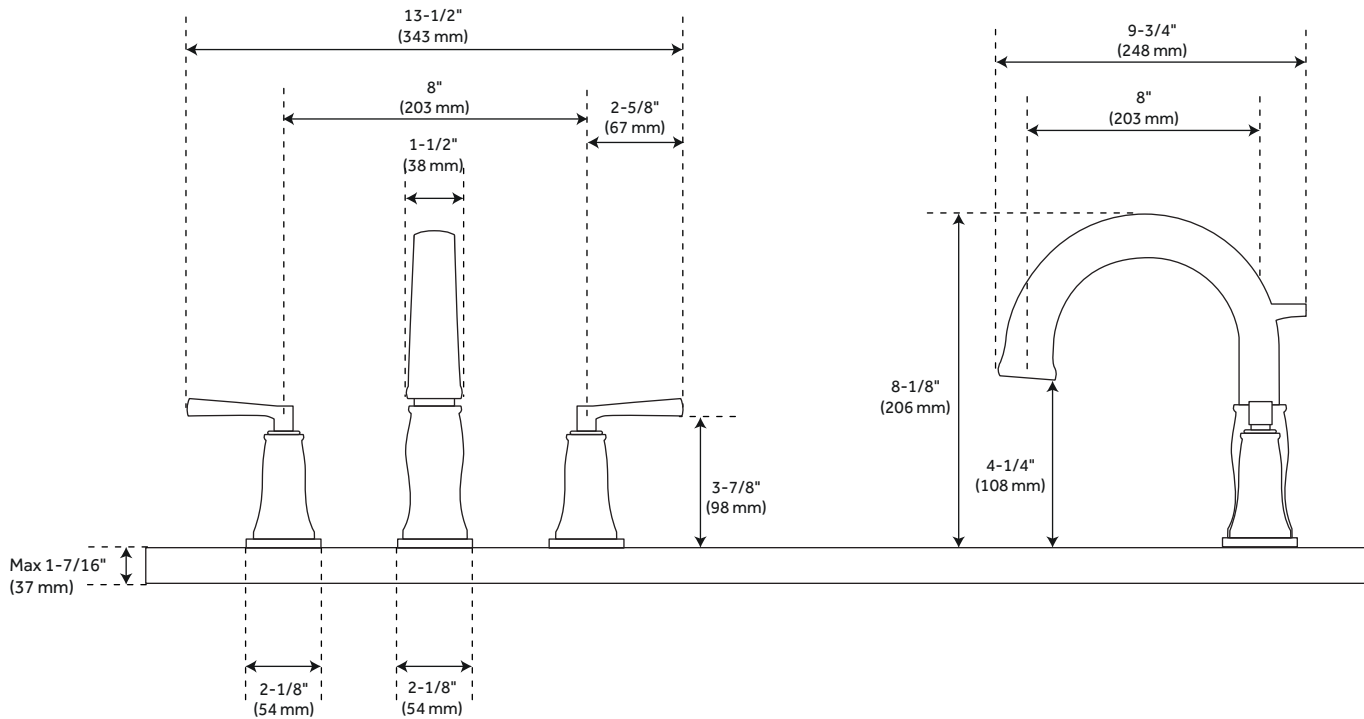

FEATURES

Installation Type: Deck Mount
Handle Type: Lever
Max. Deck Thickness: 2"
Tub Faucet Material: Brass
Length: 13-1/2"
Width: 9-3/4"
Height: 8-1/8"
Height To Spout: 4-1/4"
Spout Reach: 8"
Spout Width: 1-1/2"
Hot and Cold Indicators: No
Drain Included: No
Base Plate Length: 2-1/8"
Base Plate Width: 2-1/8"
Ceramic Disc Cartridges: Yes

CODES/STANDARDS

cUPC
ASME A112.18.1/CSA B125.1
ADA Compliant (when installed according to
ADA Standards)



SIGNATURE HARDWARE LIFETIME WARRANTY

See website for warranty information




All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

PAGE 2
Code: SHCR3RTBN/SHCR3RTPN
SHCR3RTCP

3 HOLE

OPTIONAL ROMAN TUB FILLER ROUGH-IN VALVE

SKU: 448004

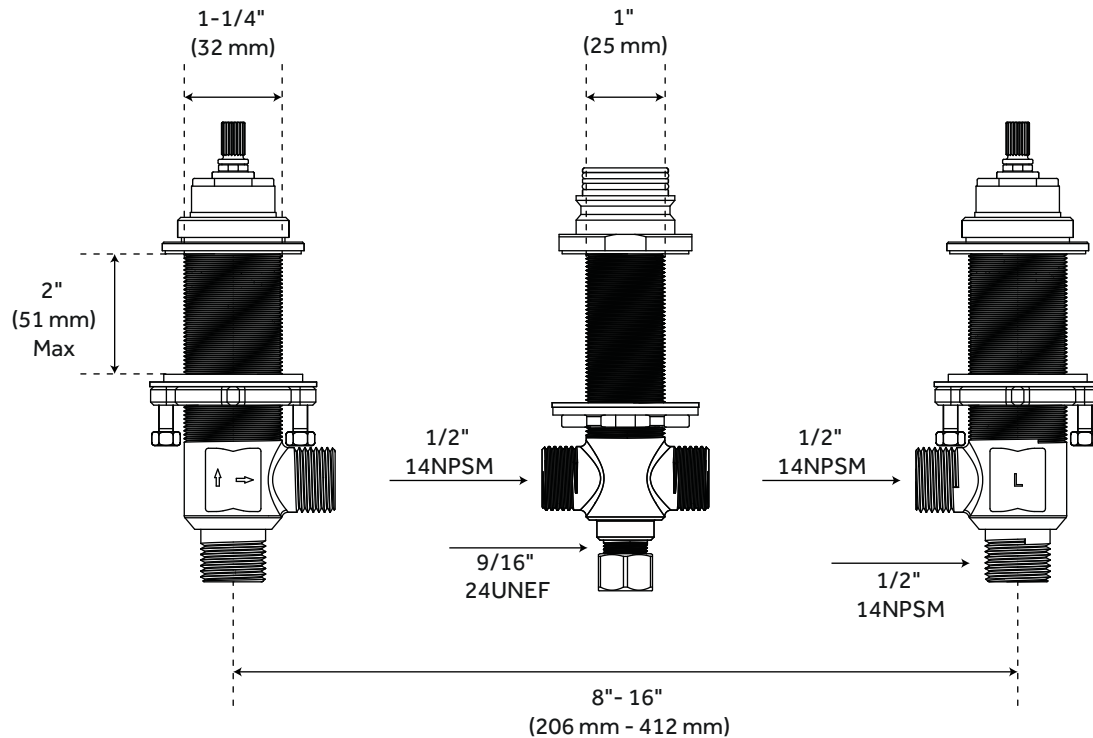

FEATURES

- Fits 3-hole
- Brass coupling nut Trim sold separately
- Flow rate: 8 GPM at 20 PSI
- Deck thickness max. 1.5" or screws can be removed to accommodate thicker deck installations up to 2"
- Replacement cartridges available -
 - HOT MIR3357027H and
 - COLD MIR3357027C

CODES/STANDARDS

- cUPC
- ASME A112.18.1/CSA B125.1
- ANSI A117.1 (when installed according to ADA standards)
- Massachusetts Accepted

SIGNATURE HARDWARE LIFETIME WARRANTY

See website for warranty information



All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

PAGE 3
CODE: SH674163