


## Venturi™ 4" Centerset Lavatory Faucet

LF-048-VNBB Finish(BB)  LF-048-VNKK Finish(KK)   
 LF-048-VNBB Finish(BG)  LF-048-VNGS Finish(GS)   
 LF-048-VNCC Finish(CC)  LF-048-VNYY Finish(YY)



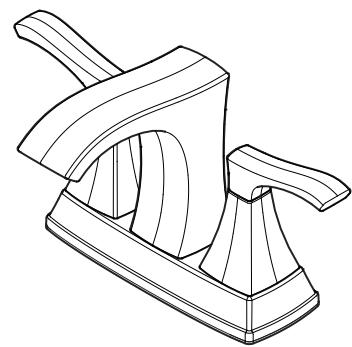


### Specifications

#### Features

- 1.2 GPM Flow Rate
- Fixed Hubs
- 3-Hole Installation
- High Arc Spout
- Mounting Hardware Included
- TiteSeal™ Deckplate
- PVD Finish (KK Finish Only)
- Shear Valves
- Spot Defense Finish Resists Spots and Fingerprints (GS Finish Only)
- Unique Ribbon Water Flow
- Push & Seal™ Pop-Up
- Pforever Warranty®

#### Dimensions

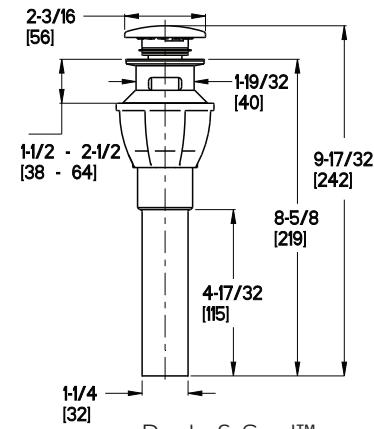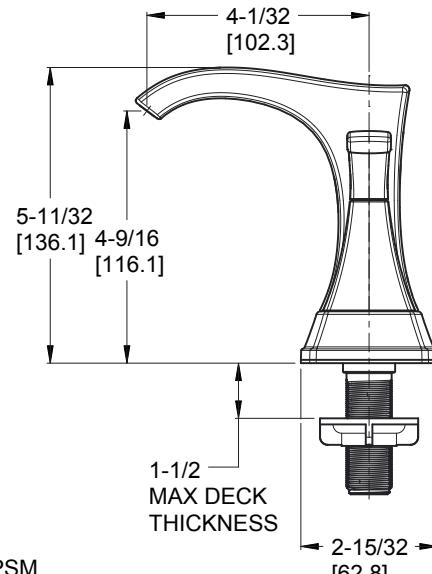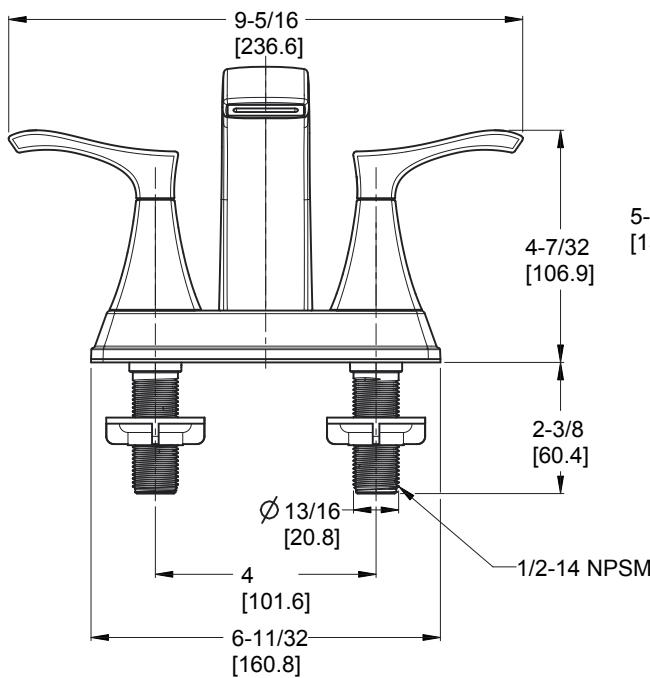

Ø1 Min to Ø1 1/2 Max. Deck Hole Openings

- 3-Hole Installation
- Push & Seal™ Pop-Up

#### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- CEC Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- EPA WaterSense Certification 1.2 gpm, 4.5 L/Min

