


HIGH PRESSURE CONTROL VALVES

KIMRAY INC.®

1" & 2" HPCV OVERSIZED SOFT SEATS STEEL BODY DUCTILE TOPWORKS

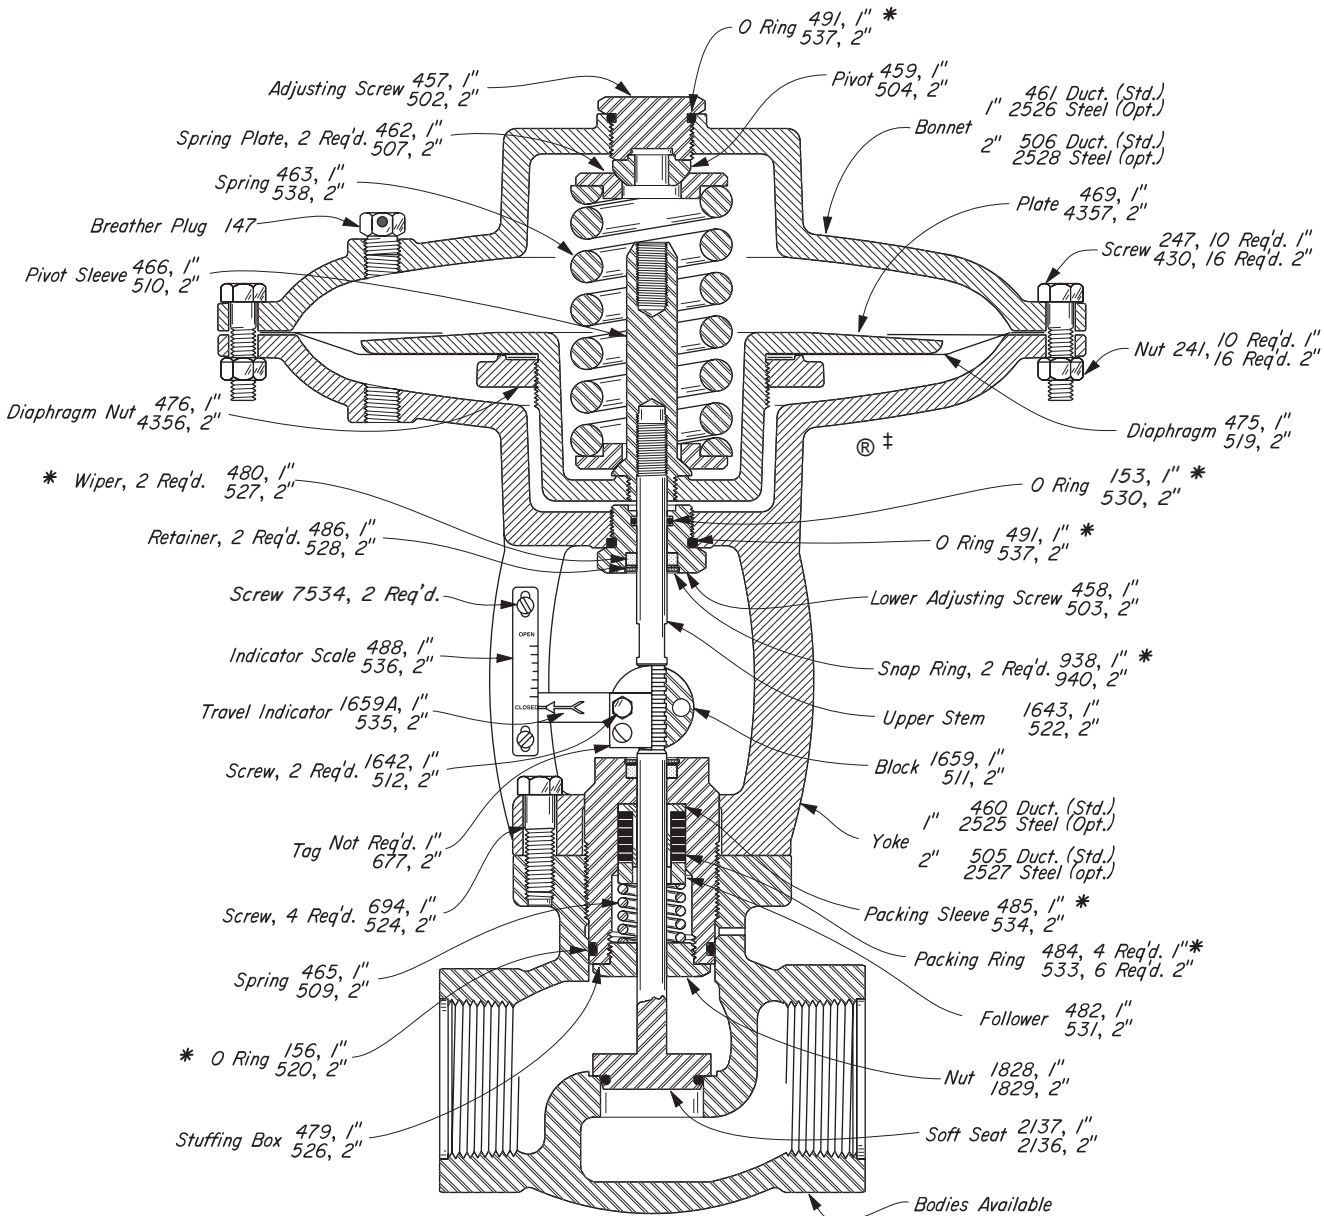

BODY TYPE	SCREWED		
	SIZE	BODY	W.P.
THRU	1"	452	4000 lbs.
	2"	493	2000 lbs.
ANGLE	1"	453	4000 lbs.

THRU VALVES AVAILABLE:

CAT. NO.	INNER VALVE	VALVE	PRES. DROP.	MAX W.P.	KIT
EBK	1"	1400 SMT PO 1 IV	300	4000	RFA
EAD	1"	1400 SMA PO 1 IV	300	4000	RFA
EFS	1-1/2"	2200 SMT PO 1-1/2 IV	300	2000	RFE

Flanged bodies are available. Specify when ordering.
For dimensions refer to Table of Contents. Flanged dimensions available on request.

*These are recommended spare parts and are stocked as repair kits.

APPLICATIONS:

For increased flow at low operating pressure. Maximum pressure drop is 300 psig For on - off service only.

FEATURES:

Increased capacity
Uses standard valve body
Teflon seal

Kimray is an ISO 9001- certified manufacturer.