

Pipetite

Sizes Styles available to fit tube or pipe up to 15" in diameter

Connections Pipetite Standard, ReBoot, and Flat have pre-drilled mounting holes

All Pipetite products are self-sealing

Materials Hygienic white silicone and 316 stainless steel, compatible with cleaning solution

More Info 500 °F temperature rating


Pipetite Standard and Grommet are IP34 rated

Mini Grommets are NEMA rated for Type 4, Type 4X, and Type 6 Enclosures

Molded lines guide your cutting

Pipetite forms a flexible, sanitary seal that allows for pipeline movement

 csidesigns.com

 800.654.5635
417.831.1411



CSI

2700 N Partnership Blvd
Springfield, MO 65803



Standard



Flat



ReBoot


Dimensions

Standard


For New Tubing Installations

SIZE	TUBE OD	A	B	ANCHORS	ITEM
1	0.00 - 1.00	2.76	2.24	4	PT1-000
2	0.00 - 2.50	4.17	3.58	4	PT2-000
3	0.00 - 3.74	5.79	5.04	6	PT3-000
4	2.76 - 5.31	7.36	6.61	6	PT4-000
5	3.94 - 7.09	9.33	8.39	10	PT5-000

All dimensions are shown in inches. Bolt holes are 0.177 inches in diameter. Sizes 1, 2, and 3 are full cones. Sizes 4 and 5 are not available as full cones.

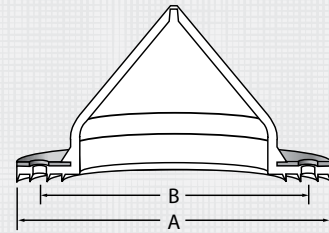

Sizes 1, 2, and 3

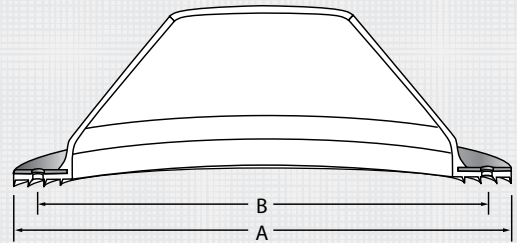


Sizes 4 and 5

Flat

For Jacketed Tank Installations

SIZE	TUBE OD	A	B	ANCHORS	ITEM
2	0.00 - 2.50	4.17	3.58	6	PTF2-000
3	0.00 - 3.74	5.79	5.04	6	PTF3-000
4	0.00 - 5.31	7.36	6.61	6	PTF4-000

All dimensions are shown in inches. Bolt holes are 0.177 inches in diameter.

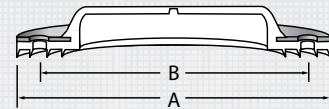




Sleeve Boot




Grommet



Mini Grommet

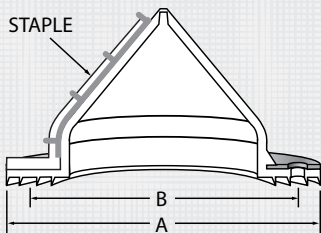

Sizes 2 and 3

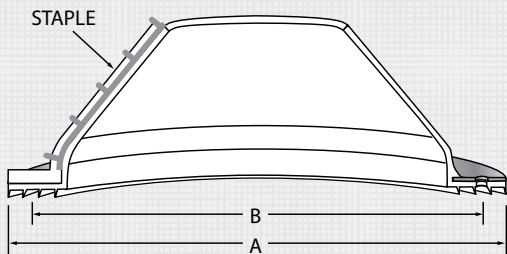

Sizes 4, 5, and 9

ReBoot

For Existing Tubing Installations

SIZE	TUBE OD	A	B	ANCHORS	ITEM
2	0.00 - 2.50	4.17	3.58	5	PTR2-000
3	0.00 - 3.74	5.79	5.04	7	PTR3-000
4	2.76 - 5.31	7.36	6.61	7	PTR4-000
5	3.94 - 7.09	9.33	8.39	10	PTR5-000
9	6.50-15.00	19.31	18.39	20	PTR9-000

All dimensions are shown in inches. Bolt holes are 0.177 inches in diameter. Sizes 2 and 3 are full cones. Sizes 4, 5, and 9 are not available as full cones.



Anchor 1



Anchor 2

Anchors

For Mounting Pipetite Standard, Flat, and ReBoot

ANCHOR	SURFACE TYPES	ITEM
1	Concrete, brick	PTA-1
2	Panel walls, thin walls, concrete, brick	PTA-2




Pipetite

Dimensions

Sleeve Boot For Tube-In-Tube Transitions

SIZE	SLEEVE OD	TUBE OD	A	ITEM
1	4	0.0 - 3.5	4.5	PTS1-000
2	6	0.0 - 5.5	6.0	PTS2-000


All dimensions are shown in inches.




Grommet For Cabinets, Panels and Enclosures

SIZE	TUBE OD	A	B	ITEM
1	0.00 - 1.00	1.89	1.38	PTG1-000
2	0.00 - 2.56	3.23	2.75	PTG2-000
3	0.00 - 3.74	4.72	4.00	PTG3-000
4	2.76 - 5.31	6.30	5.75	PTG4-000
5	3.94 - 7.09	7.95	7.25	PTG5-000

All dimensions are shown in inches.
Grommets fit wall thicknesses from 18 gauge to 11 gauge (0.048 to 0.120 in).
Sizes 1, 2, and 3 are full cones. Sizes 4 and 5 are not available as full cones.



Sizes 1, 2, and 3

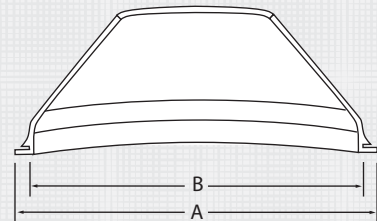


Sizes 4 and 5

Mini Grommet

NEMA rated for Type 4, Type 4X and Type 6 Enclosures

SIZE	TUBE OD	A	B	ITEM
1	0.25	0.87	0.63	PTMG-1
2	0.31	0.87	0.63	PTMG-2
3	0.38	0.87	0.63	PTMG-3
4	0.50	0.87	0.63	PTMG-4

All dimensions are shown in inches.
Grommets fit wall thicknesses from 18 gauge to 11 gauge (0.048 to 0.120 in).



CSI

2700 N Partnership Blvd
Springfield, MO 65803

csidesigns.com

800.654.5635
417.831.1411