

PFSH306G SHOWER HEAD



Product Features

- Brass and ABS construction
- 1/2" connection
- 5-function shower head
(Full spray, massage, bubble, spray+bubble, spray+massage)
- Easy-clean nozzles
- Max. flow rate 1.75 gpm (6.6 L/min) at 80 psi




Codes and Certifications



PFSH306GCP

- Certified to ASME A112.18.1 / CSA B125.1
- cUPC/ CSA listed
- EPA WaterSense certified

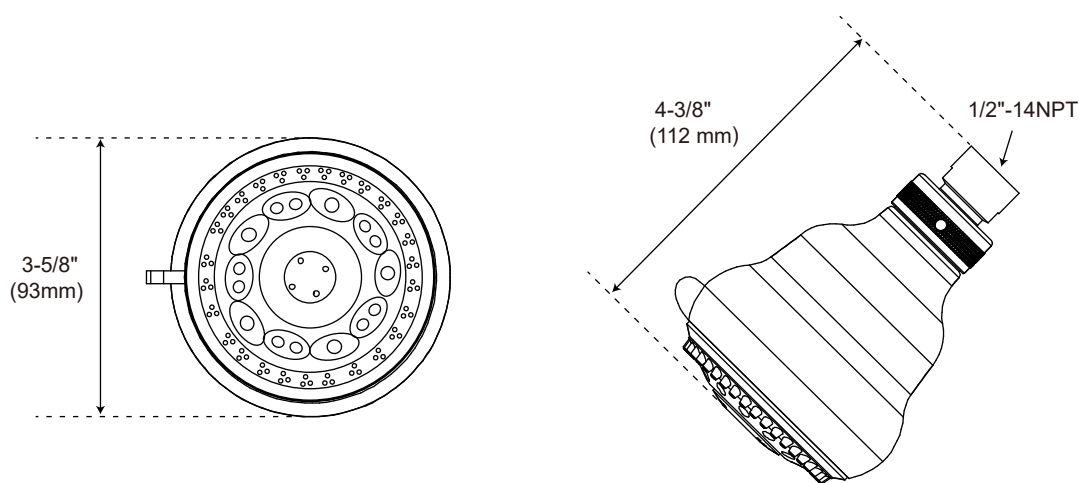

For detailed warranty information, visit ferguson.com/proflo-faucet-warranty.