

PFSH305G SHOWER HEAD



Product Features

- Brass and ABS construction
- 1/2" connection
- Single-function
- Easy-clean nozzles
- Max. flow rate 1.75 gpm (6.6 L/min) at 80 psi



Codes and Certifications



- Certified to ASME A112.18.1 / CSA B125.1
- cUPC/IAPMO listed
- EPA WaterSense certified



PFSH305GCP

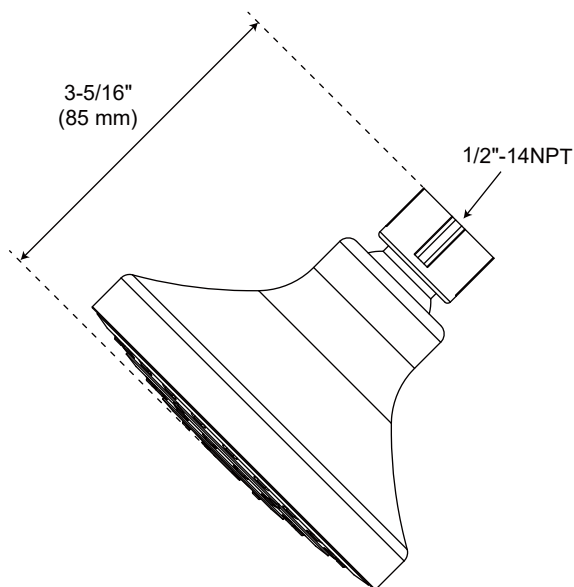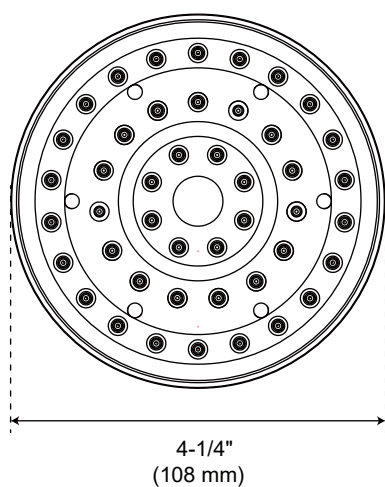

For detailed warranty information, visit ferguson.com/proflo-faucet-warranty.