

FFEF3052T D/S

FREESTANDING RANGE

30" ELECTRIC



AVAILABLE COLORS



Black
Stainless



Stainless

PRODUCT DIMENSIONS

| | |
|----------------------|---------|
| Height (Max.) | 47" |
| Width | 29-7/8" |
| Depth (Incl. Handle) | 28-1/2" |

MORE EASY-TO-USE FEATURES

Store-More™ Storage Drawer

With the Store-More™ Storage Drawer, you will have extra space to store your cookware.

Built with American Pride

Designed, engineered and assembled in the U.S.A.

Manual Clean Oven

SIGNATURE FEATURES

Quick Boil

Get meals on the table faster with our 3,000W element — water boils faster than the traditional setting.

Keep Warm Zone

Keep food warm until everything — and everyone — is ready.

SpaceWise® Expandable Elements

Flexible elements expand to meet your cooking needs — big or small.

Extra-Large Window

Check on the status of your dish without having to open the oven door.

| ELEMENTS | SIZE | WATTS |
|-------------|------------------|-------------|
| Right Front | 6"/9" Expandable | 1,400/3,000 |
| Right Rear | 6" | 1,200 |
| Left Front | 9" | 3,000 |
| Left Rear | 6" | 1,200 |
| Center | Keep Warm Zone | 100 |

FFEF3052T D/S FREESTANDING RANGE

30" ELECTRIC

FRIGIDAIRE

FEATURES

| | |
|-------------------------------|------------------------|
| Oven Control/Timing System | Ready-Select® Controls |
| Surface Type | Black Ceramic Glass |
| Window | Extra-Large |
| Exterior Door Finish | Stainless Steel |
| Handle Design | Stainless Steel |
| Exterior Finish (Side Panels) | Black |
| Convection System | |
| Oven Cleaning System | Manual Clean |
| Drawer Functionality | Storage |

OVEN CONTROLS

| | |
|--------------------|---------------------|
| Bake | Yes |
| Broil | Variable (High/Low) |
| Add-a-Minute | |
| Delay Start | |
| Self-Clean | |
| Quick Clean Option | |
| Delay Clean | |
| Kitchen Timer | Yes |
| Timed Cook Option | Yes |
| Auto Oven Shut-Off | |

COOKTOP FEATURES

| | |
|------------------------------|--|
| Right Front Element (Watts) | SpaceWise® Expandable 6"/9" - 1,400/3,000 |
| Right Rear Element (Watts) | 6" - 1,200 |
| Left Front Element (Watts) | 9" - 3,000 |
| Left Rear Element (Watts) | 6" - 1,200 |
| Center Element (Watts) | 100 - Warm and Serve |
| Hot Surface Indicator Light | Yes |
| Element "On" Indicator Light | Yes |
| Coil Cooktop/Drip Bowls | |

OVEN FEATURES

| | |
|------------------------------------|------------------------|
| Capacity (Cu.Ft.) | 4.9 |
| Oven Light | 1 |
| Hidden Bake Element | |
| Rack Configuration | 2 Standard |
| Baking System | Even Baking Technology |
| Broiling System | Vari-Broil™ Hi/Lo |
| Bake Element/Broil Element (Watts) | 2,600/3,000 |

SPECIFICATIONS


| | |
|--|-------------------------|
| Oven Interior (H x W x D) | 19-3/4" x 23" x 18-3/4" |
| Power Supply Connection Location | Middle Bottom Rear |
| Voltage Rating | 240V/208V/60Hz |
| Connected Load (kW Rating) @ 240/208 Volts | 12.5/9.5 |
| Minimum Circuit Required (Amps) | 40 |
| Shipping Weight (Approx.) | 165 Lbs. |

PRODUCT DIMENSIONS

| | |
|--------------------------|---------|
| A - Height (Max.) | 47" |
| B - Width | 29-7/8" |
| C - Depth (Incl. Handle) | 28-1/2" |
| Depth with Door Open 90° | 45" |

CABINET CUTOUT DIMENSIONS

| | |
|-------------------|-----|
| Height (Standard) | 36" |
| Width (Min.) | 30" |
| Depth (Min.) | 24" |

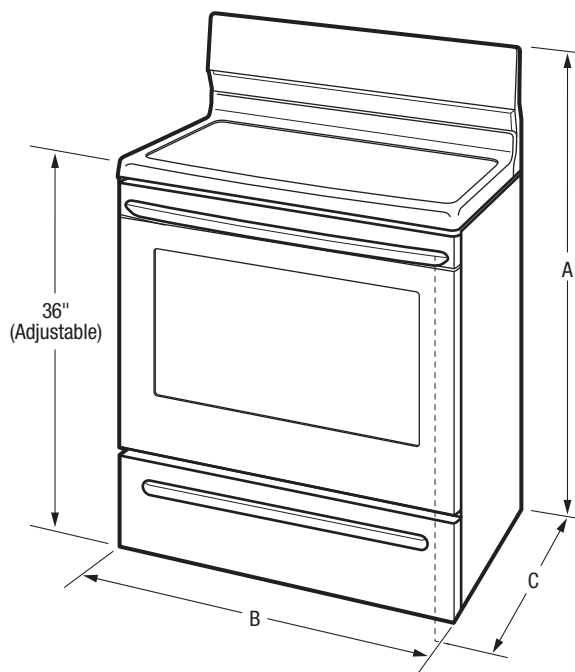

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.

Specifications subject to change. Accessories information available on the web at frigidaire.com

FRIGIDAIRE


USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FFEF3052T 11/17

© 2017 Electrolux Home Products, Inc.

30" ELECTRIC

FRIGIDAIRE

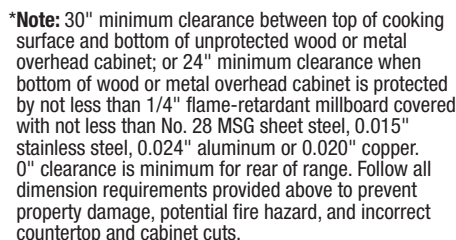

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) - 165 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz, fused on both sides of line with ground.
- Connected Load (kW Rating) @ 240/208 Volts = 12.5/9.5kW
- Recommended Circuit Breaker - 40 Amps
- Always consult local and national electric codes.
- Make sure wall coverings around range can withstand heat generated by range.
- Floor beneath range MUST be solid and level.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Range can be installed flush to wall with 0" minimum rear clearance.

- Minimum 1" clearance required from edge of rangetop to nearest combustible wall on either side of range above 36" height.
- Allow 30" minimum clearance between top of cooking surface and bottom of unprotected wood or metal overhead cabinet; or 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Follow all dimension requirements provided to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.



FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.

Specifications subject to change. Accessories information available on the web at frigidaire.com

FFFF3052T 11/17

© 2017 Electrolux Home Products, Inc.