

KALLISTA®

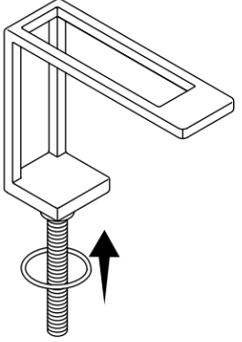
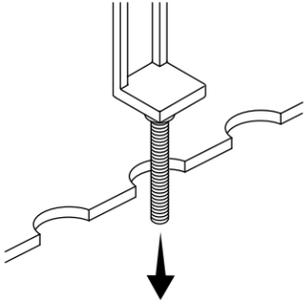
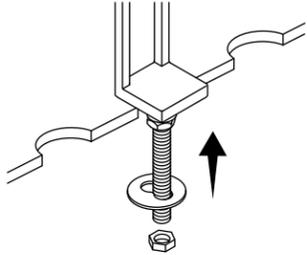
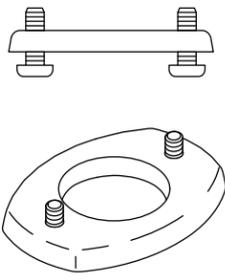
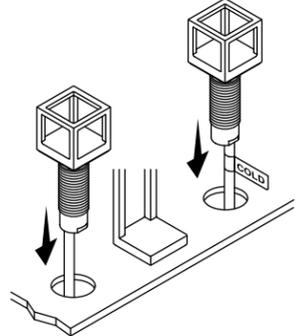
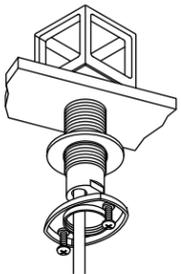
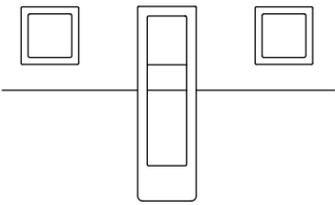
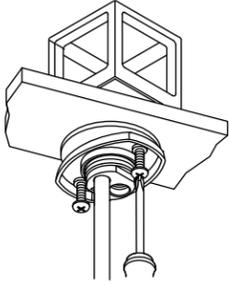
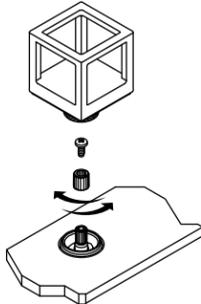
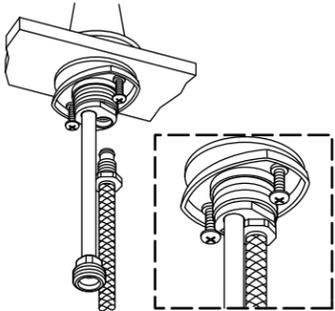
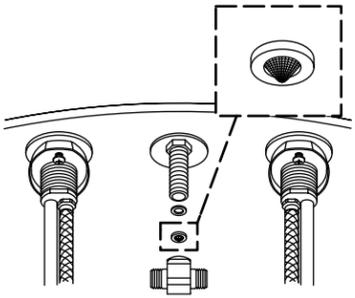
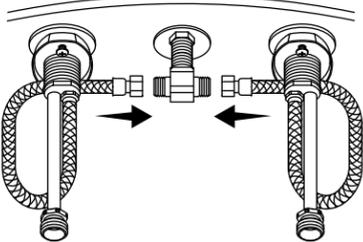

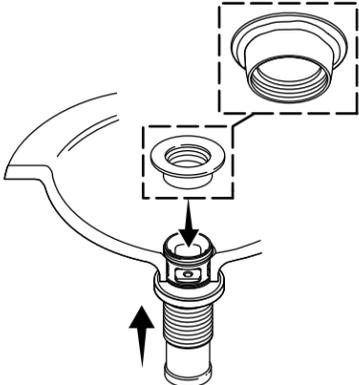
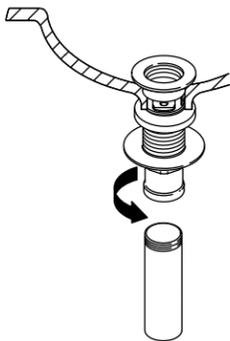
Installation Guide




Thread Sealant

100% Silicone Sealant


Stainless (Non-Staining)
Plumbers Putty

<p>Record your model number.</p>	<p>Important Information If possible, assemble the faucet to the sink before installing the sink. Observe all local codes. Shut OFF the water supply.</p>	<p>Do not use petroleum-based plumbers putty on marble or stone surfaces.</p>	<p>1 Clean the sink surface.</p> 	<p>2 Install the O-ring to the underside of the spout.</p> 
<p>3 Insert the spout.</p> 	<p>4 Slide the washer onto the shank. Secure with the nut.</p> 	<p>5 Partially thread the screws into the rings.</p> 	<p>6 Insert the COLD handle on the right and the other handle on the left.</p> 	<p>7 Loosely secure the handles with the washers and threaded rings.</p> 
<p>8 Turn the handles to the OFF position.</p> 	<p>9 Position the screws to the front and back. Tighten to secure.</p> 	<p>10 Handle Adjustment: Remove the handle, screw, and spline adapter. Reposition the spline adapter. Reinstall the screw and handle, and check handle alignment. Repeat as needed.</p> 	<p>11 Connect the provided hoses to the valves.</p> 	<p>12 Insert the screen washer and nylon washer into the tee with the screen washer cone toward the tee. Thread the tee onto the shank.</p> 
<p>13 Connect the hoses to the tee.</p> 	<p>14 Disassemble the drain.</p> 	<p>15 Apply plumbers putty to the flange and attach.</p> 	<p>16 Tighten the nut. Apply thread sealant to the drain pipe threads.</p> 	<p>17 Install the stopper. Connect the trapway. Wipe away excess putty.</p> 

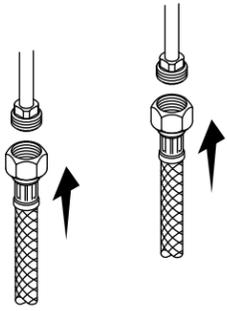
18 Connect the supply hoses to the valves.



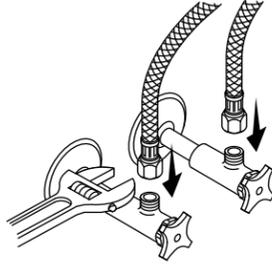
19 Connect the supply hoses to the supply stops.



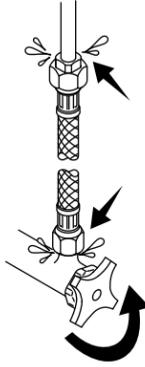
20 Turn ON the water supplies. Check for leaks.



21 Remove the aerator.

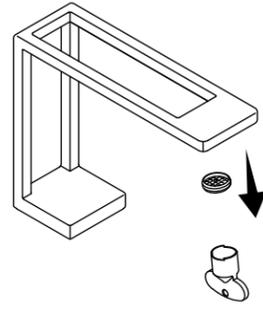

22 Run water to flush debris.

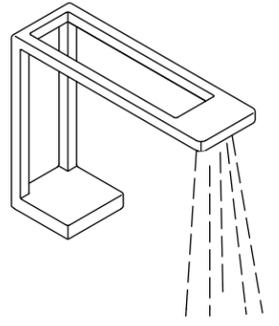

23 Turn OFF the water. Install the aerator.

