




JP2700-xx-6-EXT
GREASE TRAP EXTENSION

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

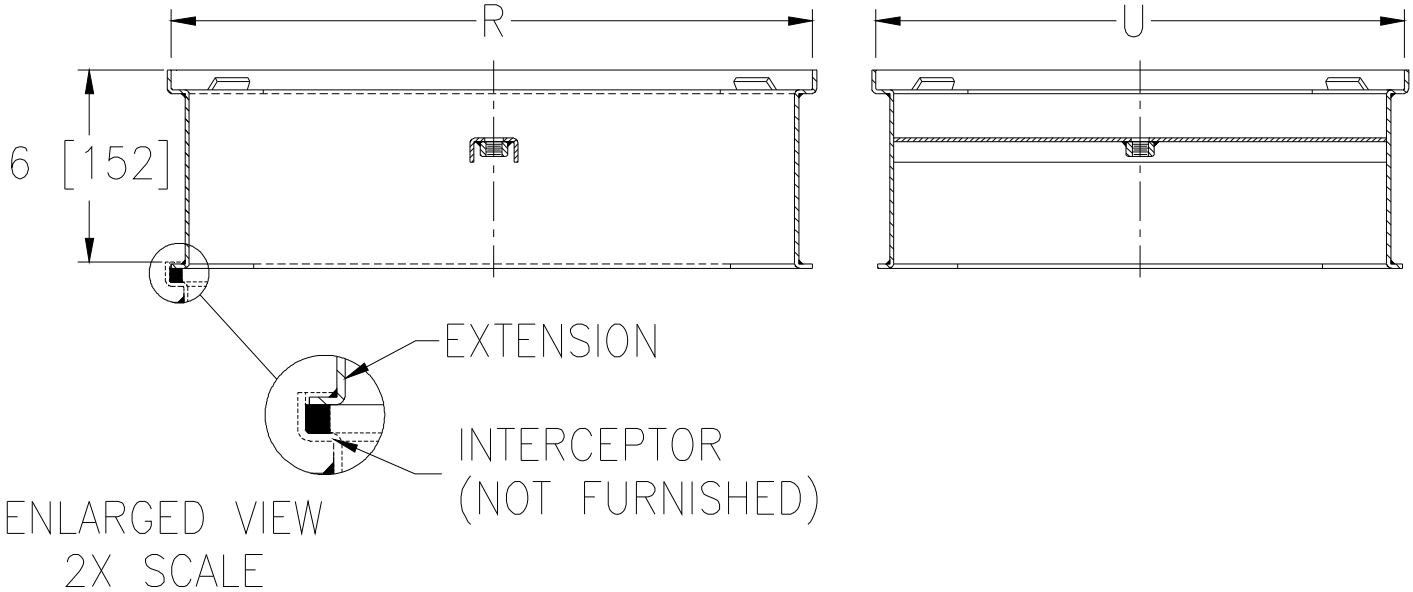

Model Number	Approx Wt. Lbs. [kg]	Dimension in Inches	
		R	U
___ JP2700-4-6-EXT	11 [5]	13-1/4 [337]	9-5/8 [244]
___ JP2700-7-6-EXT	13 [6]	14-5/8 [371]	11-5/8 [295]
___ JP2700-10-6-EXT	15 [7]	16-5/8 [422]	13-3/4 [349]
___ JP2700-15-6-EXT	17 [8]	18-5/8 [473]	16-1/2 [419]
___ JP2700-20-6-EXT	19 [9]	21-1/2 [546]	17 [432]
___ JP2700-25-6-EXT	21 [10]	23-1/2 [597]	19-5/8 [498]
___ JP2700-35-6-EXT	23 [10]	25-3/8 [645]	22-1/4 [565]
___ JP2700-50-6-EXT	25 [11]	27-1/4 [692]	24-1/4 [616]
___ JP2700-75-6-EXT	27 [12]	32-1/4 [819]	28-3/8 [721]
___ JP2700-100-6-EXT	30 [14]	36-1/4 [921]	33-3/8 [848]

JP2700-xx-6-EXT Grease Trap Extension
Corrosion-resistant coated fabricated steel.

- * Standard 6 [152] Increments
- * Ability to use more than one (Stackable)

* Regularly furnished unless otherwise specified.