

30-INCH DOUBLE WALL OVEN

HWO230 | HERITAGE COLLECTION



AVAILABLE MODELS

Heritage 30" Double Wall Oven - Stainless Steel HWO230ES with Epicure Style Handle

HWO230PS Heritage 30" Double Wall Oven - Stainless Steel

with Pro Style Handle

HWO230FS Heritage 30" Double Wall Oven - Stainless Steel

with Flush Handle

Heritage 30" Double Wall Oven - DacorMatch Color System with Epicure Style Color Matching HWO230EC

Heritage 30" Double Wall Oven - DacorMatch Color System with Pro Style Color Matching HWO230PC

Handle

(End Caps in Stainless Steel

Heritage 30" Double Wall Oven - DacorMatch HWO230FC

Color System with Flush Handle


FEATURES & BENEFITS

- → Four-Part Pure Convection System provides superior heat distribution, and eliminates flavor transfer.
- RapidHeat™ Broil Element uses an 8-pass radiant ribbon element to broil food quickly and evenly.
- 4.8 cu. ft. oven capacity.
- 7 rack positions for multi-rack cooking.
- SoftShut™ doors.
- ${\sf GlideRacks}$
- Self-Cleaning mode.
- Sabbath mode.


ACCESSORIES (INCLUDED)	
GLIDERACK™	2 (UPPER) / 2 (LOWER)
STANDARD RACK	1 (UPPER) / 1 (LOWER)
TEMPERATURE PROBE	1
	'
ACCESSORIES (OPTIONAL)	
COOKIE SHEETS (SET OF 3)	ACSRO303
BROIL-ROASTING PAN SET	AORPVR
GENERAL PROPERTIES	
COOKING MODES BOTH CAVITIES	PURE CONVECTION™ CONVECTION BAKE CONVECTION BROIL CONVECTION ROAST BAKE BROIL
ADDITIONAL FEATURES	
CLEANING TYPE	SELF CLEAN &
	GREENCLEAN™
RACK POSITIONS	7
CONVECTION TYPE	PURE CONVECTION™
LIGHTING	HALOGEN
OVEN PERFORMANCE	
BAKE ELEMENT	3,000W - 8 PASS
BROIL ELEMENT	3,500W - 8 PASS
CONVECTION ELEMENT	2,200W
CONTROL FEATURES	
DELAY TIME COOKING	YES
TIMED COOKING	YES
AUTOMATIC HOLD	YES
10-KEY PAD CLOCK	YES
TWO TIMERS	YES
SABBATH MODE	YES
CHILD LOCK	YES
ADDITIONAL MODES	
KEEP WARM	YES
PROOF	YES
DEHYDRATE	YES
TEMPERATURE PROBE	YES
TECHNICAL DETAILS	
CIRCUIT BREAKER (A)	50
VOLTS (V)	240
FREQUENCY (HZ)	60
ENERGY SOURCE	ELECTRIC
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	50 5/8" X 29 7/8" X 25"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	50" X 28 5/8" X 24"
OVEN CAPACITY (CUBIC FEET)	4.8 EACH
OVEN CAPACITY (CODIC FEET)	
WARRANTY	




APPLIANCE DIMENSIONS		
30"		
А	29 7/8" (75 .9 CM)	WIDTH (FACE)
В	28 1/2" (72.4 CM)	WIDTH (CHASSIS)
С	50 1/8" (127.3 CM)	HEIGHT (OVERALL)
D	49" (124.5 CM)	HEIGHT (CHASSIS)
Е	1 1/8" (2.9 CM)	TOP OF CHASSIS TO TOP OF CONTROL PANEL
F	6 1/2" (16.5 CM)	UTILITY CUTOUT (WIDTH)
G	5" (12.7 CM)	UTILITY CUTOUT (HEIGHT)
Н	7 7/8" (20.0 M)	UTILITY CUTOUT (DEPTH)
J	11/4" (3.2 CM)	CONTROL PANEL (DEPTH)
K	23 3/4" (60.3 CM)	DEPTH (CHASSIS)

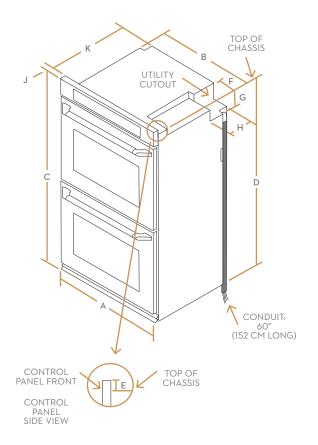

INSTALLATION CUTOUT DIMENSIONS		
CABINET	INSTALL DIMENSION	
N	30" (76.2 CM)	
Р	MIN. 28 5/8" (72.7 CM) RECOMMENDED MAX. 29 1/8" (74.0 CM)	
R	MIN. 49 1/8" (124.8 CM) RECOMMENDED MAX. 50" (127.0 CM)	

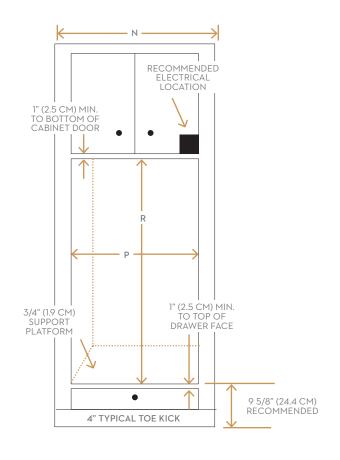



All tolerances: ±/- 1/16 (+/-1.6MM) unless otherwise stated.