


**ODYN™ CUSTOM**



# MAD8152\*\* Ceiling Fan

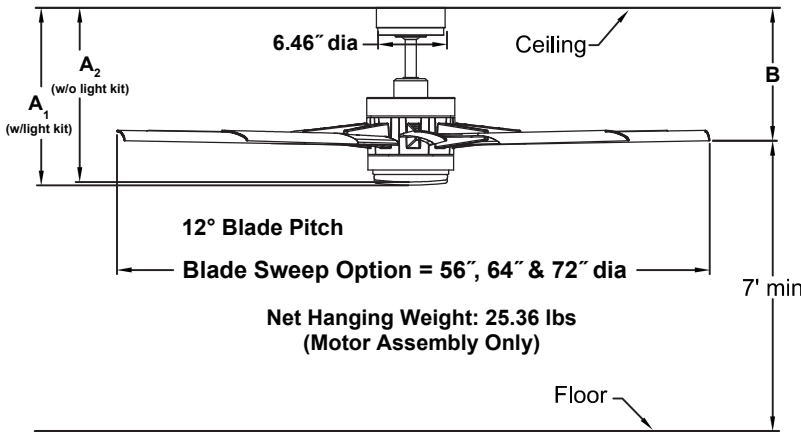

	A <sub>1</sub>	A <sub>2</sub>	B
Fan w/6" downrod	16.64"	16.33"	12.46"
Fan w/12" downrod	22.64"	22.33"	18.46"
Fan w/18" downrod	28.64"	28.33"	24.46"
Fan w/24" downrod	34.64"	34.33"	30.46"
Fan w/36" downrod	46.64"	46.33"	42.46"
Fan w/48" downrod	58.64"	58.33"	54.46"
Fan w/60" downrod	70.64"	70.33"	66.46"
Fan w/72" downrod	82.64"	82.33"	78.46"

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

DC165NM sensorless DC motor is designed for optimal performance with this fan.

### BLADES:

A set of nine 23", 28" and 32" all weather composite blades—sold separately.

### LIGHTING OPTIONS:

One 18-watt LED included.

### CONTROL OPTIONS:

TR205 hand-held remote control is included. Push button remote control with variable fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206 wall control is available—sold separately. Instruction is provided with each control.

### DOWNROD OPTIONS:

Fan comes with 1" dia. x 6" long wet-location downrod (DR1SS-6). Optional wet-location downrods are available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 24" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry, damp and wet locations.

### Available Finishes

BLW	Black with Opal Frosted Glass/Steel Cap
BNW	Brushed Nickel with Opal Frosted Glass /Steel Cap
DZW	Dark Bronze with Opal Frosted Glass/Steel Cap
GRW	Matte Greige with Opal Frosted Glass/Steel Cap
MWW	Matte White with Opal Frosted Glass/Steel Cap

### Airflow / Energy Efficiency Info (120V)

Energy Star test with BPW8152-72 Blade in 72" sweep

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	86	10742	289	0.43	37
Med	59	7904	726	0.15	11
Low	29	4303	1674	0.05	3

### Energy Guide FTC

Measured with BPW8152-72 Blade in 72" sweep

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
18	5639	5	305

### Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1400	3000	90%