

Tech Data

Viega PureFlow® Press Commercial Ball Valves



Description

The Viega PureFlow Press commercial ball valve available in sizes from 1" to 2" is equipped with a zero lead bronze body, stainless steel ball and EPDM seals.

Features

- Stainless Steel Ball
- PTFE Seat
- Brass Stem
- EPDM Stem Seals

Ratings

- Temperature Range: 0°F - 180°F
- Max. Operating Pressure: 160 psi

Approvals



- cCSAus: CSA B137.5, CSA B125.3
- UPC®
- NSFus-pw-372
- NSF / ANSI 359
- ASTM F877
- ASTM F3347



This document is subject to updates. For the most current Viega technical literature please visit www.viega.us.



Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**




Zero lead identifies Viega products meeting the lead free requirements of NSF 61-G through testing under NSF/ANSI 372 (0.25% or less maximum weighted average lead content.)

Component	Material
Body	Zero Lead Bronze
Ball	Stainless Steel
O-Ring	EPDM
Seat	PTFE
Stem	Brass
Stem Seals	EPDM
Handle	Steel Zinc-Plated
Handle Cover	Plastic
Locator Ring	Plastic Polystyrene
Press Sleeve	Stainless Steel

Viega PureFlow Press Ball Valve Zero Lead Brass P x P - Model 2870ZL*

*Can use Ball Valve Stem Extension Kit Model 2971.96

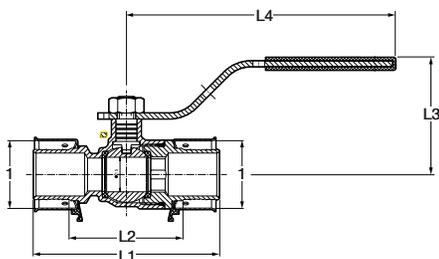

Part No.	Size (in) d	L1 (in)	L2 (in)	L3 (in)
98200	1	3.15	1.89	1.99
98201	1¼	3.60	1.87	2.10
98202	1½	3.88	2.15	2.47
98203	2	4.57	2.44	2.69



Viega LLC

585 Interlocken Blvd.
Broomfield, CO 80021

Phone (800) 976-9819
www.viega.us

TD-PF 0321 PureFlow Press Commercial Ball Valves

