

GROOVED CHECK VALVES




Size	Item #
2"	700-225-00500
2½"	700-225-00520
3"	700-225-00540
4"	700-225-00560
6"	700-225-00580
8"	700-225-00400



General Specifications:

- Can be installed in both Horizontal and Vertical line with upward flow
- Easier and Faster to Maintain
- Low Pressure Drop
- EPDM non-stick leak tight seal
- All Stainless steel parts to provide superior corrosion resistance
- UL/ULC Listed and FM Approved

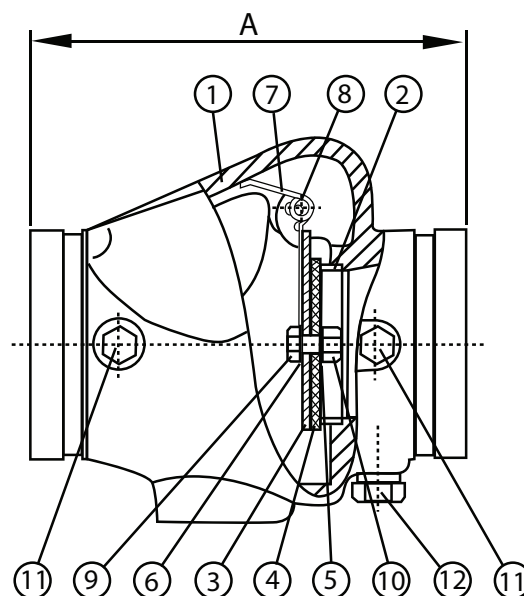

Dimensions

Size	A	Weight
In.	In.	lbs
2"	6.65	5.5
2½"	7.20	8.8
3"	7.80	13
4"	8.58	20
6"	10.63	42
8"	12.80	77

Material Specification

PART	Specification
1. Body	Ductile Iron ASTM A 536
2. Seat	Bronze
3. Clapper	Stainless Steel 304
4. Facing Seal	EPDM Rubber
5. Clamping Ring	Stainless Steel 304
6. Gasket	EPDM Rubber
7. Spring	Stainless Steel 304
8. Hinge Pin	Stainless Steel 304
9. Bolt	Stainless Steel 304
10. Lock Nut	Stainless Steel 304
11. Plug ¼" NPT	Carbon Steel
12. Plug ½" NPT	Carbon Steel