


09279 ROUGH VALVE

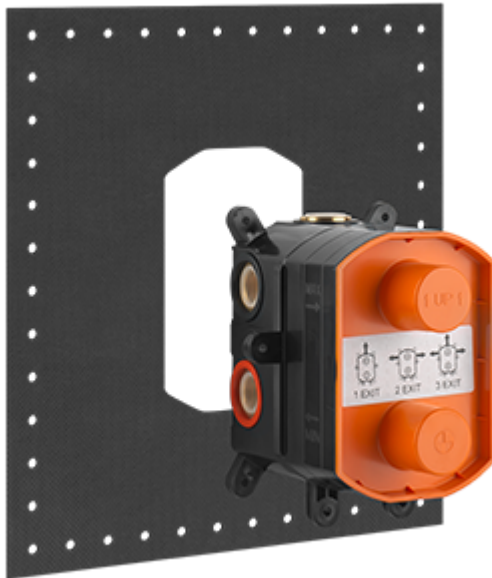

Technical features

- 1/2" connections
- Vertical/Horizontal application
- Anti-scalding
- Max flow rate at 43 PSI
6.1 GPM exit 1 - 5.7 GPM exit 2 - 5.8 GPM exit 3

Certifications

The official approvals of this item in standard Gessi version are
(For additional approvals contact Gessi S.p.A.):

- Certified to ASME A112.18.1/CSA B125.1

Available Finishes

Technical Prescription

- working maximum pressure value 5 bar - in case of higher pressure, to use a pressure reducer
- Working pressure for an optimal installation: 3 bar
- Working water temperature not be higher than 70°C.
- In order to guarantee a long duration of the product and its total functionality install filter
- Test watertight and cleaning of the pipes before installing the tap.