




Architect/Engineering Specifications:

4" wall mount electronic sensor faucet with polished chrome plated brass body with 4 1/8" rigid gooseneck, 2.2 GPM vandal resistant aerator, AC/DC control module with internal flow control setting switches, temperature control mixing valve with integral check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements.

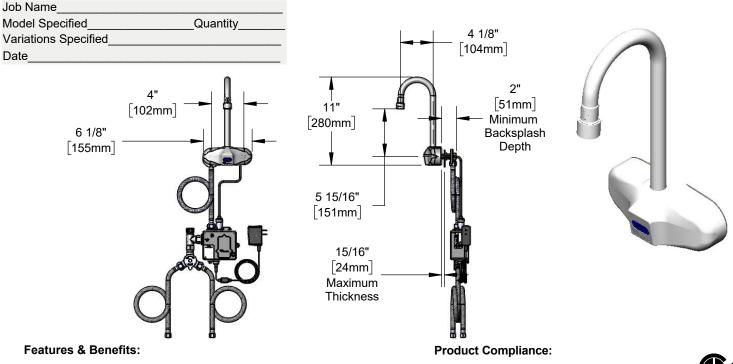

- 4" wall mount faucet w/ polished chrome plated brass body 4 1/8" rigid gooseneck
- 2.2 GPM vandal resistant aerator, Series 6 (B-0199-06)
- Water resistant control module w/ internal flow control switches for adjusting auto time out & shut off delay settings
- Optional auto flush feature flows water for 30 seconds after every 12 inactive hours
- Plug in AC transformer or (4) AA battery (DC) power options
- · Mechanical temperature mixing valve with integral check valves
- 18" flexible stainless steel supply hoses with 3/8" compression connections
- Low battery LED indicator light
- Material: Polished chrome plated brass body and gooseneck

Optional Outlets (Series 1/ VR Series 6)

• ASME A112.18.1 / CSA B125.1

- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- UL 1951

Warranty: Three Year (Limited)

Performance Data:

- Pressure: 20 125 psi
- Temperature: 40 °F 140 °F
- Flow Rate: 2.2 GPM @ 60 psi
- Water Consumption: @ 10 sec = .37 gal
 - @ 15 sec = .55 gal

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	□ B-0199-01-N035	N/A	□ B-0199-06-N035
0.5	N/A	□ B-0199-01-N05	N/A	□ B-0199-06-N05
1.0	□ B-0199-01-F10	N/A	□ B-0199-06-F10	N/A
1.2	□ B-0199-01-F12	2 □ B-0199-01-LF12	□ B-0199-06-F12	□ B-0199-06-LF12
1.5	□ B-0199-01-WS	□ B-0199-29	□ B-0199-06-WS	□ B-0199-29VR
2.2	□ B-0199-01	□ B-0199-21	Standard	□ B-0199-21-VRF



&S BRASS AND BRONZE WORKS, INC.









