


Activator 2 Ply MERV 6 & Activator 3 Ply MERV 7 Ring and Link Panel Filters



Link

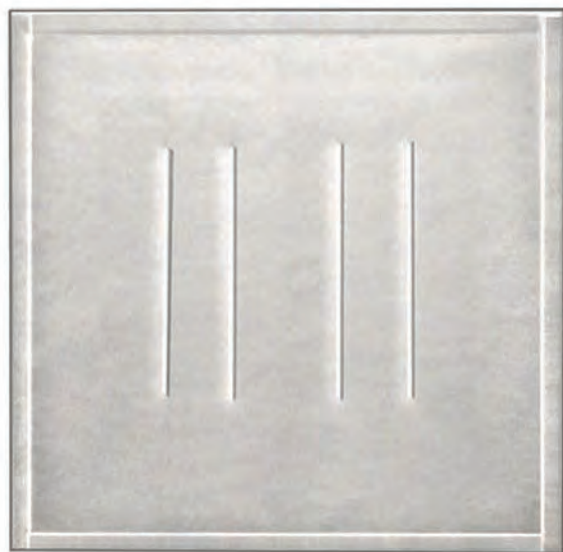

2-Ply MERV-6



3-Ply MERV-7

- Self-Sealing
- Eliminates Bypass
- Moisture Resistant
- Totally Unitized Assembly
- Fast, Easy Installation
- No Latches Required
- Compact Packaging

HVAC - RING AND LINK PANEL FILTERS

Activator 2 Ply MERV 6 & Activator 3 Ply MERV 7 Ring and Link Panel Filters

Part Number	Ply	Nominal Size (In.)	Actual Size of Internal Frame (In.)	Rated Air Flow Capacity (CFM)	
				@300 FPM	@500 FPM
ACT-217	2 Ply	10 x 20	9-1/2 x 19-1/2	425	700
ACT-210	2 Ply	12 x 24	11-3/8 x 23-3/8	600	1000
ACT-245	2 Ply	15 x 20	14-1/2 x 19-1/2	630	1050
ACT-201	2 Ply	16 x 20	15-1/2 x 19-1/2	670	1120
ACT-216	2 Ply	16 x 24	15-3/8 x 23-3/8	800	1340
ACT-202	2 Ply	16 x 25	15-1/2 x 24-1/2	840	1400
ACT-212	2 Ply	18 x 24	17-3/8 x 23-3/8	900	1500
ACT-203	2 Ply	20 x 20	19-1/2 x 19-1/2	840	1400
ACT-211	2 Ply	20 x 24	19-3/8 x 23-3/8	1000	1670
ACT-204	2 Ply	20 x 25	19-1/2 x 24-1/2	1050	1750
ACT-205	2 Ply	24 x 24	23-3/8 x 23-3/8	1200	2000
ACT-225	2 Ply	25 x 25	24-1/2 x 24-1/2	1310	2170
ACT-317	3 Ply	10 x 20	9-1/2 x 19-1/2	425	700
ACT-310	3 Ply	12 x 24	11-3/8 x 23-3/8	600	1000
ACT-345	3 Ply	15 x 20	14-1/2 x 19-1/2	630	1050
ACT-301	3 Ply	16 x 20	15-1/2 x 19-1/2	670	1120
ACT-316	3 Ply	16 x 24	15-3/8 x 23-3/8	800	1340
ACT-302	3 Ply	16 x 25	15-1/2 x 24-1/2	840	1400
ACT-312	3 Ply	18 x 24	17-3/8 x 23-3/8	900	1500
ACT-303	3 Ply	20 x 20	19-1/2 x 19-1/2	840	1400
ACT-311	3 Ply	20 x 24	19-3/8 x 23-3/8	1000	1670
ACT-304	3 Ply	20 x 25	19-1/2 x 24-1/2	1050	1750
ACT-305	3 Ply	24 x 24	23-3/8 x 23-3/8	1200	2000
ACT-325	3 Ply	25 x 25	24-1/2 x 24-1/2	1310	2170

- All performance data is based on the ASHRAE 52.2 Test Standard
 - Width and height dimensions are interchangeable. Activator panels can be installed with the cross wires in the vertical or horizontal position.
- Continuous Operating Temperature Limit:** 220°F (104°C)
Underwriters Laboratories Classification: Activator panels are classified U.L. Class 2 per U.L. Standard 900. Class 1 panels are available.

	2-Ply	3-Ply
MERV Rating _____	6	7
Initial Resistance		
@300 FPM _____	.17"	.20"
@500 FPM _____	.35"	.39"
Recommended		
Final Resistance _____	1.0" W.G.	1.0" W.G.

All 2-ply and 3-ply models are available as link panel filters



Initial Resistance vs. Filter Face Velocity

