

### Features

- Katalyst® air-induction technology maximizes the air/water mix for a powerful, even flow
- MasterClean™ sprayface resists hard water build-up and is easy to clean.
- Single-function showerhead with 48 translucent nozzles.
- 4-1/2" (114 mm) diameter sprayface.
- 1.75 gpm (6.6 lpm) flow rate.
- Complements the Loure® collection.

### Material

- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Wall-mount
- Shower arm and flange not included.

### Recommended Accessories

K-14679 Shower Arm and Flange



### Codes/Standards




ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel

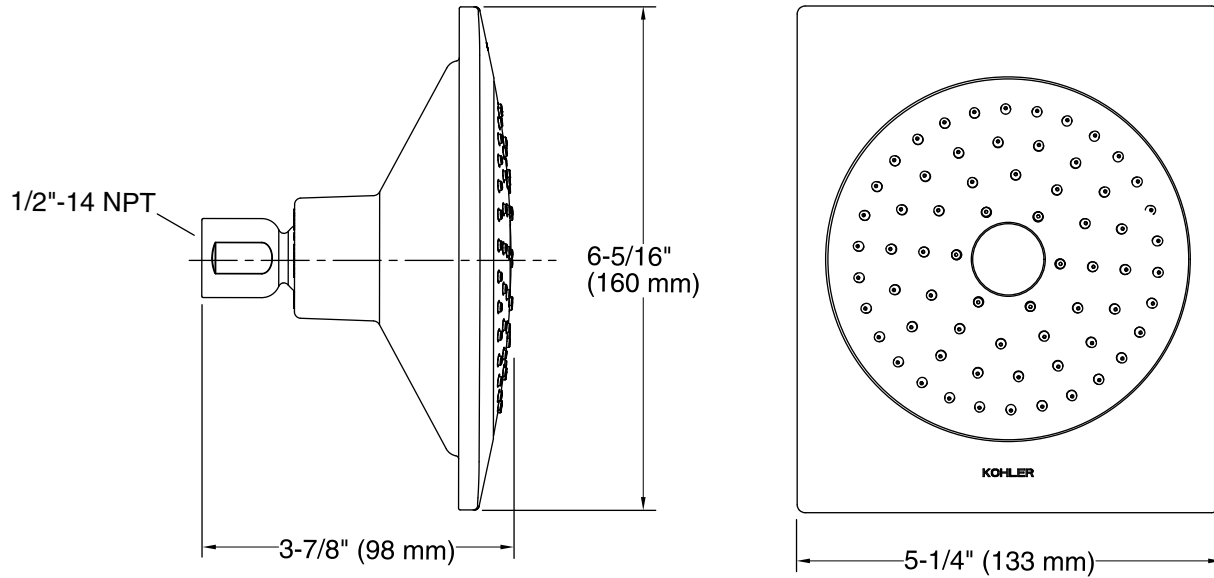

### Technical Information

All product dimensions are nominal.

#### Showerhead/Body Spray:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 80 psi (5.5 bar)

### Notes

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

Install this product according to the installation instructions.