

### Features

- With innovative Flipstream technology, the Flipside handshower dedicates a single sprayhead surface to each of the four unique sprays.
- Changing sprays is as easy as turning the head on its axis
- Ergonomic design is easy to use, even with soapy hands
- Koverage™ spray delivers full-coverage spray for everyday showering
- Kotton™ spray releases a dense, luxurious downpour of water
- Komotion™ spray delivers a soothing, circular water pattern
- Kurrent™ spray offers a targeted massage to ease away aches and pains
- 1.75 gpm (gallons per minute) flow rate
- Requires K-8593 or K-9514 shower hose (sold separately)

### Material

- KOHLER finishes resist corrosion and tarnishing

### Installation

- Bracket or sidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation
- WaterSense-labeled 1.75-gpm handshowers use up to 30 percent less water than standard 2.5-gpm handshowers while still meeting strict performance guidelines
- This product can help a building earn Water Efficiency points in the LEED Green Building Rating System™

### Required Products/Accessories

K-8593 72" Shower Hose

or

K-9514 60" Shower Hose



OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
OBC


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color  | Code | Description              |
|--|------|--------------------------|
|  | CP   | Polished Chrome          |
|  | SN   | Vibrant® Polished Nickel |
|  | BN   | Vibrant® Brushed Nickel  |
|  | 2BZ  | Oil-Rubbed Bronze        |

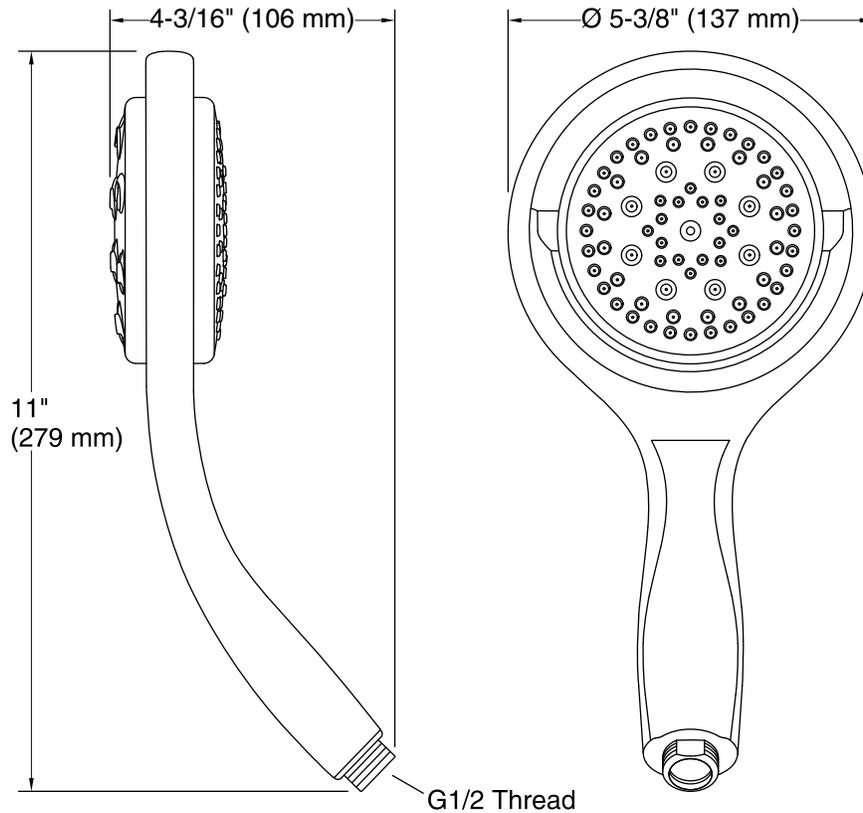

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.75 gal/min (6.6 l/min)

Pressure: 45 psi (3.1 bar)

#### Handshower:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 45 psi (3.1 bar)

### Notes

Install this product according to the installation instructions.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

OBC compliant when installed to the specific requirements of these regulations.