

### Features

- Katalyst® air-induction technology maximizes the air/water mix for a powerful, even flow.
- Optimized sprayface with 48 nozzles delivers a more focused coverage of large water droplets.
- Minimizes wasteful overspray and increases cleaning and hair-rinsing performance.
- 1.75 gpm (gallons per minute) flow rate.
- 1/2-inch NPT connection.
- Coordinates with Fairfax faucets and accessories.

### Material

- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Wall-mount

### Water Conservation & Rebates

- WaterSense-labeled 1.75-gpm showerheads use up to 30 percent less water than standard 2.5-gpm showerheads while still meeting strict performance guidelines
- This product can help a building earn Water Efficiency points in the LEED Green Building Rating System™

### Recommended Products/Accessories

K-7397 Shower Arm and Flange



### Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)



### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	2BZ	Oil-Rubbed Bronze

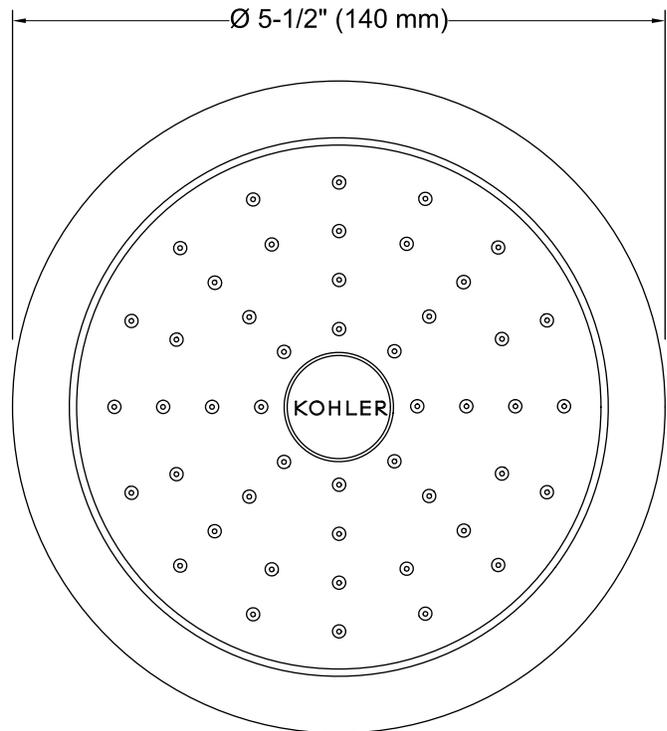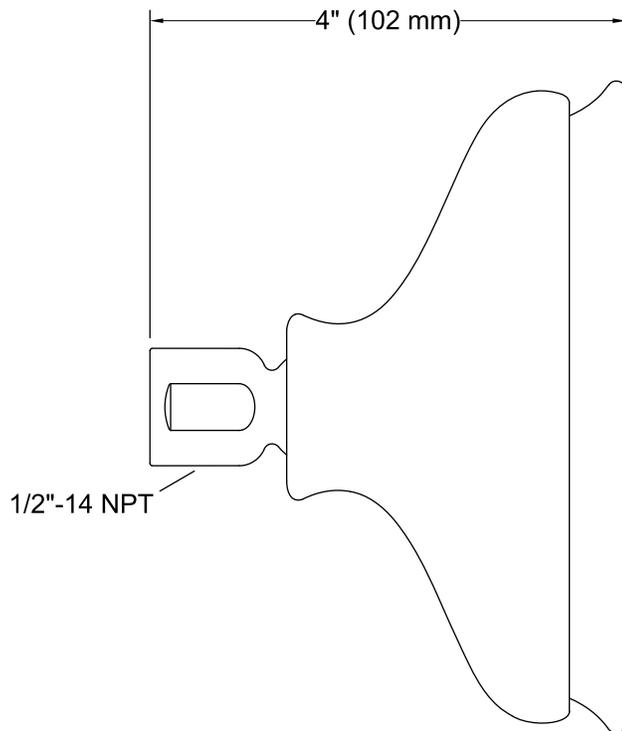

**Technical Information**

All product dimensions are nominal.

**Showerhead/Body Spray:**

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 80 psi (5.5 bar)

**Notes**

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

Install this product according to the installation instructions.